

JamSoftware

TreeSize

©1995-2022 by Joachim Marder e.K.

1. Overview	5
2. Installation	6
3. Quickstart	6
4. What's New	8
5. Knowledge Base	8
6. Using TreeSize	8
6.1 The Ribbon Bar	9
6.1.1 Application Menu	10
6.1.1.1 Export Submenu	12
6.1.1.2 Print Submenu	13
6.1.2 Quick Access Toolbar	14
6.1.3 Home Tab	15
6.1.4 Scan Tab	17
6.1.5 Tools Tab	19
6.1.6 View Tab	20
6.1.7 Help Tab	21
6.2 Scan Targets	22
6.3 Select a scan target	25
6.4 The Directory Tree	27
6.5 The TreeSize Views	30
6.5.1 Chart	30
6.5.2 Details	36
6.5.2.1 Available Columns	39
6.5.3 Extensions	42
6.5.4 Users	43
6.5.5 Age of Files	45
6.5.6 Top Files	47
6.5.7 History	49
6.6 Drive List	51
6.7 Snapshots	53
6.8 Disk Usage Comparison	54
6.9 Azure AD Configuration	56
6.10 Options Dialog	60
6.10.1 Scan	62
6.10.1.1 General	62
6.10.1.2 Filter	64
6.10.2 View	66
6.10.2.1 Display	66
6.10.2.2 Details	69

6.10.2.3	Directory Tree	70
6.10.2.4	File Groups	72
6.10.2.5	Age of Files	74
6.10.2.6	Charts	75
6.10.2.7	Top Files	76
6.10.3	Export	77
6.10.3.1	Printer	77
6.10.3.2	PDF	80
6.10.3.3	Excel	81
6.10.3.4	HTML	84
6.10.3.5	CSV	86
6.10.3.6	XML	88
6.10.3.7	Text	89
6.10.3.8	Email	91
6.10.4	System	95
6.10.4.1	Start	95
6.10.4.2	Context Menu	97
7.	Using the TreeSize File Search	97
7.1	The Ribbon Bar	99
7.2	Defining search paths	106
7.3	Basic Search	107
7.3.1	Search Syntax	108
7.4	Duplicate files	112
7.4.1	How to set up a duplicate search	115
7.4.2	How does the deduplication work?	117
7.5	Advanced search	118
7.5.1	How do I define search filters?	121
7.5.2	What types of filters are available?	123
7.6	Templates	126
7.7	How do I exclude files from the search?	127
7.8	What do I do with my search results?	128
7.9	File operations	130
7.9.1	Unicode Zip files	134
7.10	Bulk rename	135
7.11	Options Dialog	137
7.11.1	General	137
7.11.1.1	Search Engine	138
7.11.1.2	Exclude Filter	139
7.11.1.3	Export	141
7.11.1.4	Email	142
7.11.2	Personalize	144
7.11.2.1	View	145
7.11.2.2	File Groups	147
7.11.2.3	Templates	147
7.11.3	Other	148

7.11.3.1	Start	148
8.	Using Scheduled TreeSize Tasks	148
8.1	Schedule Dialog	149
8.1.1	Options	150
8.1.2	Export	152
8.1.3	File Operation	154
8.1.4	Advanced	156
8.1.5	Command Line	157
8.1.6	Schedule	158
8.1.7	All Tasks	159
8.2	Command Line Options	160
8.3	How to schedule a file search	175
8.4	How to schedule a move or delete operation	176
9.	Tips & Annotations	178
9.1	Notes on NTFS	178
9.2	Wasted Space	181
9.3	Regular Expressions	182
9.4	Translations	184
10.	Copyright & Contact	185
	Index	187

1 Overview

TreeSize is a powerful and flexible hard disk space manager for Windows.

Why TreeSize:

- Manage and clean up disk space efficiently
- Visualize disk usage
- Analyze in detail, down to all directory levels
- Find and remove redundant files
- Numerous export and reporting possibilities

Manage disk space and scan your hard disks

Find out which folders are the largest on your drives and recover precious disk space. Use TreeSize as a hard disk cleanup tool: find space hogs and remove them. Graphical analyses provide a quick visualization of disk space usage. TreeSize shows you folder size and allocated disk space as well as owner and permissions, the last access date, the NTFS compression rate, and much more information for selected folders or drives.

Search for Redundant Files

The integrated versatile [file search](#)⁹⁷ helps you find old, big, temporary, and duplicate files on drives, entire servers or the entire network. Search results can be moved, deleted or exported to a ZIP file.

Print or Export Results


You can print detailed reports or export the collected data to different formats (XML, XLS, TXT, CSV and many more). TreeSize also enables you to track disk space usage development over time via XML report comparison or snapshots.

The application has an intuitive Explorer-like user interface and supports drag-and-drop. It is fast, multi-threaded and supports Unicode- and NTFS-specific features. TreeSize can be started from the context menu of every folder or drive.

[Take a visual tour](#) or read our [product data sheet](#) to learn how to manage disk space with TreeSize.

2 Installation

To install TreeSize, execute the setup file and follow the instructions. TreeSize requires Windows 8.1, Server 2012, or upwards as well as .Net framework 4.8, which will be installed automatically when missing (Information regarding disk space management on other operating systems can be found on: <https://www.diskspacemanagement.com/>). The setup program will copy the necessary files to your hard disk and will create a new program group in the Start menu/screen. TreeSize can be uninstalled using the Software applet in the Windows Control Panel. You will find the installation key for the registered version on the license document (PDF) sent to you after the purchase. During your maintenance period the key will be provided in your customer area.

A portable installation on USB removable device can be created using the [ribbon bar "Tools"](#) .

Unattended Installation

Starting the *EXE-based installer* with the command line parameters

```
/SILENT /SUPPRESSMSGBOXES /PASSWORD=YourInstallKey
```

will perform a silent and automatic installation with the default settings. Please replace `YourInstallKey` with the installation key that you received after your registration. Using `/VERYSILENT` instead of `/SILENT` will prevent any visual feedback. The option `/DIR="x:\dirname"` can be used to override the default install path.

Customer with 25 or more licenses are able to download a 64Bit MSI installer in our [customer area](#). To perform a silent and unattended installation using the *MSI-Installer*, you need to use a command line like this for MsiExec:

```
msiexec /qn /i "TreeSize-x64-Full-EN.msi" INSTALLATION_KEY="XXXXXX-XXXXXX-XXXXXX-XXXXXX-XXXXXX-XXXXXX"
```

Please prefix the MSI file with the path of the network share, in which the MSI file is stored, and adjust the installation key. You may also set the property `INSTALLATION_KEY` by modifying the MSI file using a tool like [Orca](#).


Default settings

TreeSize stores its settings in the user profile by default. If there are no options stored yet, e.g. for the first start of the application, default settings will take effect. You can adjust these default settings system-wide by creating entries in the Windows registry for each setting at `HKEY_LOCAL_MACHINE\Software\JAM Software\TreeSize`.

To simplify this configuration, we provide administrative templates for the Group Policy Editor. You can download [them here](#).

3 Quickstart

After the installation, TreeSize can be started using the Windows Start menu/screen or the context menu of a folder or drive. These are the important elements of the TreeSize main window:

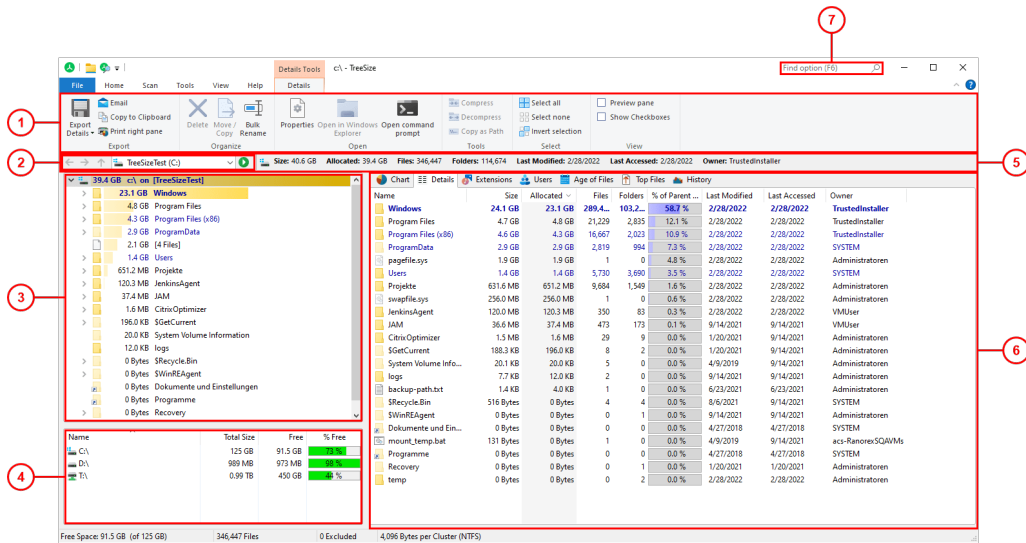

1 The Ribbon Bar provides access to all commands of TreeSize. It is divided into logical sections such as the "[Home](#)^[15]" tab containing commonly used functions and elements, or the "[View](#)^[20]" tab enabling you to customize the appearance of TreeSize. The colored tab to the right is a context-sensitive depending on the currently active view. Use the "[Select directory for scan](#)^[25]" to start the scanning process for a drive or folder.

2 This section contains a drop-down list enabling you to select a drive or folder to be scanned. You can enter paths directly in the control field. Press enter or click the scan button on the right to start a scan for the entered path. TreeSize will remember recently used paths and add them to the list.

3 The [Directory Tree](#)^[27] of the scanned folder or drive provides an immediate overview of the size of each folder.

4 The [Drive List](#)^[51] provides an overview of all local and mapped network drives. Additional network drives can be added using the context menu. Double-click on a drive to start a scan in TreeSize.

5 This section will provide additional information regarding the scanned path (e.g. its total size and the number of folders contained).

6 The view section contains several different tabs, each of them providing a highly specialized data view of the currently selected drive or folder. As soon as a view is activated, the corresponding context tab will become active on which you will find useful commands for this view. These are the available views of TreeSize:

- The "[Chart](#)^[30]" view **visualizes folder information** either as a "[Pie Chart](#)^[32]", "[Bar Chart](#)^[34]" or as a "[Treemap Chart](#)^[35]".
- The "[Details](#)^[36]" view will provide you **detailed information on all files and folders** contained in the current selected item in the [Directory Tree](#)^[27]
- The "[Extensions](#)^[42]" view presents information on size grouped by file types. Thus, you'll gain an overview of the types of **files that use up most of the disk space**.

- The "[Users](#)^[43]" view shows information on size grouped by users. You will see at a glance **which user uses how much space** in which folder.
- The "[Age of Files](#)^[45]" view shows the distribution of the **age of scanned files**, based on a certain date attribute.
- The "[Top Files](#)^[47]" view lists the **largest files** in the scanned path along with several other details.
- The "[History](#)^[49]" view shows changes in for the scanned path in a line chart.

7 The [Quick Access Toolbar](#)^[14] is a customizable shortcut to many useful functions of TreeSize.

8 The "Find option"-searchbox (available with Windows 10 or later) allows to search for functions and settings with an ease and trigger them directly, or navigate to them.

4 What's New


See [What's New](#) online.

5 Knowledge Base

See "[Knowledge Base](#)" online.

6 Using TreeSize

After the installation, TreeSize can be started using the Windows Start menu/screen or the context menu of a folder or drive. These are the important elements of the TreeSize main window:

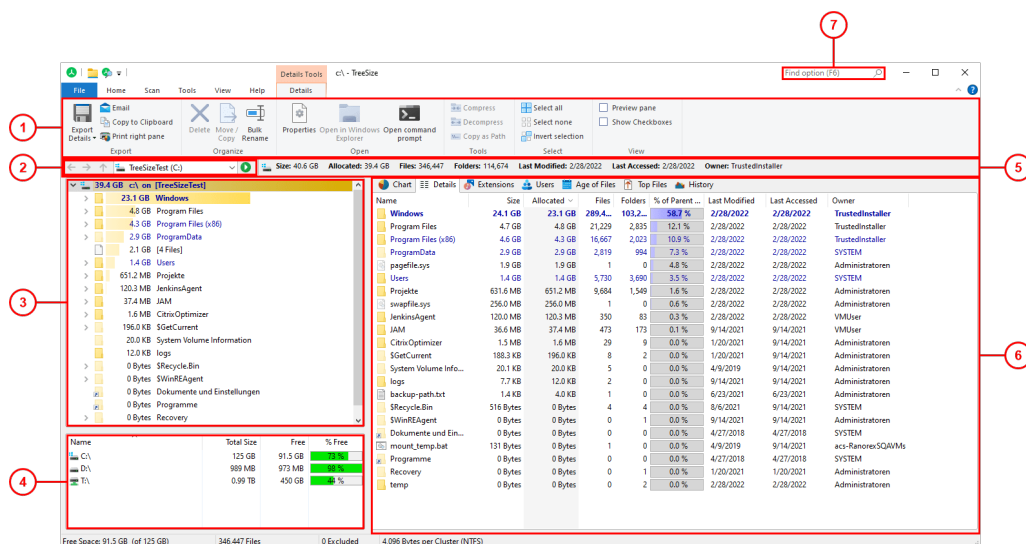

1 The Ribbon Bar provides access to all commands of TreeSize. It is divided into logical sections such as the "[Home](#)^[15]" tab containing commonly used functions and elements, or the "[View](#)^[20]" tab enabling you to customize the appearance of TreeSize. The colored tab to the right is a context-sensitive

- depending on the currently active view. Use the "[Select directory for scan](#)"^[25] to start the scanning process for a drive or folder.
- 2 This section contains a drop-down list enabling you to select a drive or folder to be scanned. You can enter paths directly in the control field. Press enter or click the scan button on the right to start a scan for the entered path. TreeSize will remember recently used paths and add them to the list.
 - 3 The [Directory Tree](#)^[27] of the scanned folder or drive provides an immediate overview of the size of each folder.
 - 4 The [Drive List](#)^[51] provides an overview of all local and mapped network drives. Additional network drives can be added using the context menu. Double-click on a drive to start a scan in TreeSize.
 - 5 This section will provide additional information regarding the scanned path (e.g. its total size and the number of folders contained).
 - 6 The view section contains several different tabs, each of them providing a highly specialized data view of the currently selected drive or folder. As soon as a view is activated, the corresponding context tab will become active on which you will find useful commands for this view. These are the available views of TreeSize:
 - The "[Chart](#)"^[30] view **visualizes folder information** either as a "[Pie Chart](#)"^[32], "[Bar Chart](#)"^[34] or as a "[Treemap Chart](#)"^[35].
 - The "[Details](#)"^[36] view will provide you **detailed information on all files and folders** contained in the current selected item in the [Directory Tree](#)^[27].
 - The "[Extensions](#)"^[42] view presents information on size grouped by file types. Thus, you'll gain an overview of the types of **files that use up most of the disk space**.
 - The "[Users](#)"^[43] view shows information on size grouped by users. You will see at a glance **which user uses how much space** in which folder.
 - The "[Age of Files](#)"^[45] view shows the distribution of the **age of scanned files**, based on a certain date attribute.
 - The "[Top Files](#)"^[47] view lists the **largest files** in the scanned path along with several other details.
 - The "[History](#)"^[49] view shows changes in for the scanned path in a line chart.
 - 7 The [Quick Access Toolbar](#)^[14] is a customizable shortcut to many useful functions of TreeSize.
 - 8 The "Find option"-searchbox (available with Windows 10 or later) allows to search for functions and settings with an ease and trigger them directly, or navigate to them.

6.1 The Ribbon Bar


The Ribbon Bar provides access to all commands of TreeSize. It is divided into the following logical sections, called "Tabs":

- [File](#)¹⁰ Allows you to select folders for scanning, to load, save, compare, export, and print collected data.
- [Home](#)¹⁵ Contains the most commonly used actions and elements of TreeSize.
- [Scan](#)¹⁷ Contains all actions and elements related to the current scan.
- [Tools](#)¹⁹ Contains useful TreeSize and Windows-specific functions.
- [View](#)²⁰ Contains all actions and elements influencing the general appearance of the application.
- [Help](#)²¹ Provides common help features, version information, and management functions for your product license.

In addition to these permanent tabs there are several so-called "context tabs" which depend on the currently [active view](#)³⁰ of TreeSize. They are highlighted in different colors.

6.1.1 Application Menu

The Application Menu (or "File" menu) allows you to select folders for scanning, loading, saving, exporting, or comparing collected data. It also provides access to the application settings and allows you to exit TreeSize.

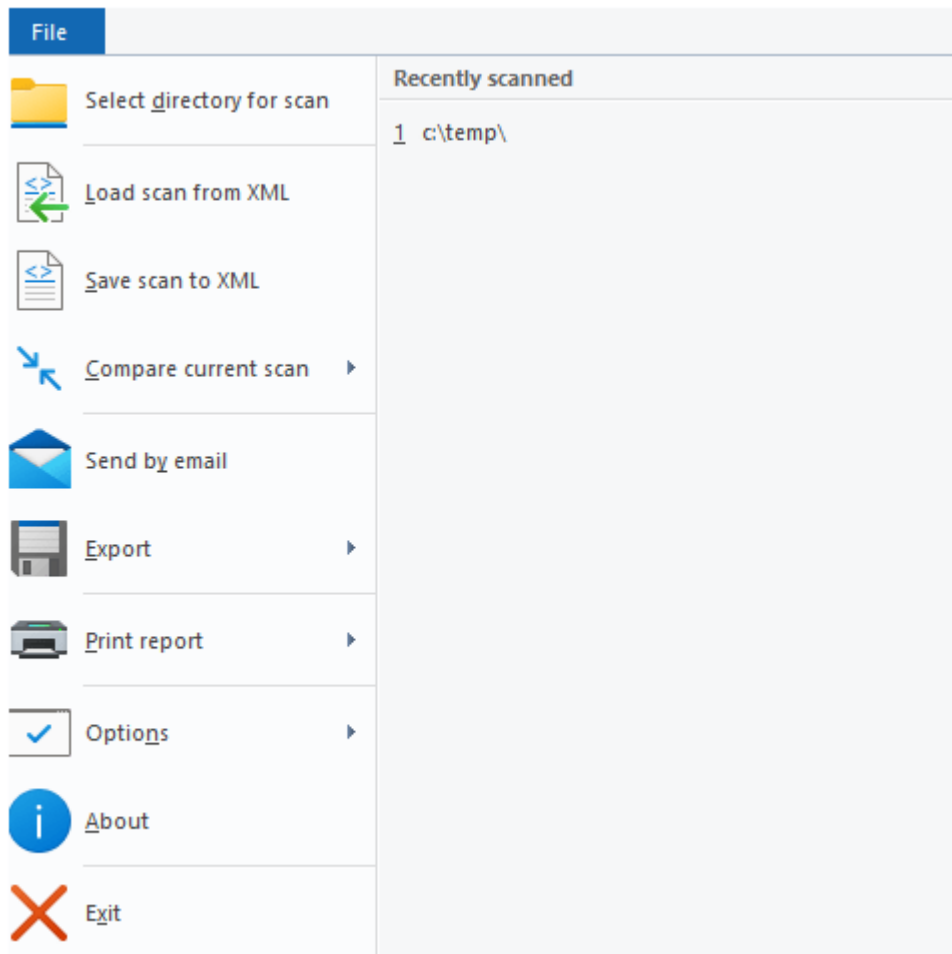

Recently Scanned	List of recently scanned paths and drives. Clicking a path will start a scan of this path.
Select directory for scan	Shows a dialog which lets you choose a target for scanning. When the selection has been confirmed, TreeSize starts scanning the selected path. You can also enter a path directly into the drive combo box in the toolbar.
Load scan from XML	Load a saved TreeSize scan from an XML file. That way you can view earlier results without performing a whole scan again.
Save scan to XML	Save the current scan to an XML file. This file can be loaded in TreeSize again or can be used to perform a comparison at a later time. Please note that the information about single files is not saved to the XML since this would increase the size of the XML files too much. Only the information about folders is included in the file. If you need reporting on file level, our software SpaceObServer may be useful for you.
Compare current	Compare the current scan against a previously saved scan (XML file) or a Snapshot ⁵³ (only supported for local NTFS drives). After comparison, folders unchanged in size will show up with a size of

scan	0 while folders that have grown will have values greater than 0 and will be displayed in red color. Folders that became smaller compared to the loaded report will have negative values and will be displayed in green color.
Send by Email	Send the Directory Tree ^[27] (left pane) via email.
Export	Export the Directory Tree, chart or list content to a file. See chapter Export submenu ^[12] .
Print report	Print the Directory Tree, chart or list content. See chapter Print submenu ^[13] .
Options	Open the options dialog of TreeSize. The submenu also contains commands that allow you to import/export and reset the current options.
About	Show version number and contact information.
Exit	Closes TreeSize.

6.1.1.1 Export Submenu

The menu items in the export submenu allow you to export the collected scan data in several different ways. You can customize the kind of data (columns) that will be exported as well as other export options using the [options dialog](#)^[60] of TreeSize. You can also choose whether only those folders currently visible (expanded) in the [Directory Tree](#)^[27] or all folders will be exported. Please use the [Expand](#)^[18] button on the [Home](#)^[15] or [Scan](#)^[17] tab (or in the context menu of the Directory Tree) to expand and collapse or expand folders to a certain level.

Plain text	Export the Directory Tree to a tab-separated text file. To configure the behavior for text exports, go to Options -> Text ^[89] .
CSV file	Export the Directory Tree to a CSV file (comma separated values). To configure the behavior for CSV exports, go to Options -> CSV ^[86] .
Excel file	Export the Directory Tree to a Microsoft Excel file. Supported formats are the conventional .XLSX file format (introduced with Excel 2007) as well as the former used .XLS (Excel 97-2003). Paths are exported as clickable hyperlinks. This allows you to quickly jump to the appropriate path in the Windows Explorer. To configure the behavior for Excel exports and the charts ^[30] that should be included, go to Options -> Excel ^[81] .

HTML file	Enables you to save a report as an HTML file which can be viewed with any HTML browser later. HTML files are easier to read than text files and don't require a special application like MS Excel. The HTML file will be UTF8-encoded and thus includes Unicode characters. To configure the behavior for HTML exports and the charts ^[30] that should be included, go to Options -> HTML ^[84] . There you can also define a custom CSS stylesheet that will be used for the HTML export.
PDF file	Enables you to save a report as an PDF file which can be viewed with any PDF Viewer later. PDF files are easier to read than text files and only require a free PDF viewer, which is included in Windows 8 and later. To configure the behavior for PDF exports and the charts ^[30] that should be included, go to Options -> PDF ^[80] .
Copy to clipboard	Copy the Directory Tree to clipboard in text format.
Copy list of files	Copy a list of all files in the current folder (and its sub-folders) to the clipboard. You can paste this list to your favorite spreadsheet or word processor. The settings for the text export ^[89] in the options dialog determine which columns will be included in the list.
Set export title	Allows you to set a title, which will be included with the header of an export or print. The default title includes the path of the scanned folder and the volume name of the drive the folder resides in. The use of environment variables is allowed.

6.1.1.2 Print Submenu

TreeSize offers a wide variety of flexible printing functions. You may, for example, print the content of the Directory Tree, the contents of a selected folder or any available chart ([Charts](#)^[30] view, [History](#)^[49] view, etc.).

The following commands are available in the "Printer" submenu:

Print report	Print report for the currently selected scan without preview.
Print with preview	Shows a print preview for the report of the currently selected scan.
Print right pane	Print the chart ^[30] or list currently shown the right pane of the window.
Set export title	Allows you to set a title, which will be included with the header of an export or print. The default title includes the path of the scanned folder and the volume name of

	the drive the folder resides in. The use of environment variables is allowed.
Page setup	Change page layout settings.
Print setup	Change printer settings.
Customize report	Customize exported columns, included charts ³⁰ , etc.

6.1.2 Quick Access Toolbar


The Quick Access Toolbar is a customizable toolbar containing a set of commands that are independent of the currently displayed tab. You can move the Quick Access Toolbar to one of the two possible locations, and you can add buttons representing commands to the Quick Access Toolbar.

Move the Quick Access Toolbar

The Quick Access Toolbar can be located in one of two places:

- Upper-left corner, next to the TreeSize icon.
- Below the Ribbon bar.

To switch the Quick Access Toolbar between those positions, click the small drop-down arrow and select "Show below the Ribbon" respectively "Show above the Ribbon".

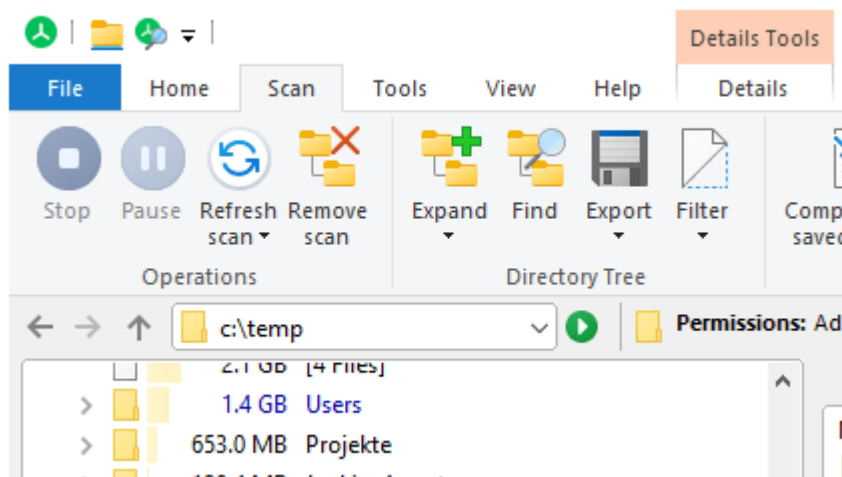


Add a command to the Quick Access Toolbar

You can add any command displayed in TreeSize to the Quick Access Toolbar.

1. On the Ribbon, click on the appropriate tab or group to display the command that you want to add to the Quick Access Toolbar.

2. Right-click the command, and then click "Add to Quick Access Toolbar" on the shortcut menu.

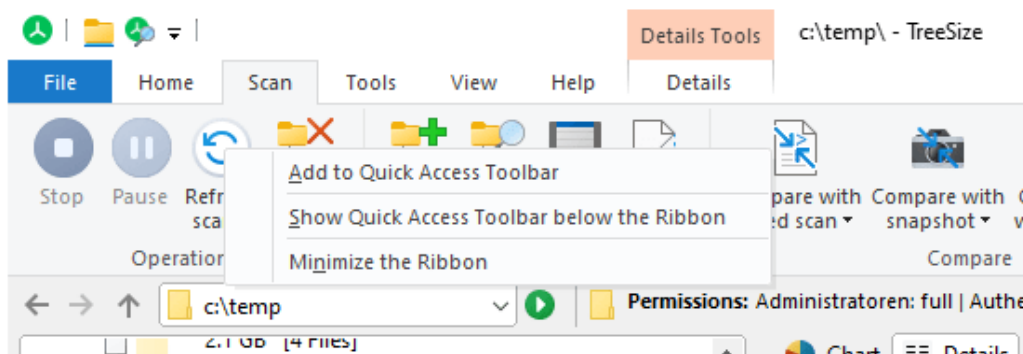


Note

- You cannot split the Quick Access Toolbar to multiple lines.

6.1.3 Home Tab

The ribbon tab **Home** contains the most commonly used actions and elements of TreeSize.



Select directory for scan

Opens a dialog enabling you to select a target for scanning. This dialog allows to configure complex scan targets with just a few clicks. TreeSize will start scanning the selected path once the selection has been confirmed. You can also enter a path directly into the drive combo box in the toolbar.

Stop

Stops the currently selected scan. This will abort the current scan process but not remove it from the [Directory Tree](#)²⁷.

The Stop button also offers a drop-down menu with more options:

- **Stop:** Stops the currently selected scan, even if it is already paused.
- **Pause:** Pauses the currently selected scan, without aborting or stopping it. You can resume a paused scan later.
- **Resume:** Resumes the currently selected paused scan.

Refresh

Refreshes the currently selected scan. The Refresh button also offers a drop-down menu providing access to more specific options:

- **Refresh all scans:** Using this option will trigger a full refresh for all scans of TreeSize.


- **Refresh selected folder:** With this option, you can refresh the currently selected folder only.
- **Watch for file system changes:** If you enable this option, TreeSize will keep track of the Windows change notifications and update the size information as well as several other information automatically. If you don't want the size information to change after the scan has finished, you should turn off "Automatic Updates". This option can be enabled or disabled for individual scans.

Remove scan	Removes the currently selected scan from the TreeSize window.
Size	Shows the size of files and folders.
Allocated space	Shows occupied disk space on the hard disk.
Number of files	Shows the number of files in the selected folders.
Percent	Shows how much percent of the parent folder each folder occupies.
Auto	If this option is activated, TreeSize will automatically select the most appropriate size unit. Other units are available via the drop-down element (small arrow).
GB	Show size values in gigabyte (GB).
MB	Show size values in megabyte (MB).
KB	Show size values in kilobyte (KB).
Expand	Using the "Expand" button, you can expand or collapse the Directory Tree ^[27] to a certain directory level. You can also use this menu to trigger a "Full expand" so that you will see any folder that is available in the current scan. More information on the "Expand" button can be found here ^[28] .
Send by email	Sends the Directory Tree ^[27] via email. This will create an email containing the contents of the directory tree using the current email settings. Emails can either be send using a MAPI client like Microsoft Outlook or via SMTP (recommended). Email settings ^[91] can be configured in the options dialog of TreeSize.

- Export** This button provides several different export options such as "**Excel**", "**Plain text**", or "**HTML file**". You can also copy the directory tree or the contents of the "**Details**" view to the **clipboard**. The drop-down menu enables you to **customize any export type**.
- Open TreeSize File Search** Start the **TreeSize File Search** with all available types of file search (largest files, oldest files, etc.) for the currently selected branch. For more information on the TreeSize File Search, see chapter [Using TreeSize File Search](#)^[97].
- Start as administrator** Restart TreeSize with administrator privileges. Please note: This button is available only if TreeSize was not started with administrator privileges.
- Options** Opens the options dialog for TreeSize. The drop-down button also provides access to the menu allowing **export/import and reset** of the application settings.

6.1.4 Scan Tab

The ribbon tab **Scan** contains all actions and elements related to the current scan.




- Stop** Stops the currently selected scan. When a scan is stopped, TreeSize will abort the current scan process but not remove it from the [Directory Tree](#)^[27].
- Pause/Resume** Pauses or resumes the currently selected scan. A paused scan can be resumed without scanning the already processed directories again.
- Refresh** Refreshes the currently selected scan. The Refresh button also offers a drop-down menu providing access to more specific options:
- **Refresh all scans:** Using this option will trigger a full refresh for all scans of TreeSize.
 - **Refresh selected folder:** With this option, you can refresh the currently selected folder only.
 - **Watch for file system changes:** If you enable this option, TreeSize will keep track of the Windows change notifications and update the size information as well as several other information automatically. If you don't want the size information to change after the

	scan has finished, you should turn off "Automatic Updates". This option can be enabled or disabled for individual scans.
Remove scan	Removes the currently selected scan from the TreeSize window.
Expand	Using the "Expand" button, you can expand or collapse the Directory Tree ^[27] to a certain directory level. You can also use this menu to trigger a "Full expand" so that you will see any folder that is available in the current scan. You can also use this menu to show only folders exceeding a certain size value.
Find	Searches for a certain folder in the Directory Tree ^[27] .
Export	Export the Directory Tree, chart or list content to a file. See chapter Export submenu ^[12] .
Exclude	Allows to exclude selected files/folders from the scan. Elements can be excluded temporarily for the current scan only, or permanently.
Compare with saved scan	Loads a saved scan from an XML file and compares it with the current scan. The differences in size will be displayed as positive and negative values in the user interface.
Compare with snapshot	Selects a Snapshot ^[53] of a scanned drive to compare it with the current data. The differences in size will be displayed as positive and negative values in the user interface.
Compare with path	In rare cases it can be useful to compare the current scan with another path, e.g. in case that the other path is a copy or a backup of the currently displayed path. After choosing the other path using a directory picker dialog, the differences in size will be displayed as positive and negative values in the user interface.
Show size changes	Show size changes instead of current values in the Directory Tree. This view option can be toggled if the current scan was compared with an XML report or snapshot.
Schedule this scan	Creates a scheduled Windows task ^[149] for the currently active scan. This is supported in the Professional edition only.

6.1.5 Tools Tab

On the **Tools** tab, you will find several useful TreeSize- and Windows-specific functions.



Options

Opens the options dialog for TreeSize. The drop-down button also provides access to the menu items facilitating the **export/import** and **reset** of the application settings.

Open TreeSize File Search

Starts the **TreeSize File Search** with all available types of file search (largest files, oldest files, etc.) for the currently selected branch. For more information about the TreeSize File Search, please refer to chapter [Using TreeSize File Search](#)⁹⁷.

Manage scheduled scans

Shows all **scheduled tasks** of TreeSize. Tasks can be customized here.

Create snapshot

Creates a new [Snapshot](#)⁵³ for this system. Snapshots can be used at a later time to **analyze size development** by comparing the data of the snapshot with that of a recent scan.

Create portable installation

Creates an installation of the Professional edition as a portable version, e.g. on a USB Stick. All of the settings will be saved to the specified installation directory.

Empty recycle bin

Deletes all items in the recycle bin to free up disk space.

Remove obsolete software

Opens the Windows Control Panel applet to uninstall software.

Configure Windows System Restore


Define how much space the Windows System Restore feature can use on your local hard drive.

Map network drive

Opens the Windows "Map Network Drive" dialog.

6.1.6 View Tab

The ribbon tab **View** contains all actions and elements influencing the general appearance of the application.



Select
active
View

Selects the view that is shown in the right panel of the application

Size

Shows the size of files and folders.

Allocated
space

Shows occupied disk space on the hard disk, aka "size on disk".

Number
of files

Show the number of files in folders.

Percent

Show how much percent of the parent folder each folder occupies.

Auto

If this option is activated, TreeSize will automatically select the most appropriate size unit.

TB

Show size values in terabyte (TB).

GB

Show size values in gigabyte (GB).

MB

Show size values in megabyte (MB).

KB

Show size values in kilobyte (KB).

B

Show size values in byte (B).

Decimals

Sets the number of decimals shown in displayed values.

Sort by
size

Sort items by size (descending order).


Sort by
name

Sort items in alphabetical order.

Group scans	Groups all scans in the Directory Tree ^[27] to receive the total results for all scans. See also " Group scans in the Directory Tree " ^[29] .
Show size changes	Shows size changes instead of current values in the Directory Tree ^[27] . This view option can only be toggled if the current scan was compared with an XML report or snapshot. See also " Size comparison " ^[54] .
Drive list	Show or hide Drive List ^[51] .
Scan overview	Show or hide scan overview toolbar (provides information such as total size and number of files and folders for the currently selected scan). Right clicking on the overview allows you to define whether it should wrap around or truncate the shown information in case it does not fit.
Status bar	Show or hide status bar (provides information on active scan filters and or errors that occurred during scan process).
Hide empty folders	If activated, all folders with zero files will be hidden. This is particularly useful if there a lot of such folders because a filter is applied.
Hide elements smaller than	If activated elements smaller than the specified size will be hidden.

6.1.7 Help Tab


The ribbon tab **Help** provides common help features, version information, and management functions for your product license.



Show help	Open the product manual of TreeSize.
Show PDF manual	Open the product manual as PDF (optimized for printing).
Frequently Asked Questions	Shows the Frequently Asked Questions (FAQ).
Feature Voting	Open the Feature Voting Platform of TreeSize in the browser. You are missing a functionality? Then this is the place to go to propose your idea or vote for the ideas of other users.

About	Shows version number and contact information.
Check for update	Checks if a newer version of this software is available.
What is new?	Shows recent changes.
Change installation key	Changes the installation key of the software.
Extend maintenance	Extends the maintenance period. Updates and support are free within the selected maintenance period.


Please note: For the trial version of TreeSize, the Ribbon group "License" contains different controls:

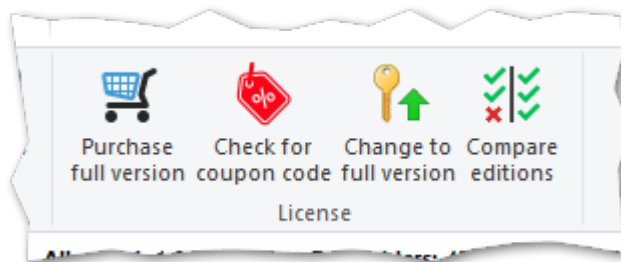

Purchase full version	Navigates to the JAM Software website and shows a list of all available license models.
Change to full version...	Helps you switch to the full version after purchasing the software.

6.2 Scan Targets

Originally TreeSize was designed to analyze file system paths. The current version enables users to scan targets not accessible via a file system path. Among them is every folder that appears in the left pane of the Windows Explorer. In this chapter we will describe all targets that can be scanned using TreeSize:

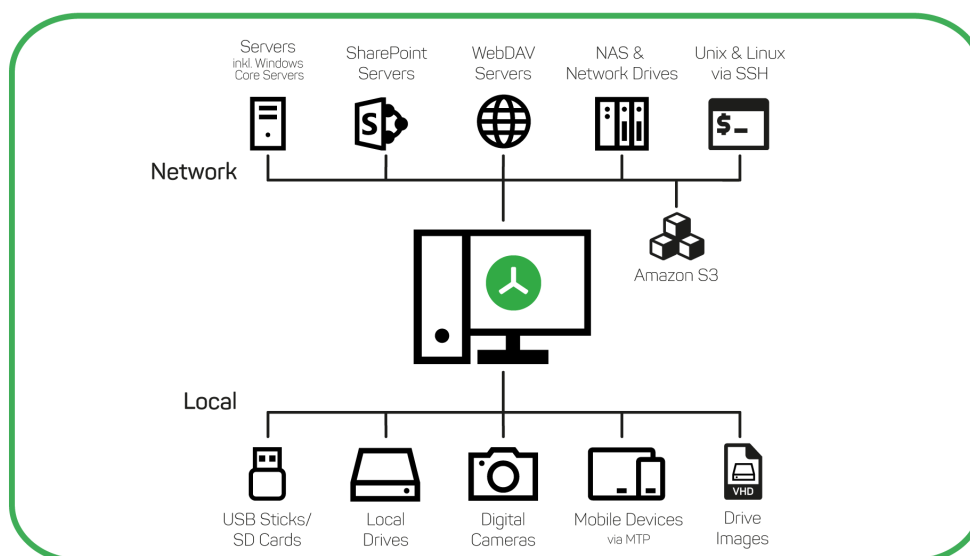

Local File System Paths

To scan a file system path, enter the path into the drive drop-down box on top of the [directory tree](#)^[27] or use the button "Select directory for scan" on the ribbon tab "[Home](#)"^[15]. You can also double-click on the drive in the [TreeSize drive list](#)^[51] on the bottom left corner of the window to start a scan.

Remote File System Paths

If a remote path is mapped to a drive letter, scan it just like a local drive (as described above). Additionally TreeSize supports UNC paths like `\servername\share`, which can be entered in the drop-down box on top of the [directory tree](#)^[27]. You can also select the remote path using the button "Select directory for scan" on the ribbon tab "[Home](#)"^[15] and browse to the path in the "Network" folder. To search your entire network, choose the "Network" folder here or use the path `*`.

UNC paths can also be added to the [drive list](#)^[51] using the right-click menu.

Mobile Devices and Smartphones

Mobile devices and smartphones can be scanned with TreeSize if they support the [MTP protocol](#). Those devices are typically listed under "This PC" in the Windows Explorer and in the dialog which appears when using the button "Select directory for scan" on the ribbon "[Home](#)"^[15]. TreeSize also support entering paths to mobile devices like this: `This PC\Galaxy Tab A` in the drop-down box on top of the [directory tree](#)^[27].

WebDAV Server

If the WebDAV server is listed under "This PC" in the Windows Explorer, you can use the button "Select directory for scan" on the ribbon "[Home](#)"^[15] to select this server for scanning. You can also enter the HTTP(S) server address into the dropdown box on top of the directory tree using this syntax:
`https://servername.com/path/.`

Linux/Unix Server via SSH

With TreeSize you can scan Linux or Unix server, even though they are not integrated into your Windows storage environment, using the SSH network protocol. You can enter address of server shares to scan via SSH into the dropdown box on top of the directory tree using this syntax:

```
ssh://servername/share.
```

Please note: TreeSize will request login information (user name and password) for the SSH connection. Alternatively, you can include these directly in the address: `ssh://user:password@servername/share`

Amazon S3 Cloud Storage

You can scan Amazon S3 cloud storage with TreeSize. To scan your entire S3 storage, simply type `s3://*` in the dropdown box on the top left and press enter. To scan a certain bucket use: `s3://Bucketname/`

TreeSize will ask for an access token and the corresponding secret access token with the option to save it for future use. You may also supply this information as part of the URL: `s3://Token:SecretToken@Bucketname/`

In the column "Description" the storage class of a file (e.g. reduced redundancy oder standard) will be shown.

SharePoint and SharePoint Online

With TreeSize you can scan local SharePoint servers (OnPremise) and SharePoint Online sites, either via [WebDAV](#)^[23] or using the SharePoint REST API. To scan a SharePoint site, simply enter the HTTP(S) server address into the dropdown box on top of the directory tree using this syntax: `https://servername.com/path/`.

To scan a complete SharePoint server with all associated site collections use the syntax `sharepoint://servername.com/path/`. TreeSize will then determine the actual protocol to use automatically (with a preference for HTTPS).

TreeSize will ask for the login information (user name and password) for a federated authentication or uses credentials contained with the URL, like `https://user:password@servername.com/path/`. TreeSize also supports multi-factor authentication if it is [registered with the Azure AD](#)^[56].

Container-Files: ZIP, VHD(X), and ISO


TreeSize also supports to scan container files using ZIP, VHD(X), or ISO file format. To start a scan of such a file, you may simply enter the path to it including the filename in the drop-down box on top of the [directory tree](#)^[27].

FTP Server

FTP support will be dropped in v8.3, please use SSH instead. Until then you can enter the FTP server address into the drop-down box on top of the directory tree using this syntax: `ftp://username@servername.com/path/`.

6.3 Select a scan target

This dialog assists configuring a new scan target for TreeSize. Even complex paths and URLs can be set up with just a few clicks.

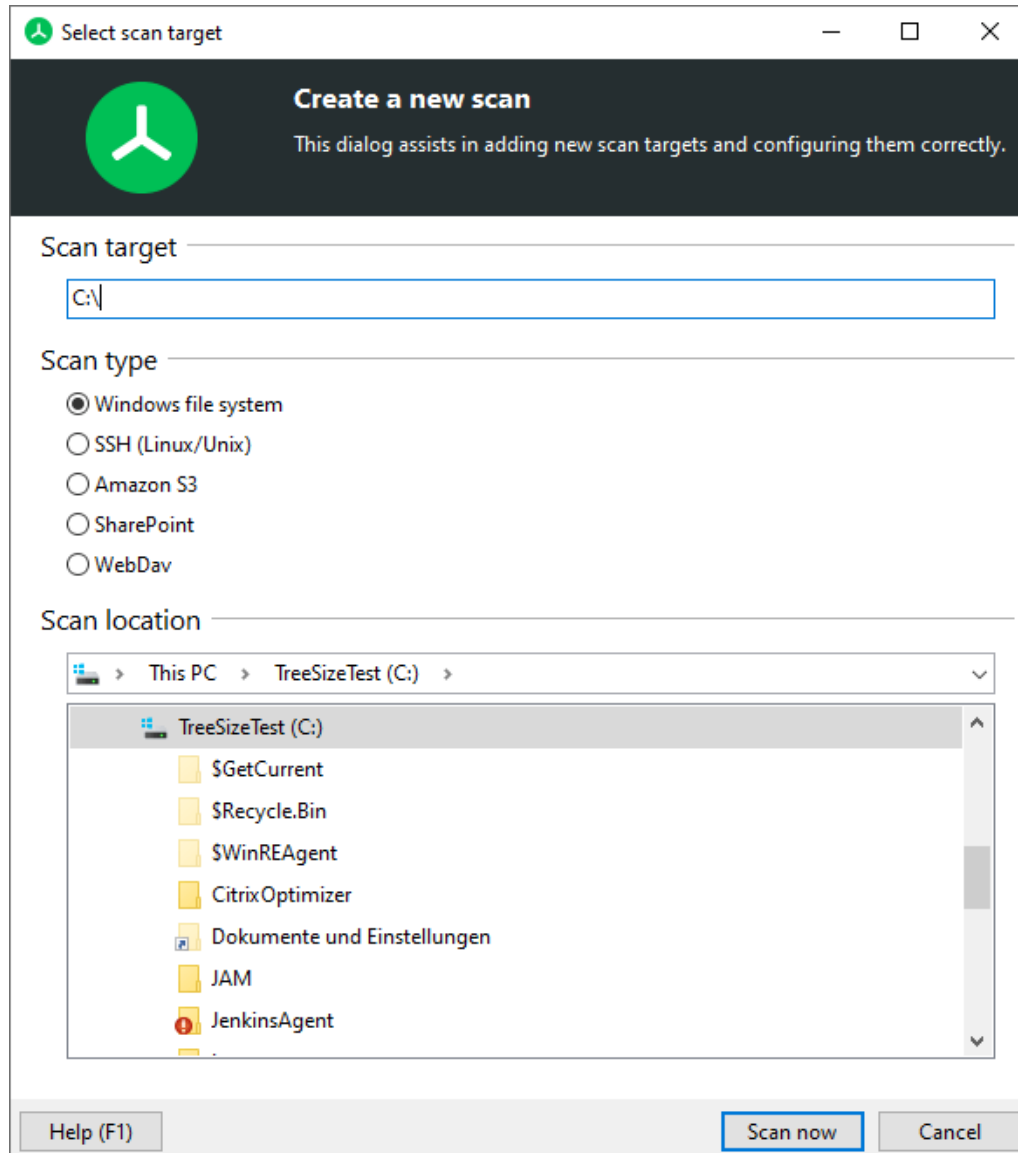

The dialog consists of three segments.

Scan target

You can enter the file system path or URL you intend to scan directly into the edit field here. This field uses and supports the same formats as the path edit field on the main form.

The other two segments of the dialog adjust automatically to the path entered here. Changes in the other two segments are reflected in this field as well in return.

Scan type

This section allows to select one of the [scan types TreeSize supports](#)^[22], and start with the configuration of a more complex target.

Windows file system	Scan a common Windows file system (Folder, Share) or a complete Windows Server.
SSH (Linux/Unix)	Scan a Linux or Unix file system using SSH.
Amazon S3	Scan an Amazon S3 Bucket.
SharePoint	Scan a SharePoint site.
WebDav	Scan a remote location using the WebDav protocol.

Scan location

The fields available in this section depend on the selected scan type. They allow to specify single aspects of the scan target in detail.

Windows file system	Use the breadcrumb bar and the file system tree to select the file system tree or server share you want to scan. You may also enter a complete machine/server name (e.g. "\\MyServer") to scan all available shares of this machine/server.
Server name (SSH, SharePoint, WebDav)	The name or IP of the server you want to scan.
Path (SSH, Amazon S3, SharePoint, WebDav)	The path you want to scan on the configured server or in the bucket.
User name (SSH, SharePoint)	The name of the user account in which context the scan should be executed. If you leave this field empty, TreeSize will ask for credentials when required or use previously persisted values. Values entered here are remembered for the current instance of TreeSize, but not persisted.
Password (SSH, SharePoint)	The password to authenticate the user. If you leave this field empty, TreeSize will ask for credentials when required or use previously persisted values. Values entered here are remembered for the current instance of TreeSize, but not persisted.
Bucket name (Amazon S3)	The name of the Amazon S3 Bucket you want to scan.
Access key (Amazon S3)	The access-token of the user to perform the scan as.
Secret access key (Amazon S3)	The secret access-token of this user.

Scan all SharePoint Site Collections (SharePoint) Allows to scan all site collections connected with the defined SharePoint site.

To scan the root directory of a server 'LinuxServer' via SSH as 'ServiceUser', the scan may be configured like this for example:

Select scan target

Create a new scan
This dialog assists in adding new scan targets and configuring them correctly.

Scan target

ssh://LinuxServer

Scan type

☐ Windows file system
☒ SSH (Linux/Unix)
☐ Amazon S3
☐ SharePoint
☐ WebDav

Scan location

Server name:
LinuxServer

Path:

User name:
serviceuser

Password:
.....

☐ Save these credentials for future usage


Help (F1) Scan now Cancel

6.4 The Directory Tree

The **Directory Tree** of TreeSize is a powerful tool for **visualizing the size** of files and folders. The gradient bar in the background serves as a size indicator, providing a quick and **intuitive overview**: you will see at a glance which folders occupy the most space on your disk. The Directory Tree can be browsed just like a folder tree in the Windows Explorer.

Contents

- [Notes](#)^[28]
- [Expand or collapse the Directory Tree](#)^[28]
- [Group scans in the Directory Tree](#)^[29]

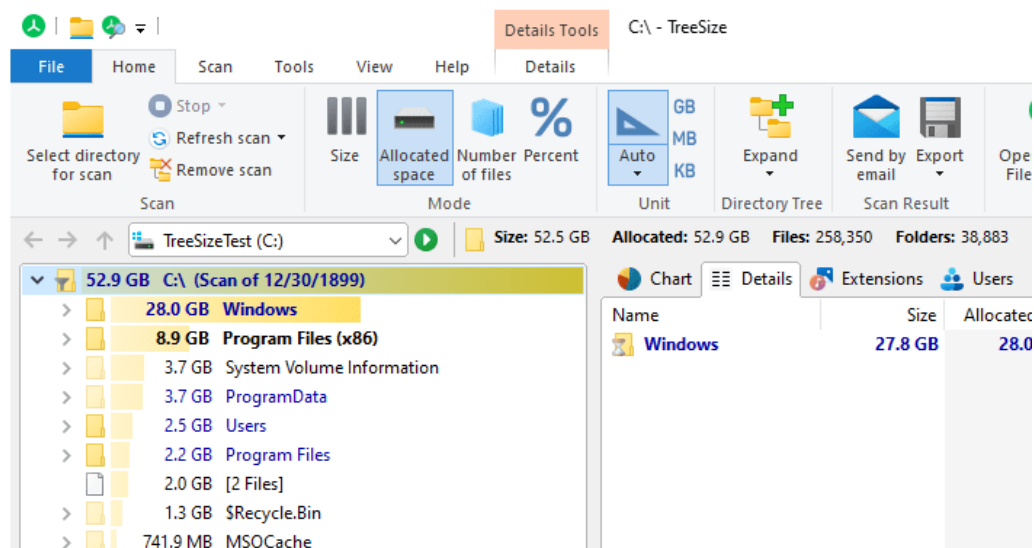


Notes

- If you place your mouse cursor on a folder, you'll be shown a tool tip with detailed information if the [corresponding option](#)^[72] is active.
- The Directory Tree supports an incremental search. To jump to a certain folder, simply type the initial characters of its name after clicking anywhere in the Directory Tree. The Search will then select the first matching folder.
- The [Find](#)^[18] dialog ([Scan](#)^[17] tab) provides a simple search function enabling you to search for certain folders in the Directory Tree.
- When you right-click on a folder or file in the tree to the left, TreeSize will display the Explorer context menu. Additionally, you will find the TreeSize submenu providing various additional options.
- Very large folders are marked in bold text. The threshold can be configured in the options dialog ([Options > View > General](#)^[66]).
- The color for the gradient bar can be configured in the options dialog ([Options > View > Directory Tree](#)^[70]).


Expand or collapse the Directory Tree

Using the **Expand submenu** (accessible via tabs [Home](#)^[15] and [Scan](#)^[62]) you can **expand/collapse and hide** certain folders in the tree, based on a certain directory level or an user-defined size value. For example, you can hide any file and folder occupying less than 500 MB (see screenshot below). This way, the **most relevant elements** will be shown in the tree while **unimportant information is hidden**.

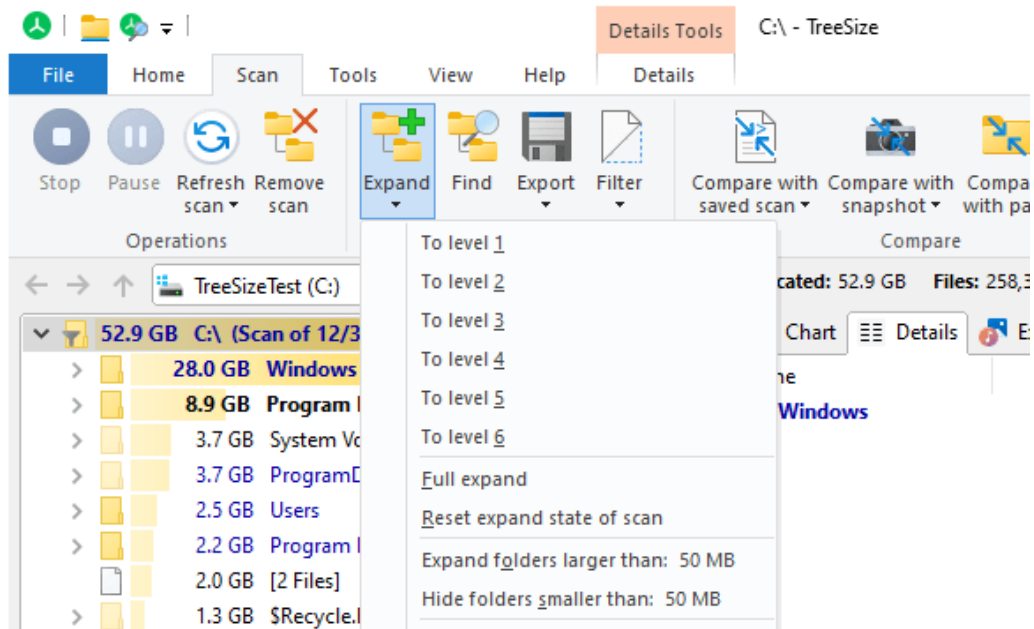

Group scans in the Directory Tree

With the "[Group scans](#)"^[21] button (available on the [View](#)^[20] tab or via the context menu), you can merge multiple scans into a single "virtual root". The virtual root shows a summary of all scans that are part of this group. This way you will gain total sizes and values for arbitrary scans.

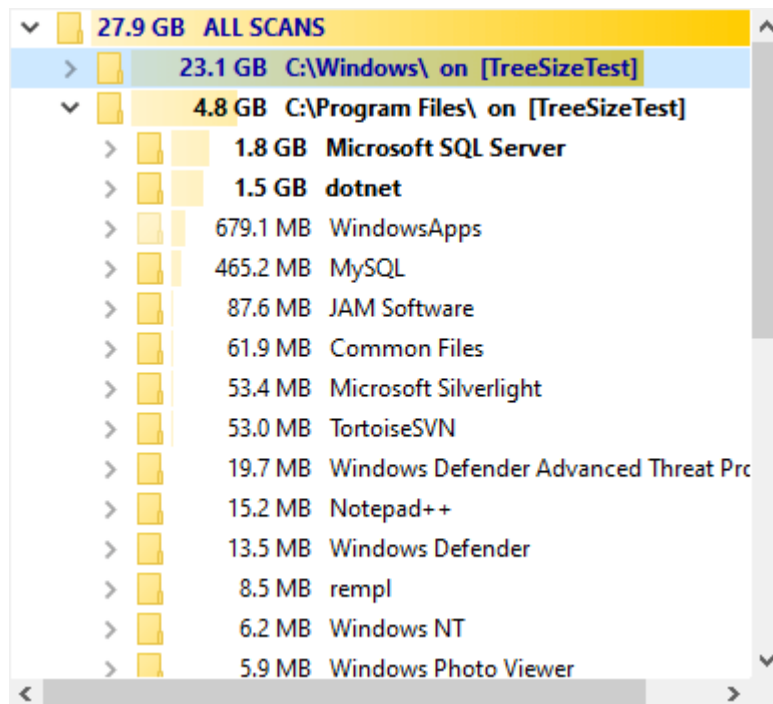

6.5 The TreeSize Views

The following viewing options are available in TreeSize:

- [Chart](#)^[30] Visualizes folder information in several different types of charts.
- [Details](#)^[36] Provides an Explorer-like list of files and folders contained in the currently selected item in the [Directory Tree](#)^[27].
- [Extensions](#)^[42] Shows information on size grouped by file types.
- [Users](#)^[43] Shows information on size grouped by users.
- [Age of Files](#)^[45] Shows the distribution of the age of scanned files, based on a certain date attribute.
- [Top Files](#)^[47] Lists the biggest files in the scanned branch in detailed view.
- [History](#)^[49] Visualizes the size development of the selected root folder.

6.5.1 Chart

TreeSize is able to **visualize folder information** in several different types of charts. The information is based on the currently active [view mode](#)^[20] of TreeSize. There are three basic types of charts, namely:

- [Pie Chart](#)^[32]
- [Bar Chart](#)^[34]


- [Treemap Chart](#) ³⁵

Context tab: Chart

Please note: a context tab will be activated when the Chart view is selected. It allows you to manipulate the charts in several ways, for example zooming, turning on or off the grid lines, switching between 2D and 3D mode, changing colors, etc. Using the tab, you can also copy the current chart to the clipboard or save it as a file.

More options to individualize the Charts are available with the [Options Dialog](#) ⁷⁵.

Some elements are available exclusively for certain types of charts (e.g. "Level of Details" for "treemap" charts only).



For all directory charts the following commands are commonly available:

Pie Chart	Switches to pie chart view.
Bar Chart	Switches to bar chart view.
Treemap Chart	Switches to hierarchical chart view.
Export chart	Saves the current chart as a graphic file.
Email	Export the current chart and send it via email. You can configure your email settings in options dialog.
Copy Chart to Clipboard	Copies the current chart to the clipboard (can be pasted in other applications).
Print right pane	Prints the current chart.
Color	Use the color picker to choose a color for the chart below: select a color, then click on the part of the pie the color should be applied to.
Show chart in 3D	View chart in 3D or 2D.
Zoom in	Zooms in on the chart.
Zoom out	Zooms out of the chart.

Zoom 100%	Resets zoom to 100%.
Dependent on the displayed chart type, there are additional options available:	
For pie charts:	
Show Free Space	Show the free space of a drive as additional slice.
For bar charts:	
Show Grid	Show or hide grid lines for this chart.
For the treemap chart:	
Level of detail	Change the detail level of the treemap chart.
Show Free Space	Show the free space of a drive as a separate tile.
Included Elements	<p>The treemap chart allows you to specify which elements should be included with the chart. The size of each tile represents the size of the according element (usually the summarized size of the contained files), just as for folders.</p> <p>Activating more than one type of elements to be included, a hierarchical structure will be implied: Each file belongs to an extension, each extension belongs to a file type group, and each group belongs to a folder.</p> <p>The legend of the chart will adapt to the selected elements.</p> <p>There are several options available:</p>
Show single files	Include a separate tile for each file.
Show extensions	Include a separate tile for each extension contained within a folder.
Show file type groups	Include a separate tile for each file type group ^[72] contained within a folder.

Context Menu

Right-clicking on any chart shows a popup menu offering additional features, such as opening the corresponding item in the Windows Explorer.

Pie Chart


The Pie Chart shows the relative portions of each subfolder of the currently selected item in the [Directory Tree](#)^[27].

The diagram contains the name of each folder, its size (or allocated space, or number of files; for more information please see [view modes](#)^[20]), and its percentage value. Small folders may be summarized in a slice named "Other".


If a root of any drive is displayed in a pie chart and you have switched to the "Allocated Space" mode, the free space of this drive will also be displayed as one slice of the pie. This behaviour can be switched on or off in the options menu. The pie chart shows the free space as one slice among the others and calculates the percentage appropriately (relatively to the others), so the percent value might differ from the "% Free" value of the drive if TreeSize didn't see all files.

Hovering over a slice will show detailed information about the corresponding folder, double clicking will change into the selected folder.

Double-clicking on a slice will show the pie chart view for the selected folder. In case the clicked slice represents a file, it would be executed. Right click a slice in order to perform file operations like delete, copy, paste, properties etc. To manage several folders at once hold the shift key while selecting the desired segments in chart.

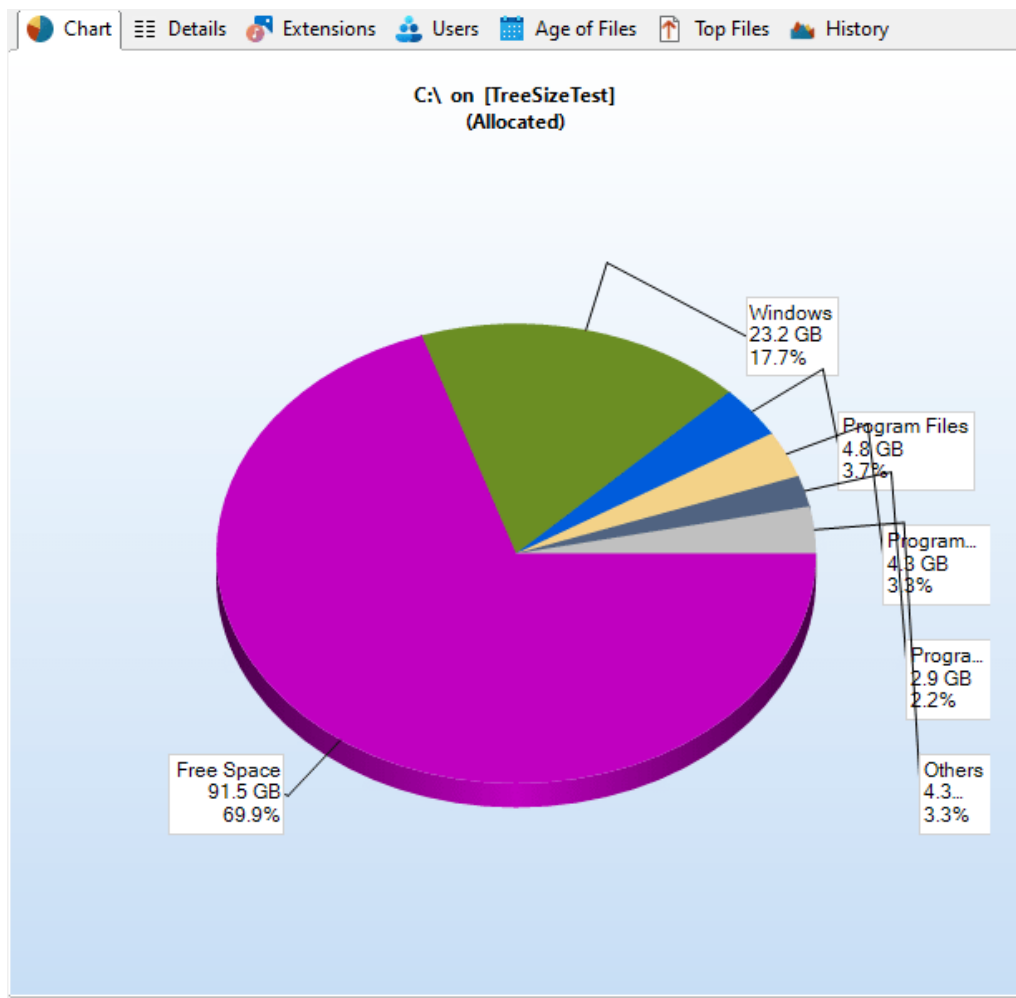


Please note that the Pie Chart not only visualizes the sizes of each subfolder of the currently selected item in the Directory Tree, but also the distribution of **file extensions** and even the file and directory owners (**user statistics**). To change the type of the Pie Chart, please click on the drop-down arrow right beside the caption of the Ribbon button (see image below).

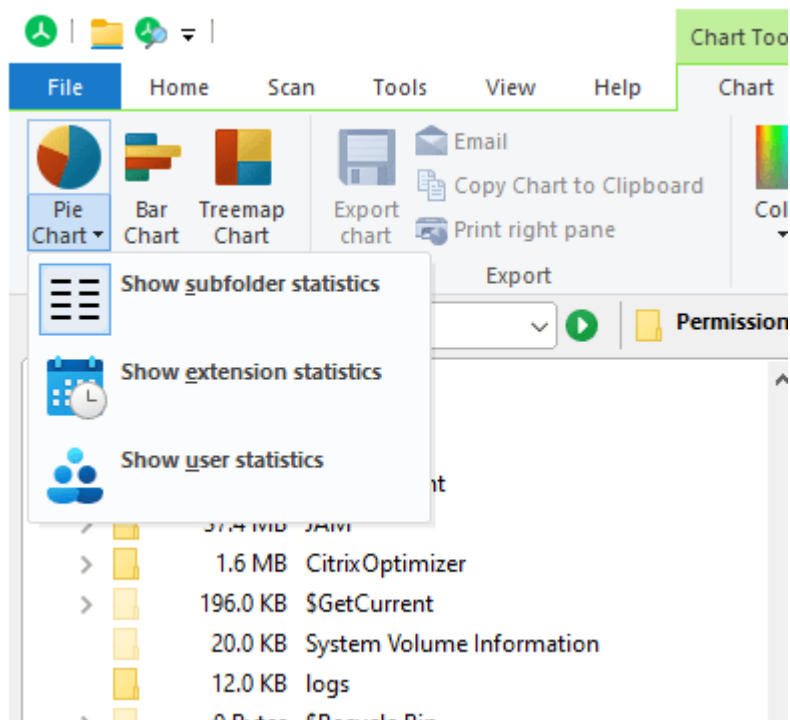

Bar Chart

The Bar Chart visualizes folder sizes in form of horizontal bars. Grid lines in the background of the chart allow for easy determination of folder sizes and comparison of each folder in relation to other folders on the same directory level. As with the pie chart, hovering over a bar will call up more detailed information about the corresponding folder. Double-clicking on a bar will show the bar chart view for the selected folder.

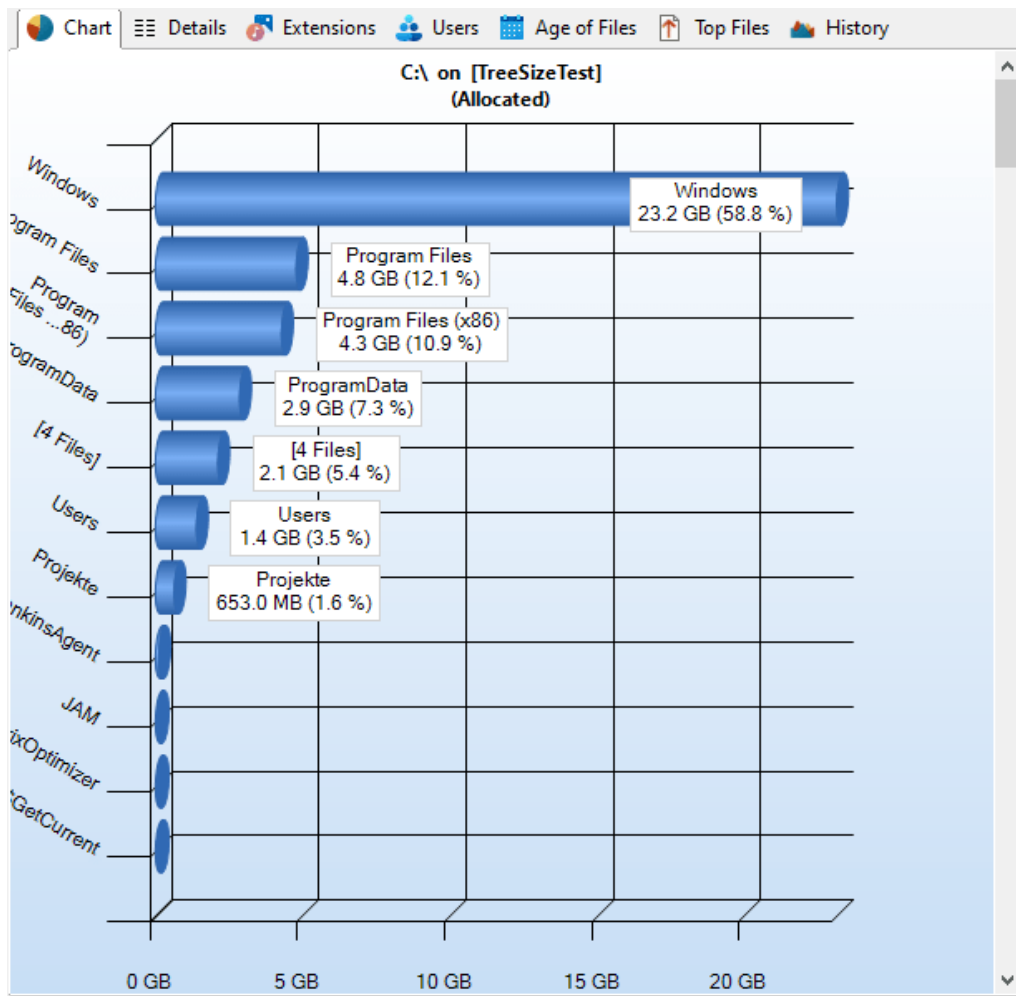

Treemap Chart


The treemap chart is a hierarchical chart that is able to visualize the sizes of each subfolder (not only direct child folders) of a selected directory branch.

Each folder is shown as a rectangle. The area of the rectangle represents the size of the corresponding folder. The rectangles of subfolders are located inside the rectangle of their parent folder. If a folder has no subfolders and the [file extensions](#)^[42] statistics was activated during the scan, the file types are now shown as subitems.

The color of the rectangle face indicates the directory level. The colors range from a darker blue (top level directories) to a lighter blue (directories with a deep file system level). These colors can be adjusted using the [color picker](#)^[31] in the context tab. The context menu of the treemap chart also allows you to apply a predefined color scheme. The shown rectangles must have a minimum size to be displayed. You can customize this minimum value using the [Level of Detail](#)^[32] track bar in the context tab. If this value is small, the chart might look very complex and confusing.

If you place the mouse cursor over the chart, you will see a tooltip containing information about the directory the cursor hovers over. Double-clicking on one

of the rectangles will navigate to the corresponding directory in the [Directory Tree](#)^[27]. Drag and drop operations are supported in the treemap chart.

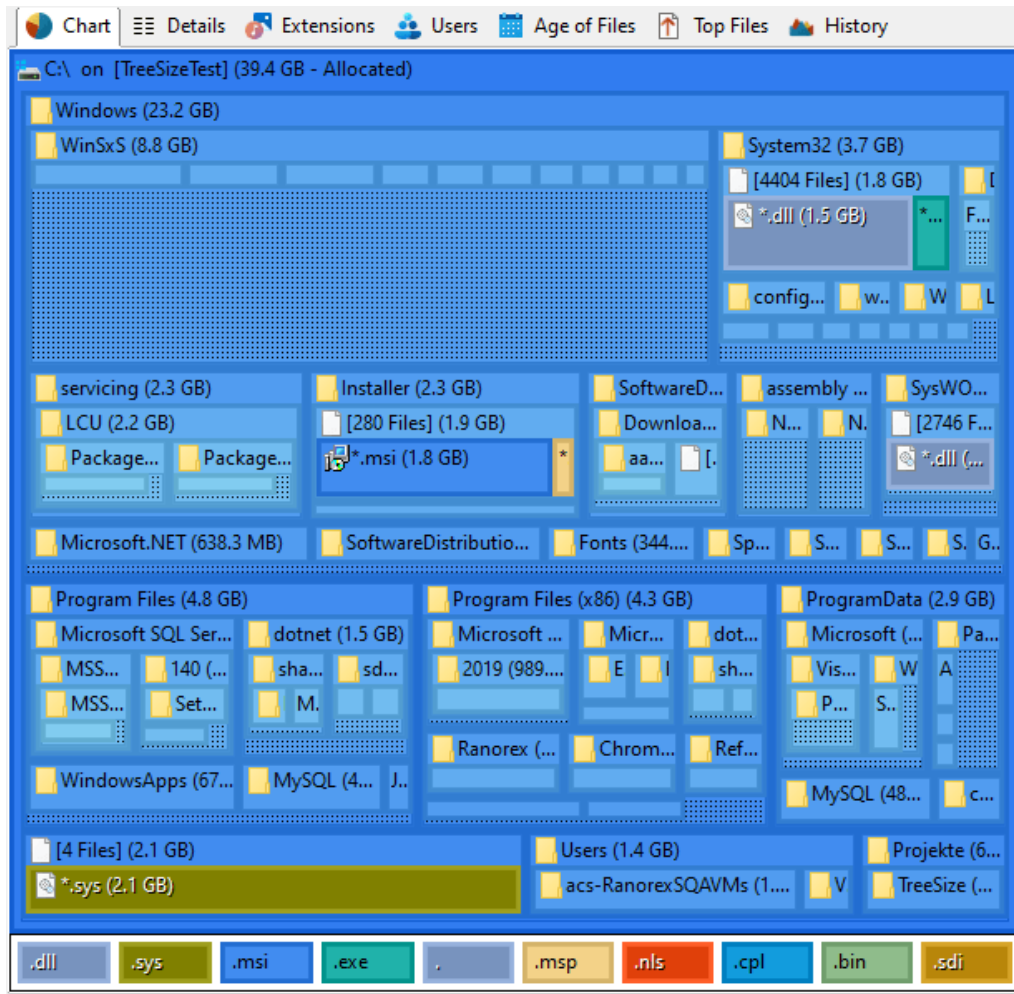

6.5.2 Details

The **Details** provides an Explorer-like list of files and folders that are contained in the current selected item in the [Directory Tree](#)^[27].


Name	Size	Allocated	Files	Folders	% of Parent ...	Last Modified
Windows	24.1 GB	23.2 GB	289,4...	103,2...	58.8 %	2/28/2022
Program Files	4.7 GB	4.8 GB	21,229	2,835	12.1 %	2/28/2022
Program Files (x86)	4.6 GB	4.3 GB	16,667	2,023	10.9 %	2/28/2022
ProgramData	2.9 GB	2.9 GB	2,819	994	7.3 %	2/28/2022
pagefile.sys	1.9 GB	1.9 GB	1	0	4.8 %	2/28/2022
Users	1.4 GB	1.4 GB	5,734	3,688	3.5 %	2/28/2022
Projekte	633.3 MB	653.0 MB	9,728	1,549	1.6 %	2/28/2022
swapfile.sys	256.0 MB	256.0 MB	1	0	0.6 %	2/28/2022
JenkinsAgent	120.0 MB	120.4 MB	350	83	0.3 %	2/28/2022
JAM	36.6 MB	37.4 MB	473	173	0.1 %	9/14/2021
CitrixOptimizer	1.5 MB	1.6 MB	29	9	0.0 %	1/20/2021
\$GetCurrent	188.3 KB	196.0 KB	8	2	0.0 %	1/20/2021
System Volume Info...	20.1 KB	20.0 KB	5	0	0.0 %	4/9/2019
logs	7.7 KB	12.0 KB	2	0	0.0 %	9/14/2021
backup-path.txt	1.4 KB	4.0 KB	1	0	0.0 %	6/23/2021
\$Recycle.Bin	516 Bytes	0 Bytes	4	4	0.0 %	8/6/2021
\$WinREAgent	0 Bytes	0 Bytes	0	1	0.0 %	9/14/2021
Dokumente und Ein...	0 Bytes	0 Bytes	0	0	0.0 %	4/27/2018
mount_temp.bat	131 Bytes	0 Bytes	1	0	0.0 %	4/9/2019
Programme	0 Bytes	0 Bytes	0	0	0.0 %	4/27/2018
Recovery	0 Bytes	0 Bytes	0	1	0.0 %	1/20/2021
temp	0 Bytes	0 Bytes	0	2	0.0 %	2/28/2022

More Columns

Detailed information on each file or folder can be shown by selecting the desired **attribute** in the column list, available by **right-clicking the header** of the list or via the [Details page](#)^[69] in the options dialog of TreeSize. Individual file types, users or Age of files intervals can be added as columns as well. To do so, right click on the extensions, user, or interval and select "Add column ... to Details". These columns will be exported as well, if in the [Options](#)^[81] the checkbox "Use same columns as in Details view" is checked.

Context tab: Details

Like every view in TreeSize, the Details view comes with a Ribbon tab that is activated when the the list is clicked. The Ribbon tab provides commonly used list functions such as select operations or export features.



The following commands are available on the "Details" tab:

Delete	Deletes the selected items. Hold the "Shift" key to remove the item(s) from the disk permanently (Please note: You cannot recover files that have been removed permanently!).
Properties	Shows the properties for the selected item.
Move/Copy	Opens a dialog for the execution of file operations. The dialog allows to move the selected items to another location. It also provides functionalities to archive, copy, or delete them, using a variety of additional options, such as the creation of a log file of the operation.
Bulk Rename	Opens a dialog that allows to rename multiple files ¹³⁵ at the same time.
Export Details	Exports the contents of the "Details" view to a file. If two or more items are selected, only the selected items will be exported. Available file formats are "Text Files (.txt)", "HTML Files (.htm)", "Rich Text Format (.rtf)", "Microsoft Excel (.xlsx)", and "Comma Separated Values (.csv)".
Email	Sends the content of the "Details" view via email.
Copy Clipboard	Exports the contents of the "Details" view to the clipboard. If two or more items are selected, only the selected items will be exported.
Print pane	Prints the selected items of the "Details" list.
Select all	Selects all items in the list.
Select none	Unselects the list items.
Invert selection	Inverts the selection.
Open command prompt	Opens command prompt at the current directory of the "Details" view.
Open Windows Explorer	Opens Windows Explorer and shows the parent folder of the currently selected items in the "Details" view.
Compress	Compresses this file or folder using NTFS compression.
Decompress	Turns off NTFS compression for this file or folder.
Copy path	Copies the path of the selected items to the clipboard.

Preview pane Enables or disables the preview pane, which shows the content of the selected file in the "Details" list.

Context Menu on the Details view

The list on the Details view shows the Windows Explorer context menu when you right-click on an item. An additional submenu labeled TreeSize is included which shows all information that is available about the selected item including the columns that are currently not activated. This submenu may also be used to activate or deactivate columns (for a description of available columns, see [here](#))^[39].

6.5.2.1 Available Columns

These are the available columns that can be configured individually for the [Details](#)^[36] view and any export type (Excel, HTML, etc.) using the [Options](#)^[60] dialog of TreeSize.

Column name	Description
Name	The name of the file or folder.
Full Path	The full path, including the object's name.
Size	The size of the object.
Allocated	The space that the object currently occupies on disk (see also: Wasted Space ^[181] and NTFS Compression ^[178]).
Files	The number of files in a directory branch.
Folders	The number of sub-folders in a directory branch.
Growth	The absolute size difference (e.g. in MB) of this element. Only available if the scan was compared with a saved scan or snapshot. Please refer to the topic " Directory Tree ^[27] > Compare scans ^[54] " for more information. The value in this column depends on the selected view mode and unit (see tabs Home ^[15] and View ^[20]).
% Growth	The relative size difference of this element
% of Parent	The amount of space in percent that a folder or file occupies relative to its parent folder.
Last Modified	The last modification date of the object. TreeSize calculates the last modified and last access date more precisely than the Windows Explorer, because it takes all files in all sub-folders into account. So the values shown in the Windows Explorer may differ. This behavior can be changed in the options ^[60] dialog, under "Scan > General > Folder date calculation" (Expert mode).
Last Access	The last access date of the object.

Compr.	The size in percent by which an object has been compressed using the built in compression of the file system (see also: Notes on NTFS ^[178]).
Owner	The name of the user that is assigned as owner of the folder or file in the filesystem.
Optical size	media The amount of space that an object would occupy on an optical medium such as a CD or DVD with ISO file system.
Current Date	The current date. This column can be useful if you want to process the collected data, e.g. in a database.
Attributes	The file attributes Readonly (R), Hidden (H), System (S), Directory (D), Archive (A), Compressed (C), Sparse (Q since Windows 10, P on older Windows versions), Temporary (T), Offline (O), Reparse Point (L) Encrypted (E), Pinned (P - only available on Windows 10 or later), Unpinned (U), Recall on data access (M), and Alternate Data Streams (Z).
Type	The file type, e.g. "Text file".
Dir Level	The level of an object in the file system.
Dir (Relative)	Level The level of an object in the file system in relation to the path that was used as starting point for the scan.
Creation Date	The date at which the object has been created.
Containing Path	The full path to the current object, not containing the object's name.
Cost (Allocated)	You can define costs for the occupied space in the options ^[66] dialog. The costs for the files and directories, based on their allocated space, are shown in this column.
Avg. File Size	The average size of a file in a folder.
Permissions	<p>The access permissions of the object in the UNIX-like format: Username1: +/-R +/-W +/-X Username2: ... where "+" means the right is granted and "-" means that the right is denied. "R" stands for read access and "W" for write access. For files "X" means the right to execute, for directories the right to list the directory content.</p> <p>TreeSize maps the actual permissions to a very compact presentation: Multiple access control elements for one user are merged to one, and most special permission are not displayed.</p> <p>Please note: <i>You want to get notified if the permissions of certain important folders change? This can be done using our monitoring tool "Server Sentinel". The file system sensor allows you to monitor specific file system events, send automatic notifications, and react to them accordingly.</i></p>

Inherited Permissions	These are the permissions inherited from the parent directories.
Own Permissions	These are the own permissions defined specifically for this file system object.
File Version	The version number that is included in EXE, DLL OCX and similar binary files.
Author	This column shows the author information that is extracted from the meta data of the file, taken from MS Office and compatible files.
Last Save Date	This column shows the date on which the file was saved the last time, taken from MS Office and compatible files. This information is extracted from the meta data of the file.
Hardlinks	The number of hardlinks ^[180] to a file. Empty in case of folders.
Error	In case a folders could not be scanned, this column will contain the message of the error that occurred.
Full User Name	Shows the full user name of the owner of that file or folder.
Link Target	Shows the target path of a link.
MD5 Checksum	Shows a string representation of the MD5 checksum for this file's content.
SHA256 Checksum	Shows a string representation of the SHA256 checksum for this file's content.
Extension	The extension of the file, e.g. ".txt" for a text file.
Path Length	Shows the number of characters included in the full path of this file or folder.
Alternate Data Streams	Shows the size hold by " Alternate Data Streams " ^[179] for this file (not available for directories).
Space Free	Shows the amount of space that is available on the current drive.
Description	For folders and shares this column shows the comment associated with them. For office files and pictures their embedded title is shown. In case non of this data is available, but the folder's or file's name is an SID (like in the "\$Recycle.Bin" folder), this SID is resolved to a username in this column.


More Columns:

In addition to the predefined columns that are mentioned above, TreeSize supports all columns that can be selected in Windows Explorer. The selection dialog provides a large number of additional meta data, such as the number of pages in an office document, the width and height of image files, or the artist for MP3 files.

The TreeSize [File Search](#)^[126] allows to search for files that contain any arbitrary value of the available meta data.

6.5.3 Extensions

The **Extensions** view shows information on size grouped by file types, thus granting an overview of the types of files that use up most of the disk space. Statistics on file extensions can be activated and deactivated in the [Options](#) ⁶² dialog.

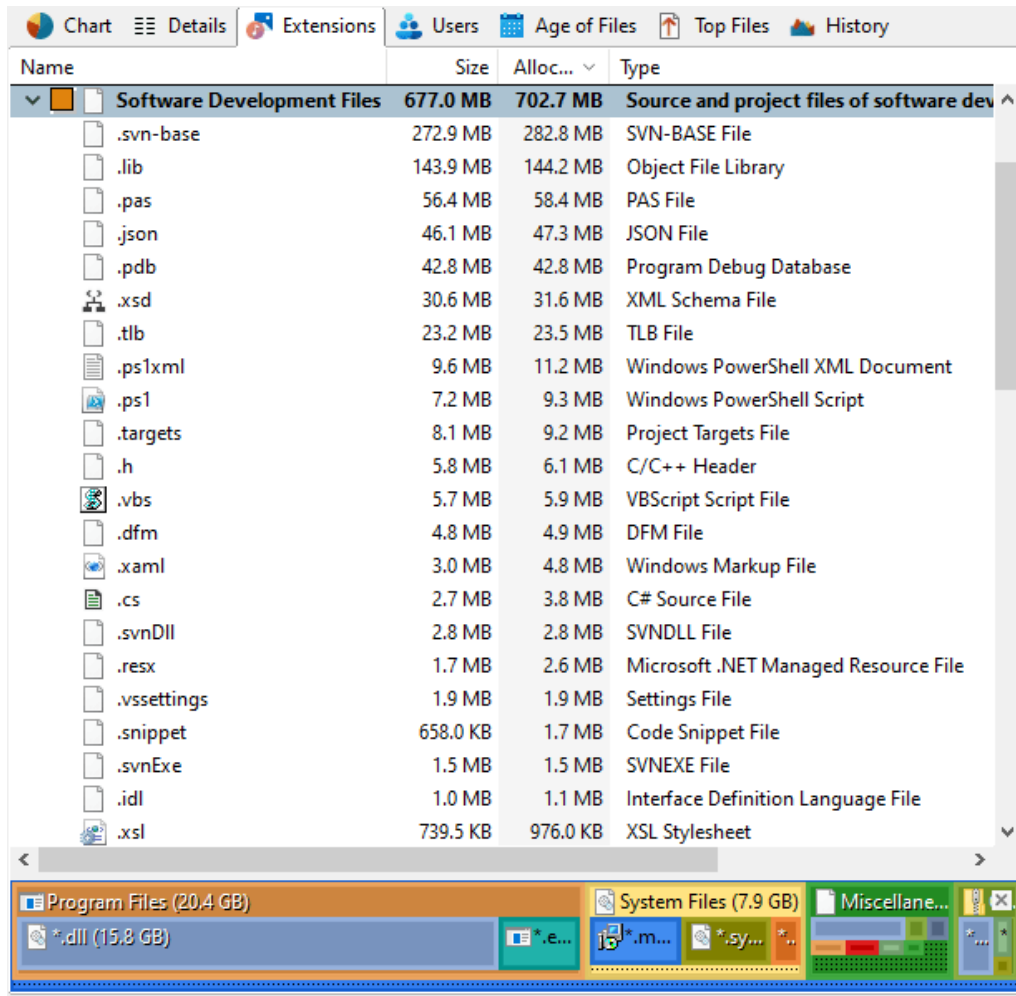


Name	Size	Alloc...	Type
Software Development Files	677.0 MB	702.7 MB	Source and project files of software dev
.svn-base	272.9 MB	282.8 MB	SVN-BASE File
.lib	143.9 MB	144.2 MB	Object File Library
.pas	56.4 MB	58.4 MB	PAS File
.json	46.1 MB	47.3 MB	JSON File
.pdb	42.8 MB	42.8 MB	Program Debug Database
.xsd	30.6 MB	31.6 MB	XML Schema File
.tlb	23.2 MB	23.5 MB	TLB File
.ps1xml	9.6 MB	11.2 MB	Windows PowerShell XML Document
.ps1	7.2 MB	9.3 MB	Windows PowerShell Script
.targets	8.1 MB	9.2 MB	Project Targets File
.h	5.8 MB	6.1 MB	C/C++ Header
.vbs	5.7 MB	5.9 MB	VBScript Script File
.dfm	4.8 MB	4.9 MB	DFM File
.xaml	3.0 MB	4.8 MB	Windows Markup File
.cs	2.7 MB	3.8 MB	C# Source File
.svnDll	2.8 MB	2.8 MB	SVNDLL File
.resx	1.7 MB	2.6 MB	Microsoft .NET Managed Resource File
.vssettings	1.9 MB	1.9 MB	Settings File
.snippet	658.0 KB	1.7 MB	Code Snippet File
.svnExe	1.5 MB	1.5 MB	SVNEXE File
.idl	1.0 MB	1.1 MB	Interface Definition Language File
.xsl	739.5 KB	976.0 KB	XSL Stylesheet

Below the table, a summary bar shows:

- Program Files (20.4 GB)
- System Files (7.9 GB)
- Miscellaneous...
- *.dll (15.8 GB)
- *.e...
- *.m...
- *.sy...
- *..

Context tab: Extensions

Use the Extensions tab in order to select specific information for viewing and sorting the data. In addition to these filtering options, the tab also provides commands to export the list contents.




The following commands are available on the "Extensions" tab:

Show files of this extension Show a list of all files of the selected file type.

Filter by this ...	Show only files with the selected file extension or files that belong to the selected file type group.
Clear filter	Remove the filter from the tree and show size information for all file types.
Add column for this [...] to the Details list	Adds a new column to the Details list, which shows how many files of the selected extensions exist within the current directory.
Export Extensions	Save the contents of this list to a file. If multiple items are selected, only the selected items will be saved. Available file formats are "Text Files (.txt)", "HTML Files (.html)", "Rich Text Format (.rtf)", "Microsoft Excel (.xlsx)", and "Comma Separated Values (.csv)".
Email	Send the content of the "Extensions" view via email.
Copy to Clipboard	Copy the content of this list to the clipboard. If multiple items are selected, only the selected items will be copied.
Print right pane	Print the contents of this list.
Select all	Select all items in the list.
Select none	Unselect the list items.
Invert selection	Invert the selection.
Show chart	Turn on or off a chart that shows the distribution of file extensions.
Group file types	Group similar file types in one group (e.g. "Audio Files", "Video Files", or "System Files"). You can configure the file groups in the Options dialog (See: " Options > View > File Groups " ⁷²).

6.5.4 Users

The **Users** view shows information on size grouped by users. At a glance you can see which user uses how much space in which folder. User statistics may be enabled/disabled in the options dialog ([Options > Scan > General](#)⁶²).

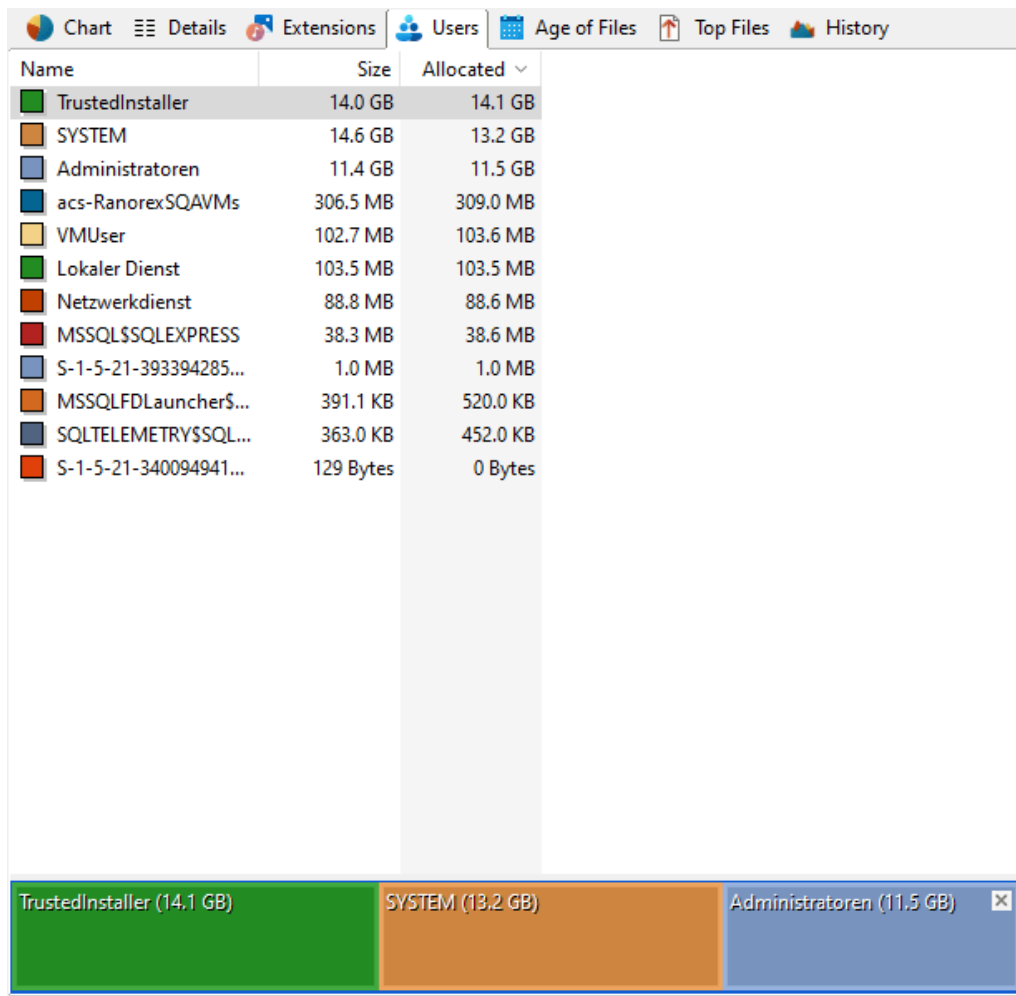


Name	Size	Allocated
TrustedInstaller	14.0 GB	14.1 GB
SYSTEM	14.6 GB	13.2 GB
Administratoren	11.4 GB	11.5 GB
acs-RanorexSQAVMs	306.5 MB	309.0 MB
VMUser	102.7 MB	103.6 MB
Lokaler Dienst	103.5 MB	103.5 MB
Netzwerkdienst	88.8 MB	88.6 MB
MSSQL\$SQLEXPRESS	38.3 MB	38.6 MB
S-1-5-21-393394285...	1.0 MB	1.0 MB
MSSQLFDLauncher\$...	391.1 KB	520.0 KB
SQLTELEMETRY\$SQL...	363.0 KB	452.0 KB
S-1-5-21-340094941...	129 Bytes	0 Bytes

Below the table, three colored bars represent the total size for selected users: TrustedInstaller (14.1 GB) in green, SYSTEM (13.2 GB) in orange, and Administratoren (11.5 GB) in blue.

Context tab: Users

Use the "Users" tab in order to select specific information for viewing sorting the data. In addition to these filtering options, the tab also provides commands to export the list contents.



The following commands are available on the "Users" tab:

- Show files of this user** Show a list of all files that are owned by the selected user(s).
- Limit to this user** Show only the files owned by the selected user.
- Clear filter** Remove the user filter and show the complete file and folder information of the currently selected branch.
- Add column for this user to the Details** Adds a new column to the Details list, which shows how many files of the selected user exist within the current

list	directory.
Export Users	Save the contents of this list to a file. If multiple items are selected, only the selected items will be saved.
Email	Send the content of the "Users" view via email.
Copy to Clipboard	Copy the content of this list to the clipboard. If multiple items are selected, only the selected items will be copied.
Print right pane	Print the contents of this list.
Select all	Select all items in the list.
Select none	Unselect the list items.
Invert selection	Invert the selection.
Show chart	Turn on or off a chart that shows the distribution of file ownership.

Additional columns

By right-clicking on the column header you can enable the following additional columns:


Full User Name	The full name of the user, queried from Windows or Active Directory.
User Comment	The user comment from Active Directory.
Quota Usage	The usage queried from Windows quota management. To see values in the quota columns, you must run TreeSize as administrator and quota must be enabled on the local drive that you were scanning.
Quota Limit	The size limit that is set for the user in the Windows quota manager.

6.5.5 Age of Files

The **Ages of Files** view shows the distribution of the age of scanned files, based on one of the following date attributes:


- Last Access Date
- Last Change Date
- Creation Date

Values for the specified period do not include the other, younger periods.

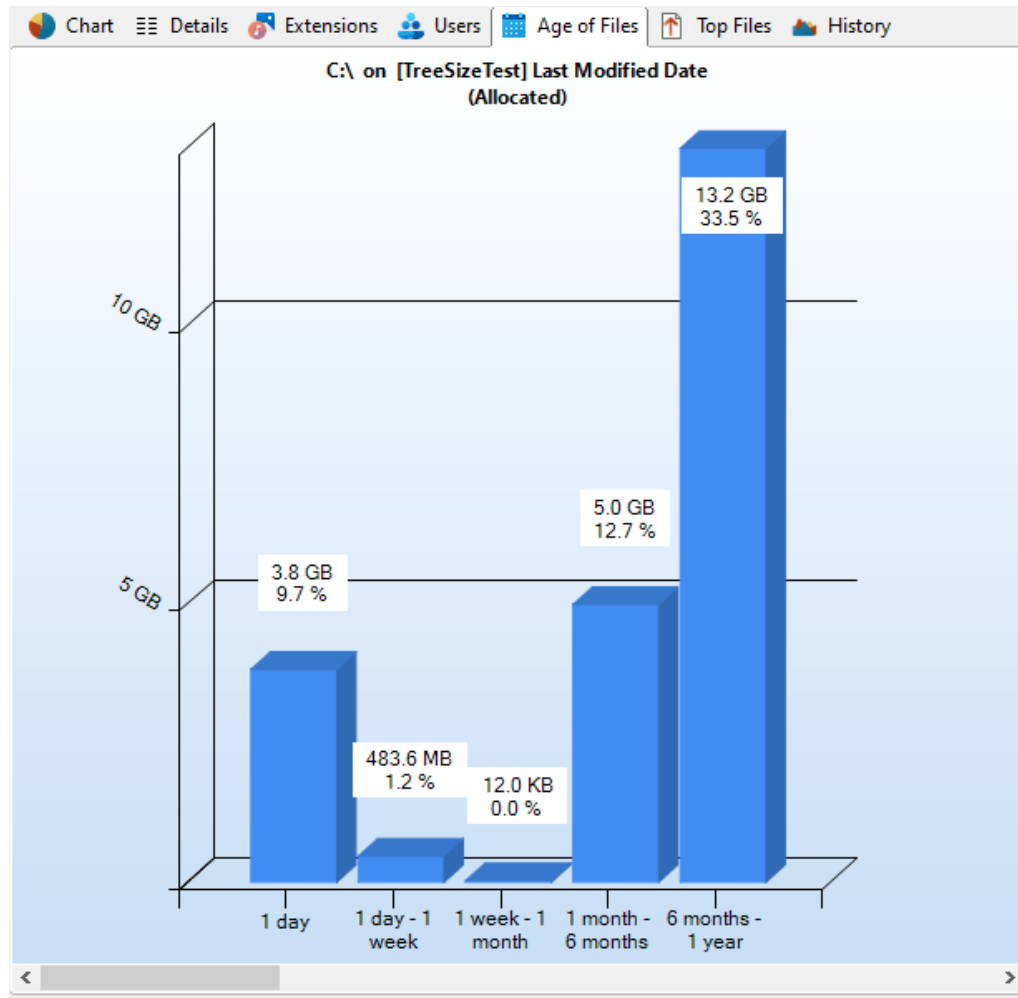

Context tab: Age of Files

The Ribbon tab for the "Age of Files" view offers export features equal to the Charts tab and enables you to [customize the intervals](#)^[74]. The boundaries of the intervals are always rounded to full days, i.e. to 00:00 a.m.



The following commands are available on the "Age of Files" tab:

- Export Chart** Save the current chart as graphic file.
- Email** Export the current chart and send it via email. You can configure your email settings in options dialog.
- Copy Chart to Clipboard** Copy the current chart to the clipboard, to paste it in other applications.

Print right pane	Print the current chart.
Customize file age intervals	Customize file age intervals (requires a scan refresh).
Add Age of Files to Details View	Adds a new column to the Details list, which shows how many files of the selected file age exist within the current directory.
Show chart in 3D	View chart in 3D or 2D.
Color gradient as background	Toggle the gradient in the background of the chart.
Colorize bars	Uses different colors for each of the displayed intervals.
Show grid	Show or hide grid lines for this chart.
Zoom in	Zoom in on the chart
Zoom out	Zoom out on the chart
Zoom 100%	Reset zoom to 100%

6.5.6 Top Files

The **Top Files** view lists the largest files in the scanned branch. Similar to the [Details](#)^[36] view, you can configure the information shown here using the column header of the list. Please note that files of the system directory "System Volume Information" and the "Recycle Bin" will not be listed in this view. In the [Options](#)^[60] dialog you may adjust the number of files shown in the list, and whether they will be chosen based on their plain file size or the space they actually allocate on the disk.

Name	Containing Path	Size	Allocated	Last Modified
Windows10.0-KB500...	C:\Windows\SoftwareDistribu...	578.7 MB	578.8 MB	9/14/2021
b0675.msi	C:\Windows\Installer\	324.3 MB	324.3 MB	4/4/2019
Windows10.0-KB451...	C:\Windows\SoftwareDistribu...	263.2 MB	263.3 MB	9/13/2019
chrome.7z	C:\Program Files (x86)\Chro...	235.7 MB	235.7 MB	9/1/2021
32965.msi	C:\Windows\Installer\	175.3 MB	175.3 MB	8/3/2021
chrome.dll	C:\Program Files (x86)\Chro...	162.0 MB	162.0 MB	9/1/2021
BootPerfDiagLogger...	C:\Windows\System32\WDI\...	157.0 MB	157.0 MB	2/28/2022
65a6365ec858229008...	C:\Windows\SoftwareDistribu...	145.5 MB	145.6 MB	9/14/2021
b0672.msi	C:\Windows\Installer\	141.1 MB	141.1 MB	8/22/2017
NDP48-DevPack-EN...	C:\ProgramData\Package Ca...	137.0 MB	137.0 MB	6/14/2021
chromium.nupkg	C:\ProgramData\chocolatey\L...	134.1 MB	134.1 MB	9/14/2021
0b044e4e4feca3fe76...	C:\Windows\SoftwareDistribu...	126.8 MB	126.8 MB	9/14/2021
MicrosoftEdge_X64_...	C:\Program Files (x86)\Micro...	112.0 MB	112.0 MB	2/28/2022
MicrosoftEdge_X64_...	C:\Program Files (x86)\Micro...	112.0 MB	112.0 MB	2/28/2022
msedge.dll	C:\Program Files (x86)\Micro...	186.2 MB	106.1 MB	2/23/2022
msedge.dll	C:\Program Files (x86)\Micro...	186.2 MB	106.1 MB	2/23/2022
b067a.msi	C:\Windows\Installer\	105.7 MB	105.7 MB	1/27/2019
mysql-8.0.15-winx64...	C:\ProgramData\MySQL\MyS...	105.7 MB	105.7 MB	1/27/2019
Edge.wim	C:\Windows\WinSxS\amd64_...	102.3 MB	102.3 MB	4/8/2021
edge.wim	C:\Windows\servicing\LCU\P...	102.3 MB	102.3 MB	7/31/2021
edge.wim	C:\Windows\servicing\LCU\P...	102.3 MB	102.3 MB	7/4/2021
MicrosoftEdgeStand...	C:\Windows\WinSxS\amd64_...	93.0 MB	93.0 MB	3/8/2021
SOFTWARE	C:\Windows\System32\config\	92.0 MB	92.0 MB	2/28/2022
MicrosoftEdgeStand...	C:\Windows\WinSxS\amd64_...	91.1 MB	91.1 MB	11/19/2020
modules	C:\JenkinsAgent\jre\lib\	89.8 MB	89.8 MB	10/19/2021
MicrosoftEdgeStand...	C:\Windows\WinSxS\amd64_...	86.6 MB	86.6 MB	11/20/2020

Context tab: Top Files

The Ribbon tab for the "Top Files" list provides several file-related operations as well as common export features.



The following commands are available on the "Top Files" tab:

- Delete** Delete all selected files.
- Properties** Show the properties for the currently selected file.
- Export Top Files** Save the contents of this list to a file. If multiple items are selected, only the selected items will be saved.
- Email** Send the content of the "Top Files" view via email.

Copy to Clipboard	Copy the content of this list to the clipboard. Copy the content of this list to the clipboard. If multiple items are selected, only the selected items will be copied.
Print right pane	Print the contents of this list.
Select all	Select all items in the list.
Select none	Unselect all list items.
Invert selection	Invert the selection.
Open in Windows Explorer	Open Windows Explorer to show the folder containing the selected file.
Copy as path	Copy the path of the selected items to the clipboard.

6.5.7 History

In the **History** view you can see line charts visualizing the size development of the selected root folder. After each scan the size, allocated space, and number of files of the root folder are stored automatically in an XML file in the users profile of the currently logged-in user. These sizes are used to create this view. As a result the shown interval and frequency depends on the scans you have performed for this root before.


Please note:

- By default, only scans of the same path and the same [exclude filters](#) ⁶⁴ will be displayed in the history, since a common base is needed to compare scans. Using the **Ignore scan filter** option allows to include scans of the same path, but with differing exclude filters.
- If you are interested in the size development of subfolders in the scanned file system tree, we recommend using our disk space manager [SpaceObServer](#), which archives file system information in a database and is able to track size development down to file level.



Context tab: History

Use the "History" tab to customize the appearance of the chart, to export the chart to a file, and to manage history data.




The following commands are available on the "History" tab:

- Export chart** Save the current chart as graphic file.
- Email** Export the current chart and send it via email. You can configure your email settings in options dialog.
- Copy Chart to Clipboard** Copy the current chart to the clipboard, to paste it into other applications.
- Print right pane** Print the current chart.
- Manage history data** Provides actions for the export/import and purge of history data. Additionally allows choosing a new storage location for the data.
- Show zero point** Show zero point as minimum value in the chart.
- Show "Size/Allocated" series** Do not only show the currently selected value (size/allocated), but also the respective other one

Ignore scan filter	If activated, all scans of the current path will be included with the chart, regardless of the filters used for each of the scans.
Show average series	Show or hide a line indicating the average trend for this chart.
Show labels	Show info boxes (size values/number of files) in the chart.
Show total diskspace	Show or hide a horizontal line showing the total disk space.
Equalize chart	defines whether the chart is displayed interpolated or exact.
Color gradient as background	Toggle the gradient in the background of the chart.
Show data points	Show or hide points on line chart.
Zoom in	Zoom in on the chart
Zoom out	Zoom out on the chart
Zoom 100%	Reset zoom to 100%

Remove data point

Using the context menu of the History view, you can remove single data points. Please note that this requires the **"Show data points"** option to be enabled (see above).

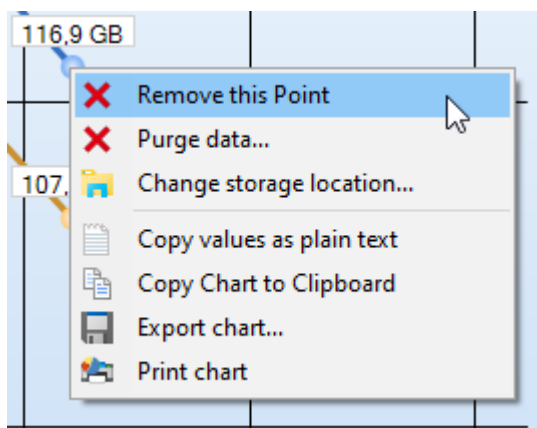

6.6 Drive List

The **Drive List** shows the local drives as well as the connected network drives. You can see the size of the drive as well as the free disk space. The

S.M.A.R.T. column offers a quick info about the **health and hardware status** of supported devices.

Double-clicking starts a scan of the selected drive.


Name ^	Total Size	Free	% Free	S.M.A.R.T
C:\	125 GB	91.5 GB	73 %	No SMAR
D:\	989 MB	973 MB	98 %	No SMAR
T:\	0.99 TB	450 GB	44 %	

Notes

- S.M.A.R.T. is available only for local drives supporting the S.M.A.R.T. standard ([Self-Monitoring, Analysis and Reporting Technology](#)). Windows grants access to these values only to processes that have been started "as administrator" and if the installed driver supports this.
- Additionally to the listed drive UNC paths can be added using the right click menu.
- You can use wildcards when defining the paths to be scanned. This way, you can even scan paths like "S:\Users\R*" or "R:*MyVideos".
- You can scan all shared drives in your network by entering * in the drive combo box.
- The drive list can be automatically exported into an Excel, Text, or CSV file by using the [command line option](#) `" /EXPORTDRIVESLIST"`.

Context tab: Drive List

The Drive List has its own Ribbon context tab providing several additional actions for the Drive List.



The following commands are available on the "Drive List" tab:

- | | |
|-------------------------------------|--|
| Properties | Shows the properties for the selected drive. |
| Open in Windows Explorer | Opens the currently selected drive(s) in the Windows Explorer. |
| Remove from list permanently | Removes the selected path or drive permanently from the list. |

Map network drive	Opens the Windows "Map Network Drive" dialog.
Add drive or UNC path	Enables you to select or enter a path or drive and add it to the drive list.
Add all shares of a server	Adds all shares of a server to this list as UNC paths.
Export	Exports drive list information (path, size, free space, etc.) to an Excel or text file.
Copy list to clipboard	Copies drive list information (path, size, free space, etc.) to the clipboard.
Import from clipboard	Imports all paths currently contained in the clipboard into the drive list.
Print	Prints drive list information (path, size, free space, etc.).
Show drive names	Activate this option to show the names assigned to the drives in Windows, additionally to the drive letters.

6.7 Snapshots

The Snapshot feature of TreeSize provides a quick overview on the development of disk space usage for the selected path. A snapshot can be described as "photography" of the disk space status at a certain point in time. It is created within seconds and Windows will automatically delete it if the space it occupies is needed. The amount of disk space reserved for snapshots can easily be configured via TreeSize or the Windows System Configuration ([Tools](#)¹⁹ > Configure Windows System Restore).

Creating a snapshot

Creating snapshots from within TreeSize is only supported for local drives, not for network drives. You need to run TreeSize as administrator in order to be able to create snapshots.

To create a new Snapshot, please click the "Create snapshot" button on the "[Tools](#)¹⁹" Ribbon tab. Creating the snapshot may take a moment.

If the feature is disabled on the system, no snapshot can be created for any local partition. Check the settings in your Windows environment via Control Panel > System and Security > Computer Protection : it must be switched to ON for the system partition and for every partition you want to use with the snapshot feature.

This feature is not supported on Windows XP.

Comparison with a snapshot

You can compare a current scan with a previous scan using the [comparison feature](#)^[54]. This gives you an in-depth overview of each folder and file and its size development since the creation of the given snapshot. Not only remote Windows systems are supported, but also non-Windows systems like storage system from NetApp and EMC.

6.8 Disk Usage Comparison

For a detailed analysis of your disk space usage it may be helpful not only to see the current usage, but also its development over time.

TreeSize provides a powerful comparison mode enabling you to analyze size development over a period of time. For that purpose, TreeSize compares data of the current scan with historical data. There are two different data sources available for the comparison:

- Previously saved TreeSize scans (XML report).
- Snapshots of the file system (available only for local NTFS drives).

To enable the comparison mode, please follow these steps:

1. Scan the path you want to view the size development for to get current results.
2. Go to [Scan](#)^[17] > [Compare with saved scan](#)^[18] or [Compare with snapshot](#)^[18].
 - If you selected "Compare with saved scan", you may now choose the XML file of the previously saved scan.
 - If you selected "Compare with snapshot", a dialog will open enabling you to choose a snapshot.
3. Select if you want to view size changes in the Directory Tree, in [Views](#)^[30], or both.

By comparing a scan result with a previous scan, you can easily see which files and folders were added and removed and analyze the space development in that time period. This can help to identify files and folders that grow in size regularly and could eat up your space quickly if not handled at an early stage.


Comparison with a snapshot

TreeSize provides several different ways to compare your scans with each other. The easiest way to do this is the [snapshot feature](#)^[53]. A snapshot could be described as a "photography" of the disk space status at a certain point in time. Major benefits of this mechanism are, that it can be created within seconds and Windows will automatically delete it if the disk space that it occupies is needed.

To compare a disk space scan with a snapshot, simply select a scan in the [Directory Tree](#)^[27]. Now click the "Compare with snapshot" button on the

"[Scan](#)"^[17] Ribbon tab. You can also use the [Application Menu](#)^[10] ("File" > "Compare current scan" > "Compare with snapshot").

The following dialog shows a list of the available Snapshots sorted according to their time-stamp. It also shows the free space of each Snapshot, making it easy to spot exactly when the disk space on the hard drive where the current scan path resides on has increased or decreased. After selecting a Snapshot, click the "Compare" button to start the size comparison process.

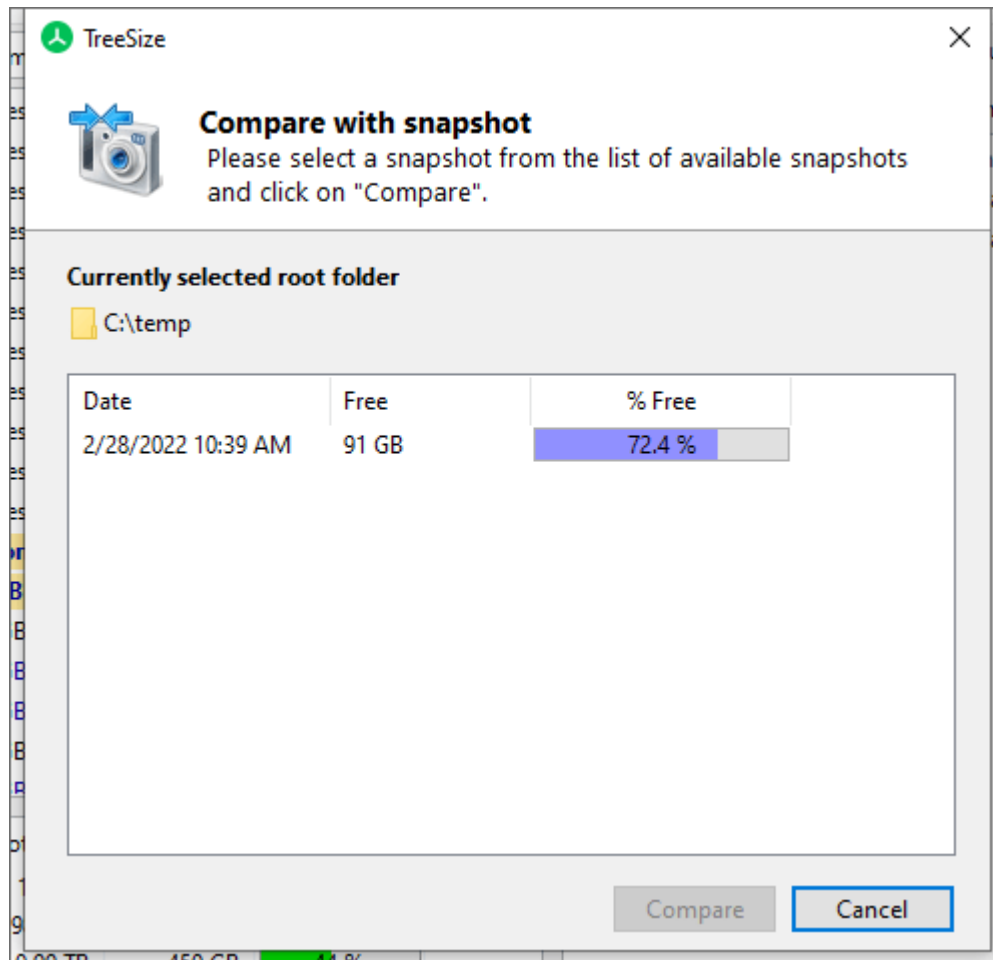

Please note: if this list is empty or an error message "No snapshots available for this scan" appears, there are two possible reasons for that: either no snapshots are existing or not all necessary services are running on the destination system. You can verify this by doing a right-click on the destination directory, open properties and select the "Previous Versions" tab. If no snapshots are listed there, the program itself can also not list any entries. If you see entries there then not all required services have been running. These services have now been started implicitly by opening the dialog and if you now execute "Compare with snapshot" again, you should see the correct results.


Comparison with saved scan

Scans results can be written into XML files at any given time, which provides a history of your disk usage. These files can be stored away and reused in a later step for detailed analysis. You can use this information to compare your current scan results with the situation at any given time in the past.

To compare a disk space scan with a saved scan, select a scan in the [Directory Tree](#)^[27] and click the "Compare with saved scan" button on the [Scan](#)^[17] Ribbon tab. You can also use the [Application Menu](#)^[10] ("File" > "Compare current scan" > "Compare with saved scan"). The subsequent dialog allows you to select a previous scan that has been saved into an XML file.

Displaying the comparison

The result of the size comparison can be viewed in the [Directory Tree](#)^[27], in the [Details](#)^[36] view, or in both at the same time.

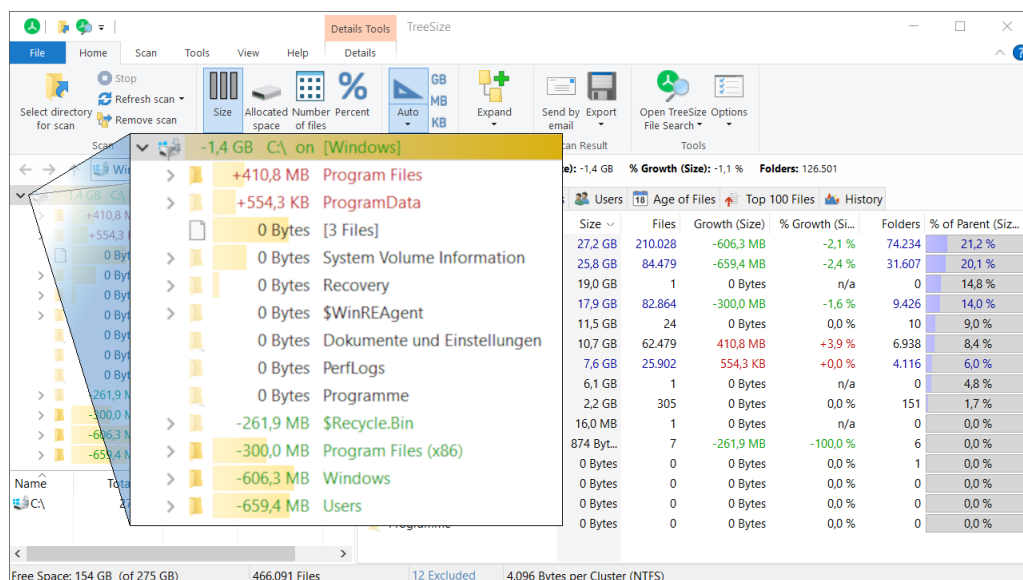

Elements that are highlighted in red have increased the disk space usage compared to the saved scan or snapshot, while a green element indicates that the disk space usage is now lower than in the saved state used for comparison. You can choose whether you want to compare the size, the allocated space, or the number of files between the two scans by clicking the corresponding button in the [Home](#)^[15] Ribbon tab.

6.9 Azure AD Configuration

If a SharePoint Online site is configured to require a multi-factor authentication, TreeSize will perform a browser based authentication (as known from other Azure AD apps).

To enable TreeSize to get authentication tokens from your Azure AD tenant, you have to register it in your [Azure portal](#) first and grant it permission to access Office 365 SharePoint Online:

Register TreeSize with your tenant

Please note that the following steps have to be done out of the scope of TreeSize. They may change with the ongoing development from Microsoft.

1. Sign in to the [Azure portal](#).
2. Select on **All services** in the left-hand navigation, and choose [App registrations](#) (or use the search field in the top bar)
3. Select **New application registration** and create a registration with values like:

[Home](#) > [App registrations](#) >

Register an application ...

*** Name**

The user-facing display name for this application (this can be changed later).

 ✓

Supported account types

Who can use this application or access this API?

- ☒ Accounts in this organizational directory only (JAM Software GmbH only - Single tenant)
- ☐ Accounts in any organizational directory (Any Azure AD directory - Multitenant)
- ☐ Accounts in any organizational directory (Any Azure AD directory - Multitenant) and personal Microsoft accounts (e.g. Skype, Xbox)
- ☐ Personal Microsoft accounts only

[Help me choose...](#)

Redirect URI (optional)

We'll return the authentication response to this URI after successfully authenticating the user. Providing this now is optional and it can be changed later, but a value is required for most authentication scenarios.

Public client/native (mobile ... ▼

 ✓

- **Name:** An application name of your choice to identify the registration in the Azure AD. We would propose to use TreeSize.
 - **Redirect URI:** Sometimes referred to as reply URL. Please select 'Public client/native' here. Because TreeSize uses MSAL for authentication, please either use the redirect URI provided for this purpose, or define your own according to the scheme "My URI"://auth, e.g. treesize://auth
4. Once the registration is completed, AAD will assign a unique Application ID to the app. Copy this value from the right pane, as it will be required for the next steps.
 5. Navigate to **API Permissions** in the left list, and choose **Add a permission**.
 - Select **SharePoint** as the API
 - Under **Delegated Permissions**, configure the permissions you want the user to delegate to TreeSize, and confirm the changes using the **Done** button.

- If a permission has not been granted here, the user may not use TreeSize to perform the affiliated action, even though he would be allowed to do so with the web interface.
 - If a permission has been granted here, but not to the actual user, an affiliated action would still fail (the user won't become any more privileges).
 - To access SharePoint pages, the `allSites.Manage` permission is required.
 - If you want to restrict the access to document libraries only, the `AllSites.Read` permission is sufficient.
 - To scan all site collections connected to a site, the privilege '*Run search queries as a user*' is required.
 - To allow the user to upload files, the privileges '*Read and write user files*' and '*Read and write items and lists in all site collections*' may be required.
- Click on **Grant permissions** to apply the changed permissions to your account.
 - Depending on which permissions you selected, the changes need to be approved by an administrator (**grant admin consent**)
6. In order to use the **SSO for domain-joined Windows** (Windows Integrated Auth Flow) or the user credentials entered via TreeSize, the option **Allow public client flows** under **Authentication -> Advanced** settings needs to be enabled.

Advanced settings

Allow public client flows ⓘ

Enable the following mobile and desktop flows:



- App collects plaintext password (Resource Owner Password Credential Flow) [Learn more](#)
- No keyboard (Device Code Flow) [Learn more](#)
- SSO for domain-joined Windows (Windows Integrated Auth Flow) [Learn more](#)

7. If you want to use a certificate to allow TreeSize to identify itself to the authentication service, instead of using user-related login information you will first need to create a self-signed certificate. To do so, please read [here](#). You need to add the *.cer file created in the process to your app registration under **Certificates & Secrets**. You can then use the *.pfx file to log in via TreeSize

Provide TreeSize with the configuration information

In order to use the app registration made above, the information has to be provided to TreeSize. There are two options available how to achieve this:

- If you want to configure these settings for a single user/computer only, e.g. to evaluate and test the settings, you can simply pass them to TreeSize using the following command line parameters. TreeSize will remember these values, so you would have to configure them only once.

○ /AADApplicationID followed by the [Application ID](#)^[57] assigned by the Azure Portal, e.g. /AADApplicationID xxxxxxxx-yyyy-xxxx-yyyy-xxxxxxxxxxxx, and

○ /AADRedirectURI followed by the [Redirect URI](#)^[57] specified during the registration assigned, e.g. /AADRedirectURI TreeSize://auth

- If you are an administrator and want to configure these settings for a group within your company, you can define an define a group policy object to roll them out:

1. Open the **Group Policy Management Console**, and navigate to the GPO you want to contain the configuration or create a new one.

2. Under **User Configuration > Settings > Windows-Settings > Registry** add two new entries

1. For the Application ID:

- Hive: Use `HKEY_LOCAL_MACHINE` or `HKEY_CURRENT_USER`
- Path: Set to `SOFTWARE\JAM Software\TreeSize`
- Name: Set to `AADApplicationID`
- Value type: `REG_SZ`
- Value data: Enter the **Application ID**^[57] obtained from the AAD

2. For the Redirect URI:

- Hive: Use `HKEY_LOCAL_MACHINE` or `HKEY_CURRENT_USER`
- Path: Set to `SOFTWARE\JAM Software\TreeSize`
- Name: Set to `AADRedirectURI`
- Value type: `REG_SZ`
- Value data: Enter the **Redirect URI**^[57] configured with the AAD

User permissions and permission levels in SharePoint Server

In order for a user to be able to scan SharePoint pages using TreeSize, the user must be granted certain permissions in SharePoint.

- A user needs a permission level on the pages he is allowed to scan, which contains the website permission "Browse directories".
- If the standard permission levels are to be used, the user needs at least the permission level "Contribute" on these pages.

Please note that the "SharePoint admin" role does not automatically grant a user access to all websites. If a SharePoint admin should be able to use TreeSize to scan SharePoint sites, please check the assigned permission levels here as well.

Problems with authentication

- If a user is not able to connect to SharePoint via TreeSize despite the assigned permissions, please check if this user has a valid Office 365 license.

6.10 Options Dialog

The options dialog of TreeSize enables you to modify scan, appearance, and startup settings of the application as well as customize any supported export format (Text, Excel, etc).

These are the available options pages:

Scan

[General](#)^[62] General settings influencing the scan behaviour of TreeSize.

[Filter](#)^[64] Define filtering options for TreeSize.

View

[Display](#)^[66] General settings influencing the appearance of TreeSize.

[Details](#)^[69] Configure the columns shown in the [Details](#)^[36] view of TreeSize.

[Directory Tree](#)^[70] Customize the appearance of the [Directory Tree](#)^[27] of TreeSize.









[File Groups](#)^[72] Define which file extensions will be grouped together in the [Extensions view](#)^[42] of TreeSize.

[Age of Files](#)^[74] Configure the intervals used to generate the charts of the [Age of Files](#)^[45] view.



[Charts](#)^[75] Configure the amount of information that is shown in the chart related views of TreeSize and the way that they are displayed.

[Top Files](#)^[76] Configure any options that apply to the [Top files](#)^[47] view, like the number of files to include.

Export

- [Printer](#)  77 Configure printer settings for TreeSize.
- [PDF](#)  80 Configure the PDF file report of TreeSize.
- [Excel](#)  81 Configure the Microsoft Excel file report of TreeSize.
- [HTML](#)  84 Configure the HTML file report of TreeSize.
- [CSV](#)  86 Configure the CSV (comma-separated-values) file report of TreeSize.
- [XML](#)  88 Configure the XML file report of TreeSize.
- [Text](#)  89 Configure the plain text file report of TreeSize.
- [Email](#)  91 Configure email settings for TreeSize.


System

- [Start](#)  95 Modify startup settings for TreeSize.
- [Context Menu](#)  97 Configure the Windows Explorer context menu integration of TreeSize.

6.10.1 Scan

6.10.1.1 General

General settings influencing the scan behaviour of TreeSize.

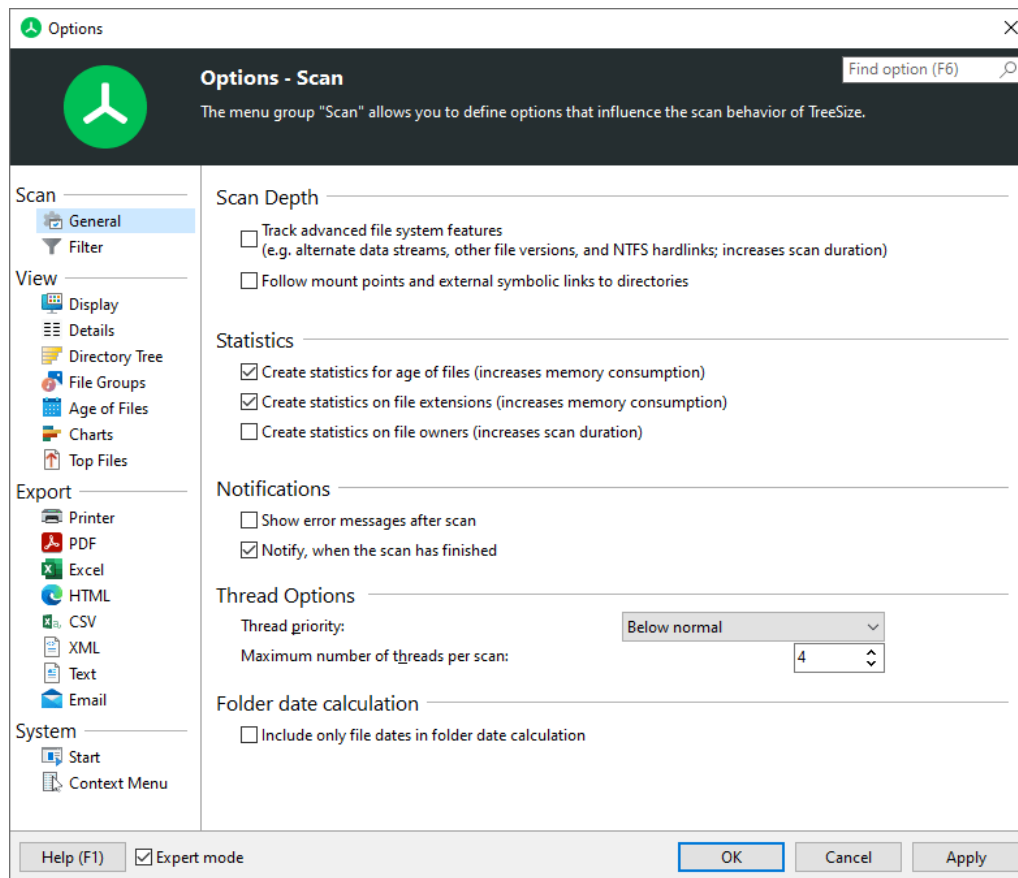

Please note

- Changes applied here usually require a rescan of the currently scanned drives and folders to take effect.

Scan Depth

Track advanced file system features

With this option you can control whether TreeSize should check each file if it is just a [hardlink](#)^[180] to another file, if it contains [alternate data streams \(ADS\)](#)^[179], or if there are other versions stored of this file. This will result in more accurate results for the allocated space, but will also slow down the speed of a scan.

Follow mount points and external symbolic links to directories

You can decide if TreeSize should follow symbolic links and mount points (see [Notes on NTFS](#)^[178] for additional information) that point to other drives or folders on other drives. Links that point within the scanned directory will never be

followed in order to prevent circular references and folders from being counted twice.

Statistics

Create statistics for age of files

If this checkbox is activated, TreeSize will generate statistics for the age of files in each sub tree. The results can be viewed on the [Age of Files](#)^[45] view of the main window. The creation of these statistics will increase the memory consumption of the application.

Create statistics on file extensions

If this check box is activated, TreeSize will generate statistics for the file extensions in each sub tree. The results can be viewed on the [Extensions view](#)^[42] of the main window. The creation of these statistics will increase the memory consumption of the application.

Create statistics on file owners

If this check box is activated, TreeSize will generate statistics for the file owners in each sub tree. The results can be viewed on the [Users view](#)^[43] of the main window. Since it is necessary to query the owner of each file, this option will slow down the scanning process if activated.

Notifications

Show error messages during scan

Use this option to decide whether TreeSize should show error messages during scanning. If you, for example, scan a network drive on a Windows server and don't have reading access to all folders, Windows will pop up an error message for every unreadable folder. If you don't want the scanning process interrupted by these message boxes, uncheck this check box.

Notify when the scan is finished

Shows a message in the Windows system tray, once a longer running scan is finished.

Thread Options (expert option)

Thread Priority


Enables you to define the priority with which the threads scanning the hard disk are running. "Idle" means that the CPU will be used only if no other threads are using it. "Idle" is a good setting if you want to make sure that a scan with TreeSize has no impact on the performance of the PC or server. The default and recommended value is "lower priority". Choosing a higher priority will result in the scan threads having a higher priority than the thread of the user interface, which can make the user interface unresponsive during a scan. This setting is also used for the threads of the [TreeSize File Search](#)^[97].

Maximum number of threads per scan

TreeSize automatically adjusts the number of threads to the CPU usage. This option lets you define the maximum number of threads that will be started for a scan. If the system load is high, fewer than the maximum number of threads may be started.

6.10.1.2 Filter

Define filtering options for TreeSize. If you need information about e.g. certain file types only, you can specify a filter using this options page. Please note that changes on this options page usually require a rescan of the currently scanned drives and folders to take effect.

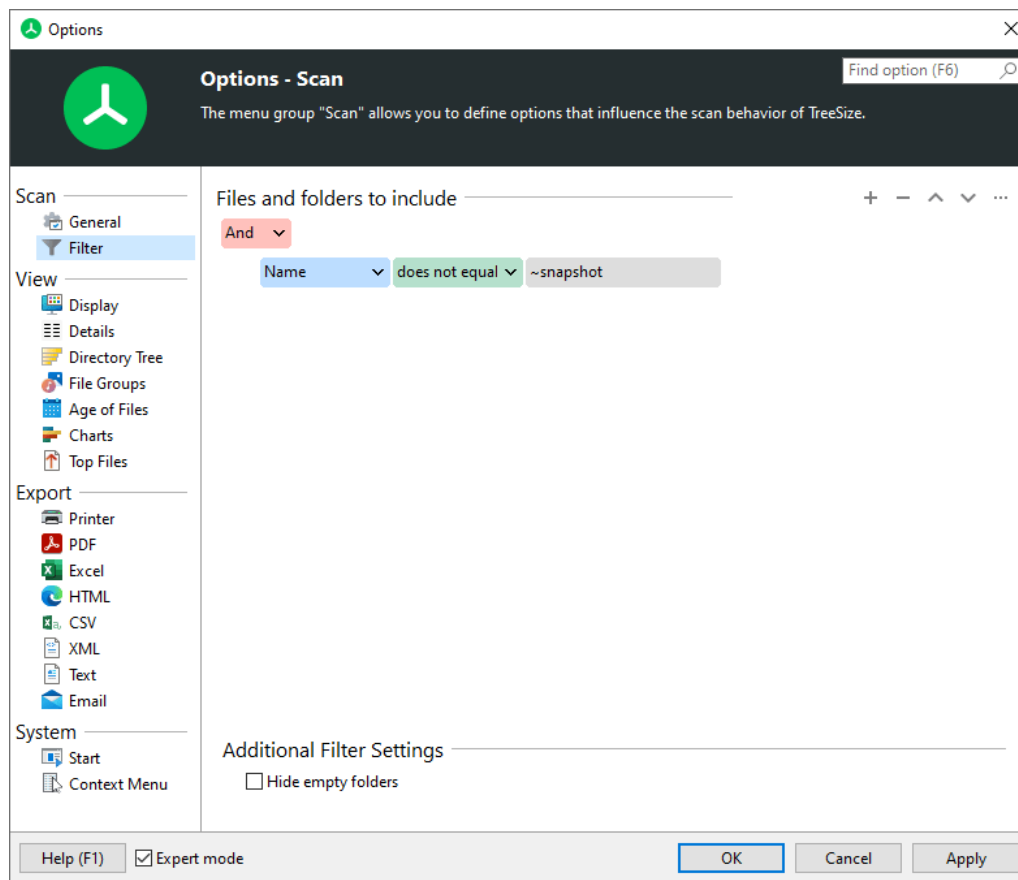

How to define a filter (exclude or include)

To define a new filter, please follow these steps:


1. Click the "Add pattern" button. An entry will be created in the filters list for the new filter.
2. Decide whether this filter shall operate as an **exclude or include filter** using the "**Action**" selector of the newly created entry. An exclude filter for the pattern "*.exe" for example will make TreeSize to not show any files with the extension ".exe". This will also affect the calculated values such as the "Size" in the [Directory Tree](#)^[27] as well as any other [view](#)^[30]. An include filter, on the other hand, will make TreeSize show only items that match this pattern. To return to the previous example, an include filter of "*.exe" would

result in a Directory Tree showing only data related to files that have the extension ".exe". If you have chosen to match against **File Type**, the edit field will show a dropdown button that allows to choose [file type groups](#)⁷² like "Office files" or "Video Files".

3. Define the actual pattern. You can either use simple **Wildcard pattern** such as "*.exe", **Regular Expression** patterns such as ".+\\.exe\$", or patterns that match **full names** like "notepad.exe". Please make sure that you select the matching pattern type on the "**Type**" selector on the right side of the window.
4. The "Match Against" selector is used to specify the element/attribute against which the pattern is compared. Patterns can either be matched against file names, (full) paths, owners, folder names, or object names. You can use the "owner" filter to, for example, include or exclude certain file owners from the TreeSize scan results. With the "full paths" or "folder name" filter you can include or exclude complete directory branches matching a certain pattern (e.g. "*\\Program Files*"). The "file name" filter should be used when you intend to include or exclude certain file extensions (e.g. "*.tmp"), like described in step 2.

Preview the results

The "Preview" button enables you to view the results of a defined search pattern. The preview will use the currently selected pattern to show an Explorer-like view highlighting excluded and included items in appropriate colors (red and green). The following screenshot shows the results of an exclude filter for full paths that match the pattern "Program Files".

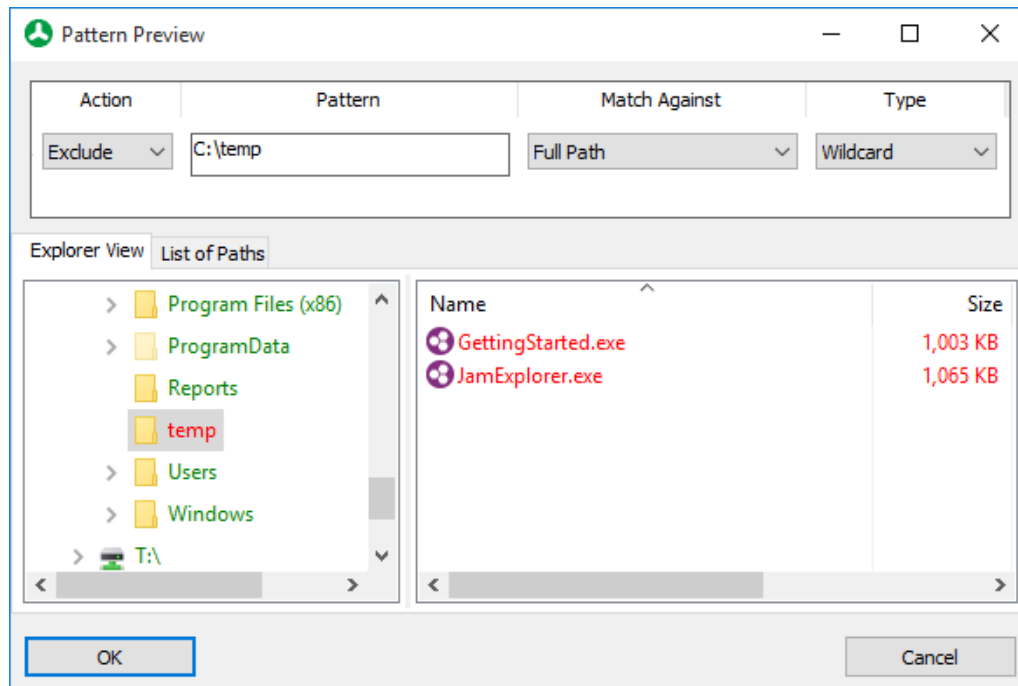

The following list describes additional filter settings that can be defined on this options page.

Additional Filter Settings

Include only files created in the past ... days

If this option is set, only files and folders which have been created within the specified amount of days will be scanned. This can be useful to calculate the size of backups or to identify "heavy growing" folders. A value of "0" means that all files will be included (default).

This is a volatile setting and won't be persisted. It applies to the running instance of TreeSize only.

Include only files with "archive" attribute

Check this option if you want to count only files for which the "archive" attribute has been set. This can be useful to determine the size of backups.

This is a volatile setting and won't be persisted. It applies to the running instance of TreeSize only.

Exclude offline files

This option enables you to exclude files that are marked as "offline". Offline files are often not physically present on the disk or are only cached temporarily on the local disk.


Hide empty folders

Check this option to hide empty folders from the view. A folder is considered empty if no file or folder has been found or if all contained files have been filtered.

6.10.2 View

6.10.2.1 Display

General settings that influence the appearance of TreeSize.

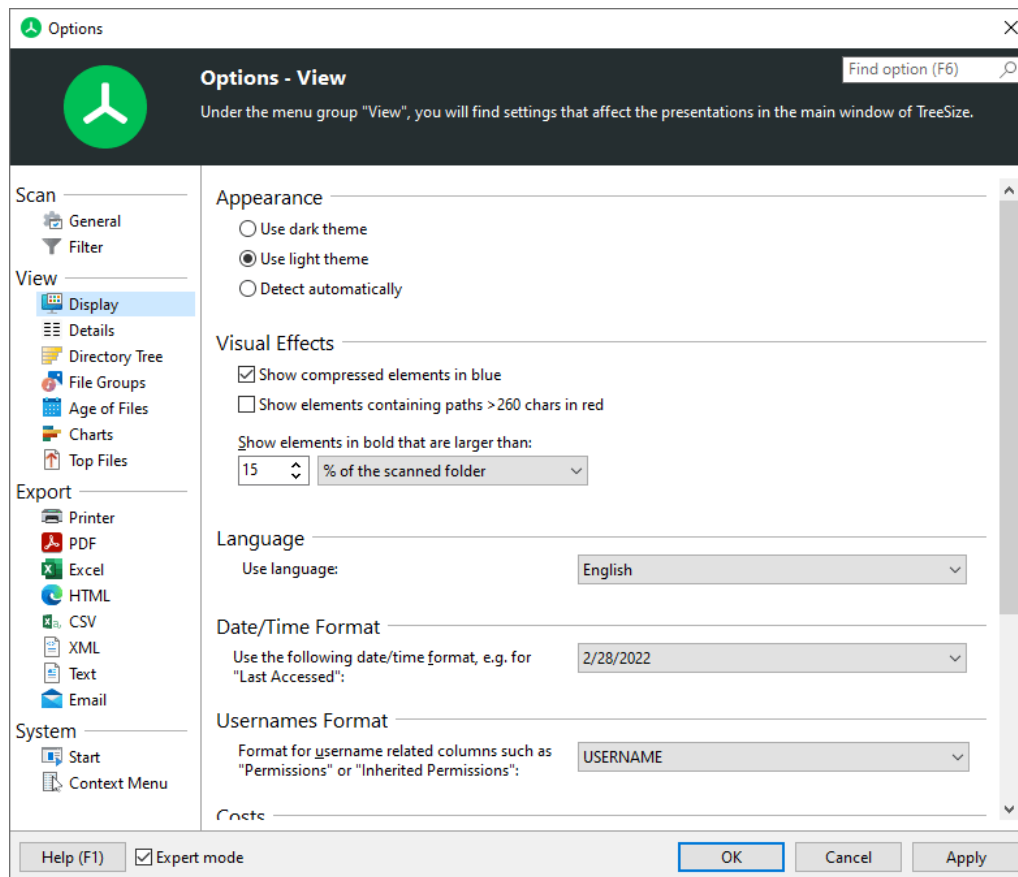

Appearance

Use dark theme / light theme / detect automatically

With this option the appearance of the application can be changed. You can switch between light and dark mode. The option for automatic detection is based on your current Windows setting and automatically adapts the appearance of TreeSize to

Visual Effects

Show compressed elements in blue

If this option is selected, compressed files on an NTFS volume are shown in a blue color. Folders that are partially compressed will have a dark blue color, files and folders that are entirely compressed will show up in a light blue color. For more information on file-based compression see [Notes on NTFS](#)^[178].

Show elements containing paths >260 chars in red

Select this option, if folders containing long paths should appear in a red color. This is useful for finding file system structures that exceed the Windows [MAX_PATH](#) constant. Many tools and the .NET framework have problems with these long paths. Using the [advanced search](#)^[124] of the TreeSize File Search you also can search for such files.

Show elements in bold that are larger than ...

Use this option to define a threshold at which folders in TreeSize will be shown bold. You can either define a percentage value [% of the scanned folder] or a size value [Megabytes (allocated space)]. Folders will be shown bold in the [Directory Tree](#)^[27] and in the [Details view](#)^[36] of TreeSize.

Language**Use language**

Select the language that is used for TreeSize's user interface.

Date/Time Format**Use the following date/time format, e.g. for "Last Access":**

The date/time format that is used by TreeSize in related columns like "Last Access", "Last Change", or "Creation Date" can be defined here. Available formats are date, date+time (without seconds), and date+time (with seconds). Please note that in some rare cases TreeSize may display "wrong" date/time format. For more information on this issue, please refer to [this article](#) from our Knowledge Base.

Username format

Offers various choices how usernames should be displayed.

Costs

Configure the cost value (per GB) and unit for the cost of calculated for the allocated space of files and folder.

The cost can be displayed in an own column "Cost" in the "[Details](#)"^[36] list and in your exports.

Expert Options**Number of paths in the "Recently scanned" list:**

Here you can adjust the maximum number of entries shown in the "File -> Recently scanned" list. The maximum value for stored paths is 20.

Automatically update right pane during scan

If this option is selected, the right pane of the window will be updated from time to time. This allows you, for example, to watch the bars of a chart growing while scanning large drives. Use the drag bar to set the interval of the updates.

Determine icons based on file extension only


If this option is selected, the default icon for files based on the file extension is used. This is much faster, especially on network drives.

Enable Drag & Drop

Allows to deactivate the drag and drop features of TreeSize. Turning off drag and drop should prevent unwanted changes on critical systems.


6.10.2.2 Details

This options page can be used to configure the columns shown in the [Details](#)³⁶ view of TreeSize. For a description of the available columns please refer to "[Available columns](#)"³⁹.

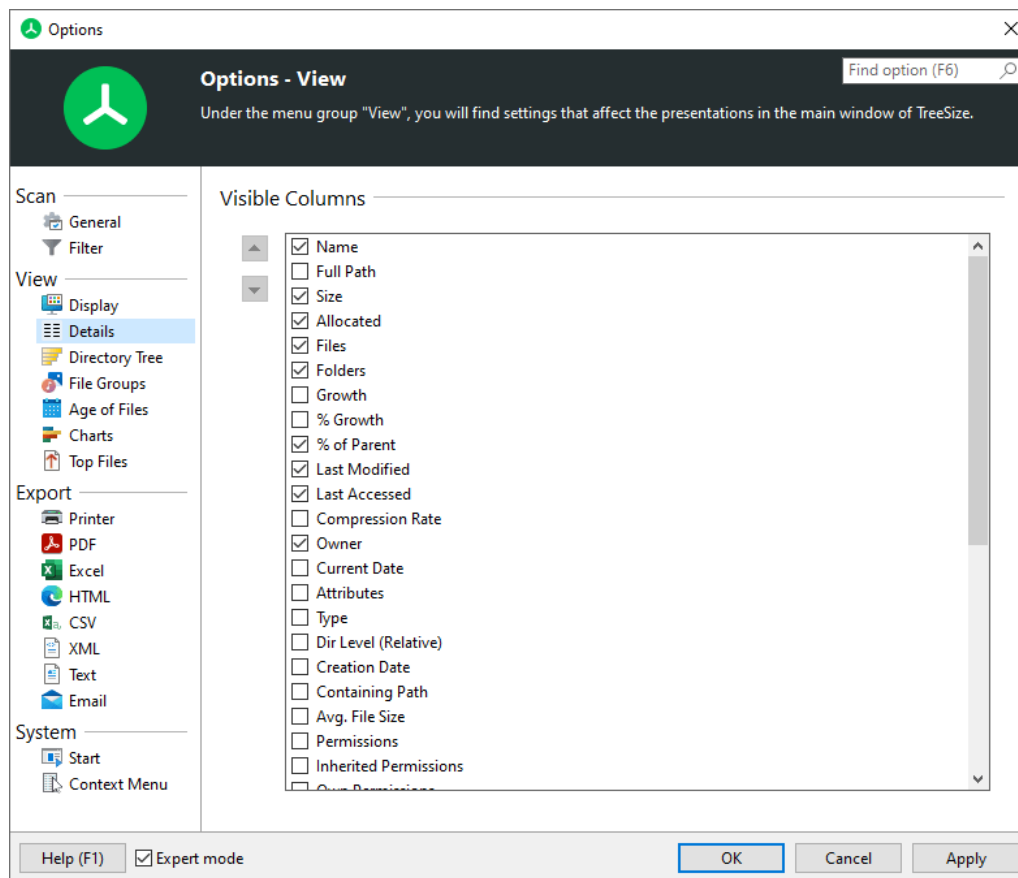


Notes

- You can change the ordering of columns using the arrows on the left. Click the desired column first, then click an arrow to move the column up/down.
- The column that should be visible in the Details view can also be configured by right-clicking the column header (see screenshot below).

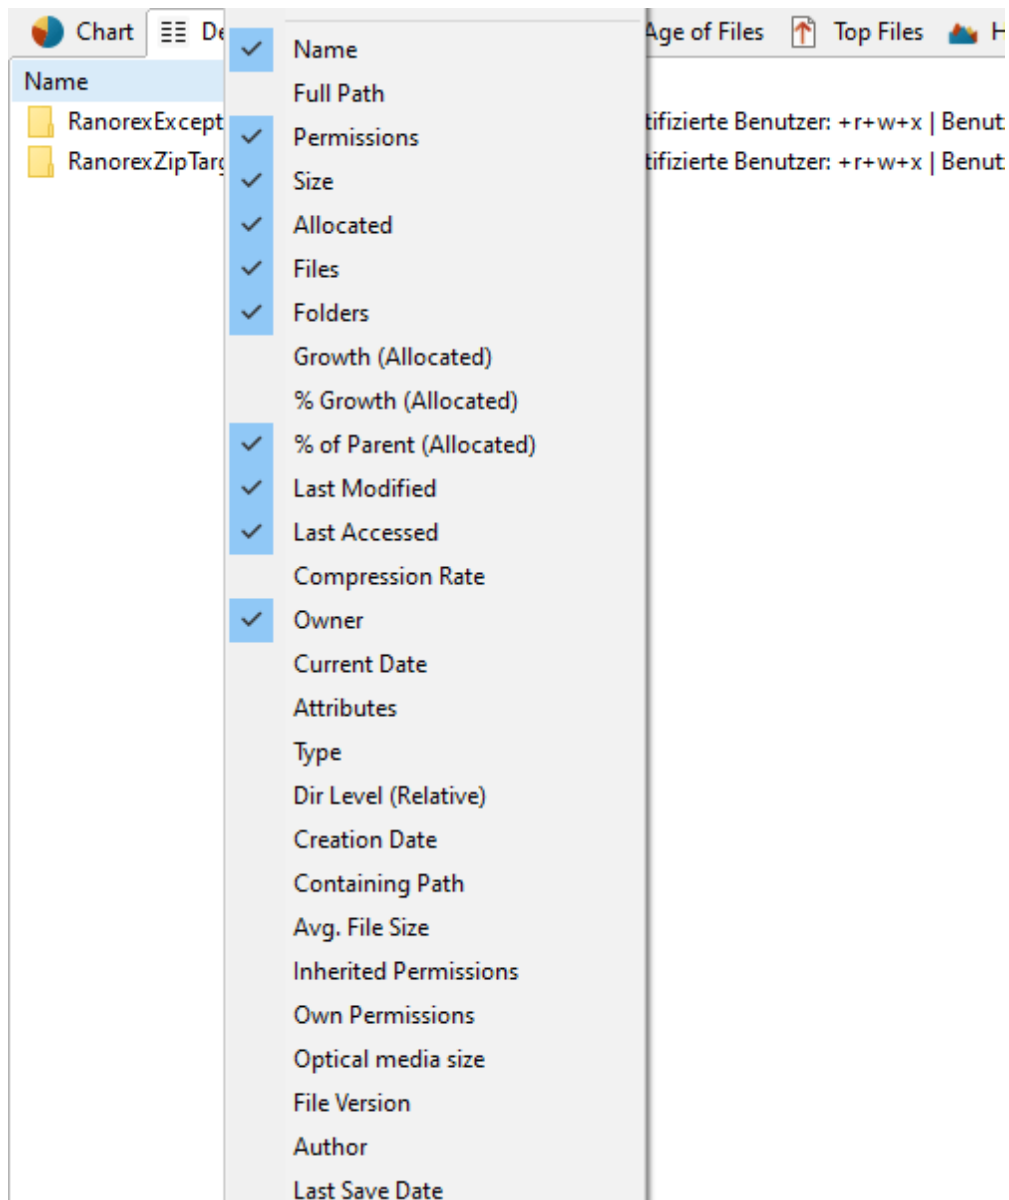

6.10.2.3 Directory Tree

Use these options to customize the appearance of the [Directory Tree](#)^[27] of TreeSize.

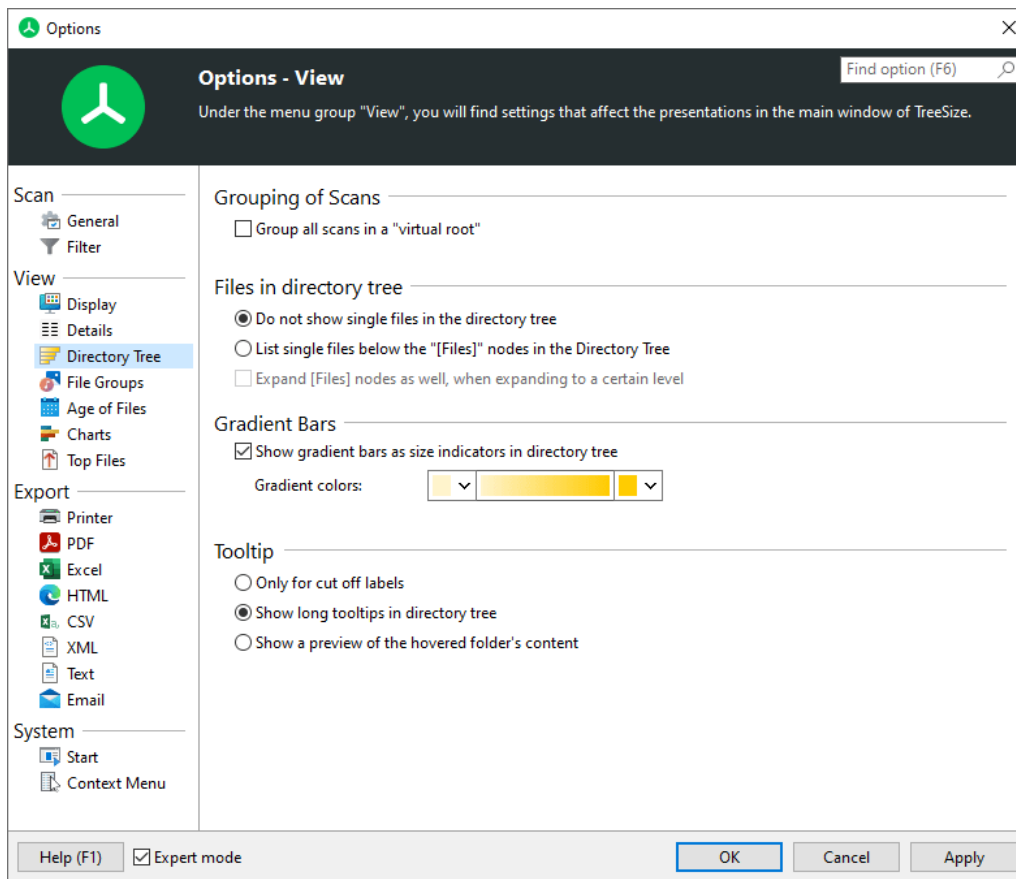

Grouping of Scans

Group all scans in a virtual root

Group scans under a virtual root folder showing summarized values for all scans that are part of this group.

Files in Directory Tree

Do not show single files in the Directory Tree

If this options is activated, files will grouped into a special node with the name "[Files]". This improves browsing of the directory tree, since you won't have to bother with individual files on each folder level.

Show single files in directory tree

If this option is activated, the directory tree will list single files.



Gradient Bars

Show gradient bars as size indicators in directory tree

If this option is active, a gradient bar is shown in the background of every folder in the directory tree that indicates the size of the folder in relation to the entire scanned file system tree. Use the color picker below to define a custom color gradient.

Tooltip

Only for cut off labels

Typically no tooltip is shown. In case the text does not entirely fit into a label, the full text will be shown as tooltip.

Show long tooltips in directory tree


If this option is active, a tooltip window with detailed information will be shown if the mouse cursor hovers over a folder for a while. This is useful if you want to take a look at detailed information of a folder without switching to the "Details" view,

Show a preview of the hovered folder's contents

Allows you to peek into a folder without actually expanding the folder in the directory tree.

6.10.2.4 File Groups

This page allows you to define which file extensions will be grouped together in the [Extensions view](#)^[42] of TreeSize.

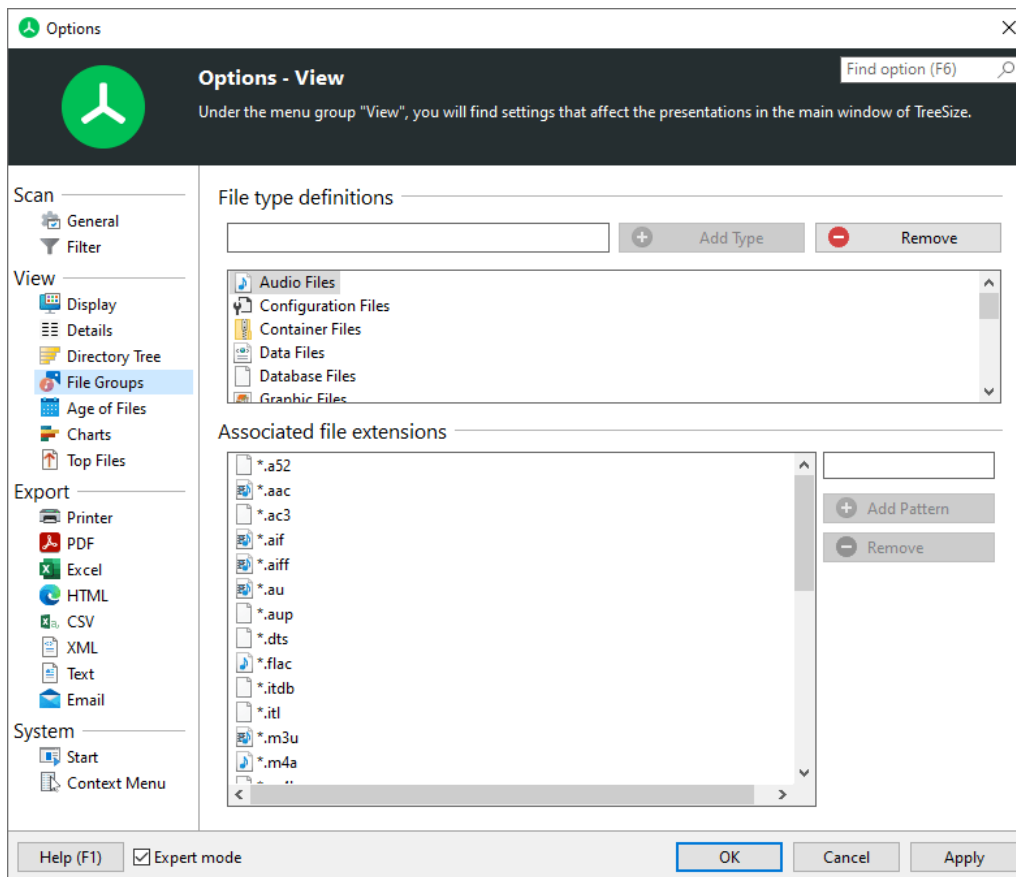

Adding a new group

1. Enter the name of the group (e.g. "Text files") in the "Group definitions" text field on top of the page.
The name is shown in the left column of the [Extensions view](#) ⁴².
2. Click "Add Group".
3. In the popup window, enter a meaningful description for the new group (e.g. "Plain text files, log files, etc.").
4. Click the text field in the "Associated file types" area and enter the desired file extensions (e.g. "*.txt").
5. Click "Add Pattern".
6. Repeat the step 4 and 5 until you have added all of the desired file extensions.
7. Click "Apply" to save the settings.

Add/remove/edit file extensions of an existing group

1. Click the desired file extensions group in the "Group definitions" on top of the page.
2. Add new file extensions like described in steps 4 and 5 above
or

use the "Remove" button on the right to remove an existing file extension from the list

or

right-click on an existing file extension and click "Edit Pattern" to change the pattern of an item.

3. Click "Apply" to save the settings.

Edit caption and description of an exiting group


Simply right-click on the desired group and select "Edit Caption" or "Edit Description".

Export/import list of file extensions

For existing groups, you can export the definition of file extensions by right-clicking on the "Associated file types" listing and selecting "Export". A text file containing one file extension in each line will be created. You can import a definition into an existing group in the same way.

6.10.2.5 Age of Files


This options page allows you to configure the intervals used to generate the charts of the [Age of Files](#) view.

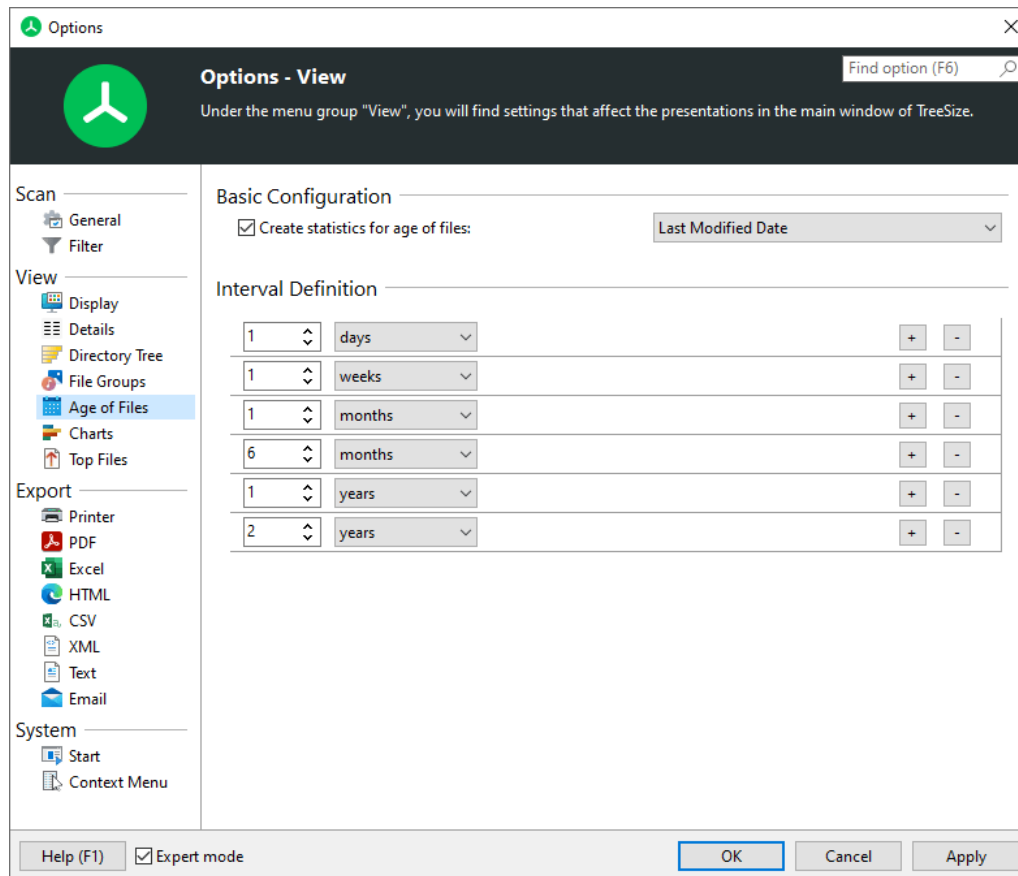

You may change the limit of each interval, add additional intervals using the '+' button, or remove intervals using the '-' button. You can turn off the creation of the "Age of Files" statistics using the check box on top of the list. This will slightly reduce the memory usage of TreeSize. Furthermore, you can select whether the file ages should be determined based on the "Last Access Date", the "Last Change Date" (default) or the file "Creation Date".

6.10.2.6 Charts

This section contains options that change the amount of information that is shown in the chart related views of TreeSize and the way that they are displayed.

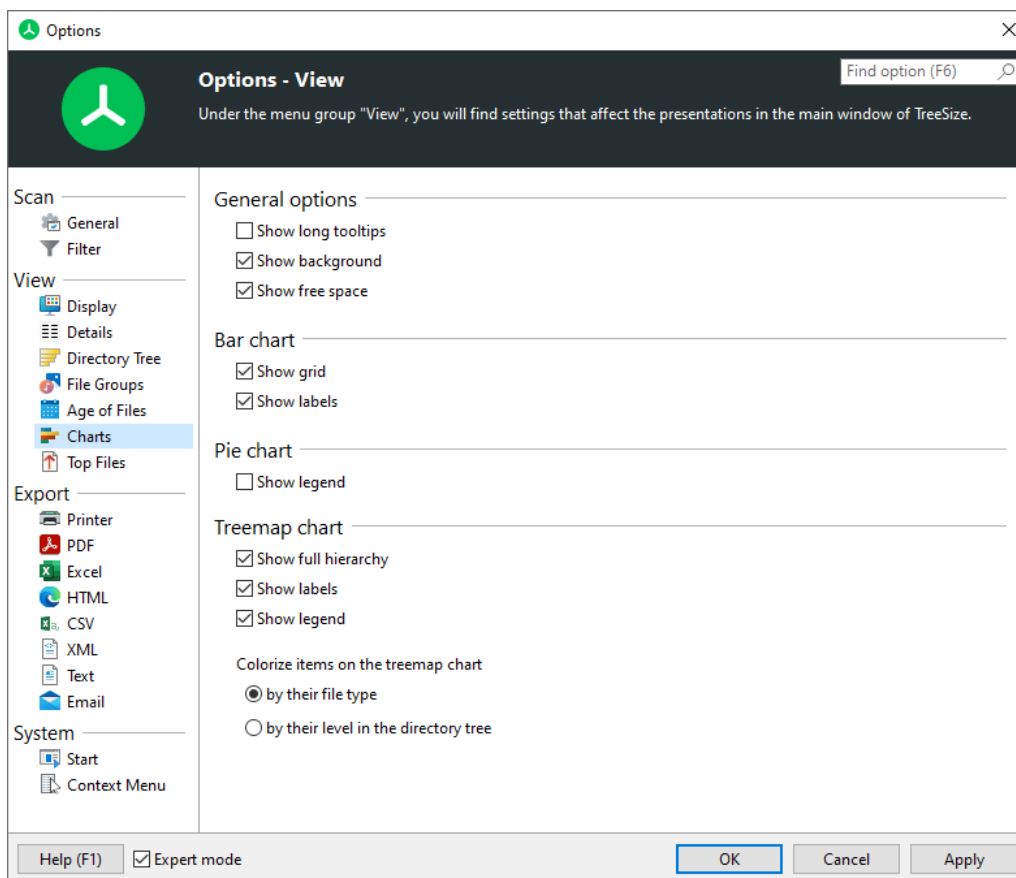

General Options

Show long tooltips

Activate this option to include additional tooltip information to the charts about the data that is currently being displayed.

Show background

Adds a color gradient to the background of the charts tab.

Show legend

Provides a description of the different segments that are included in a chart. The legend is shown below the chart.

Show free space

Includes a separate segment to the chart that indicates the amount of free space that is available on the drive that is currently being displayed.

Bar chart**Show grid**

Adds a grid to the chart that corresponds to the current segmentation on the x-axis on the chart.

Show labels

Additional labels for each segment that contain name and size information.

Pie chart**Show legend**

Provides a description of the different segments that are included in a chart. The legend is shown below the chart.

Treemap Chart**Show full hierarchy**

If activated, TreeSize will show the full directory structure when displaying the treemap chart. If deactivated, it will only show the deepest nesting of the hierarchy, which means that only files and folders without subfolders will be shown.

Show labels

These labels describe which file, or folder is currently being displayed in the different tiles of the treemap chart.

Show legend


Provides a description of the different segments that are included in a chart.

Colorize items of the treemap chart

This option allows to change how items are colorized in the treemap chart. You can either select to use different colors for different file types, or to highlight the level of a file within the file system with a corresponding color.

6.10.2.7 Top Files

This options page allows you to configure any options that apply to the [Top Files](#) ⁴⁷ view.

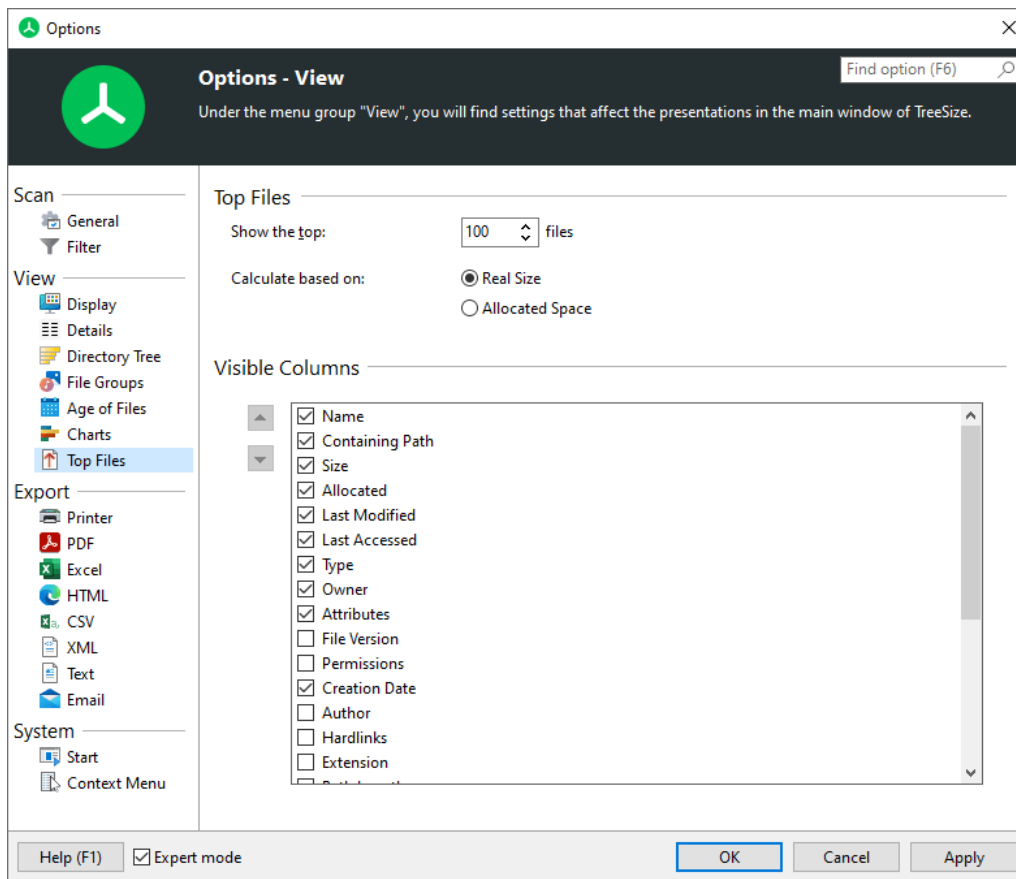

Top Files

By default, TreeSize will identify the 100 largest files within a scan and show them in a separate view. To adjust this number, or the way that these files are determined, change the appropriate option in this section.


Visible Columns

All [columns](#)³⁹ that are checked in this list will be shown in the top files list. By using the arrow buttons, you can also modify the order of columns that are displayed. You can also change them in the user interface directly, by right clicking the column header of the top files list and selecting the desired columns from the context menu.

6.10.3 Export

6.10.3.1 Printer

Configure printer settings for TreeSize.

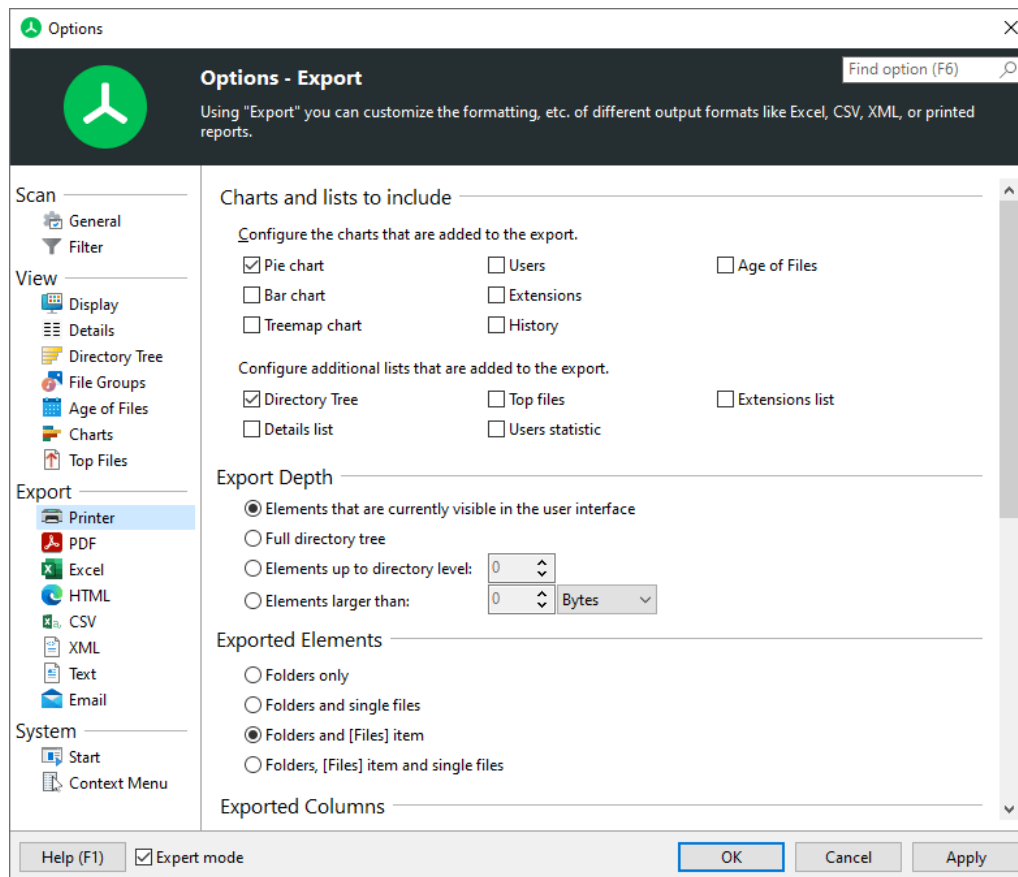

Charts and lists to include

Configure the charts and lists that are added to the export

Check all the different chart types and list types that shall be included in the report that will be printed.

Export Depth

Elements that are currently visible in the user interface

Only the expanded/visible parts of the [Directory Tree](#)²⁷⁾ will be printed.

Full directory tree

If this option is selected, the complete [Directory Tree](#)²⁷⁾ will be printed.

Elements up to directory level

Allows to restrict the amount of data that is printed to a certain level.

Elements larger than

Only elements that have a certain minimum size will be printed.

Exported Elements

Folders only

If this option is selected, only folders will be printed.

Folders and [Files] item

If this option is selected, single files will not be printed. Instead, their values such as "Size" and "Allocated" will be aggregated into a special node "[Files]".

Folders and single files

If activated, single files will be printed as well. This may result in very large reports compared to exporting the files in a grouped view (see option above).

Exported Columns

Use the column list to specify which information shall be included in printed reports. A list of all available columns with their descriptions can be found [here](#)³⁹.

Use same columns as in details view

Activate this option if you want to use the same columns that are currently used in the [details view](#)³⁶.

Use custom column settings

This option allows for a fully customizable selection of columns for this particular export. You can change the size for each column individually.

Formatting

Use bold text and colors for printed reports too

Turn this option on to apply the settings for bold folder names for printed reports.

Setup

Print Setup...

Opens a dialog that allows to select the default printer, as well as the size and orientation of the printed report.

Page Setup

Margin Left/Top/Right/Bottom


Change these margins to increase or decrease the spacing that is left near the edges of the report.

Page orientation

Use "Portrait" for a vertically aligned report, or "Landscape" for horizontal alignment.

6.10.3.2 PDF

Configure the PDF file report of TreeSize.

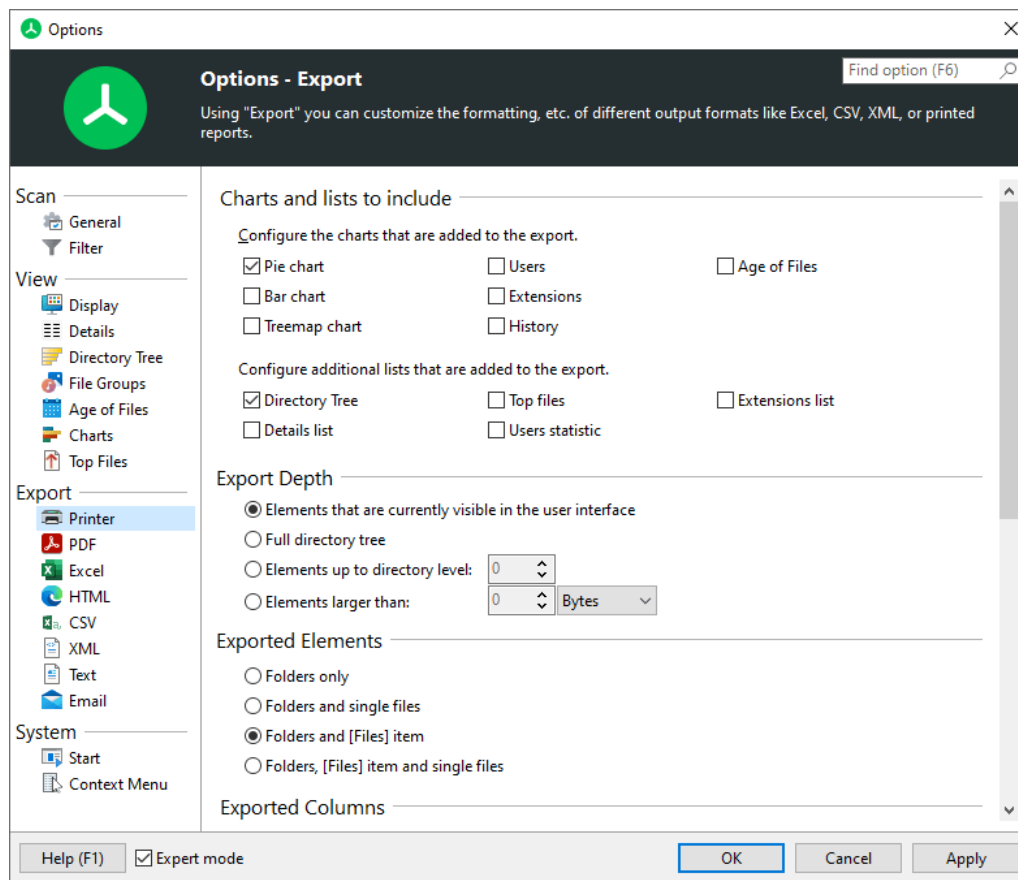

Charts and lists to include

Configure the charts and lists that are added to the export

Check all the different chart types and list types that shall be included in the report of this export type.

Export Depth

Elements that are currently visible in the user interface

Only the expanded/visible parts of the [Directory Tree](#)²⁷ will be exported.

Full directory tree

If this option is selected, the complete [Directory Tree](#)²⁷ will be exported.

Elements up to directory level

Allows to restrict the amount of data that is exported to a certain level.

Elements larger than

Only elements that have a certain minimum size will be exported.

Exported Elements

Folders only

If this option is selected, only folders will be exported.

Folders and [Files] item

If this option is selected, single files will not be exported. Instead, their values such as "Size" and "Allocated" will be aggregated into a special node "[Files]".

Folders and single files

If activated, single files will be exported as well. This may result in very large reports compared to exporting the files in a grouped view (see option above).

Exported Columns

Use the column list to specify which information shall be included in reports. A list of all available columns with their descriptions can be found [here](#)³⁹.

Use same columns as in details view

Activate this option if you want to use the same columns that are currently used in the [details view](#)³⁶.

Use custom column settings

This option allows for a fully customizable selection of columns for this particular export. You can change the size for each column individually.

Page Setup

Margin Left/Top/Right/Bottom


Change these margins to increase or decrease the spacing that is left near the edges of the report.

Page orientation

Use "Portrait" for a vertically aligned report, or "Landscape" for horizontal alignment.

6.10.3.3 Excel

Configure the Microsoft Excel file report of TreeSize.

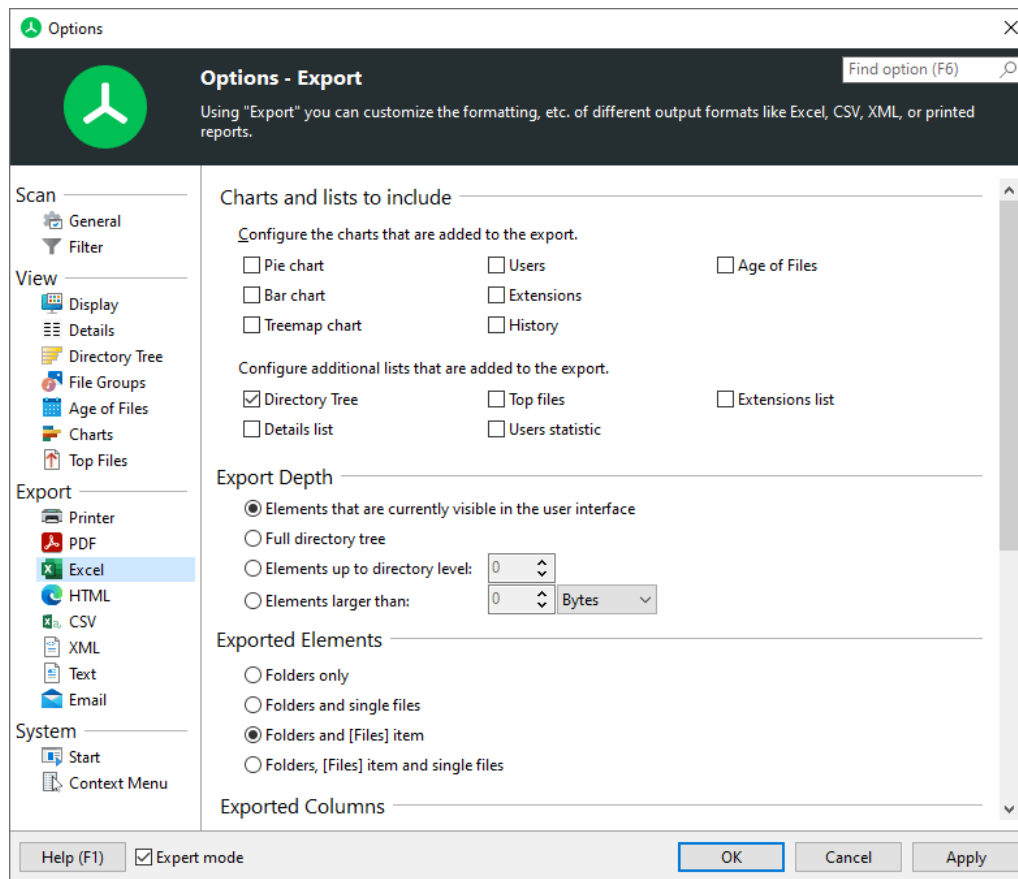

Charts and lists to include

Configure the charts and lists that are added to the export

Check all the different chart types and list types that shall be included in the report of this export type.

Export Depth

Elements that are currently visible in the user interface

Only the expanded/visible parts of the [Directory Tree](#)²⁷⁾ will be exported.

Full directory tree

If this option is selected, the complete [Directory Tree](#)²⁷⁾ will be exported.

Elements up to directory level

Allows to restrict the amount of data that is exported to a certain level.

Elements larger than

Only elements that have a certain minimum size will be exported.

Exported Elements

Folders only

If this option is selected, only folders will be exported.

Folders and [Files] item

If this option is selected, single files will not be exported. Instead, their values such as "Size" and "Allocated" will be aggregated into a special node "[Files]".

Folders and single files

If activated, single files will be exported as well. This may result in very large reports compared to exporting the files in a grouped view (see option above).

Exported Columns

Use the column list to specify which information shall be included in reports. A list of all available columns with their descriptions can be found [here](#)³⁹.

Use same columns as in details view

Activate this option if you want to use the same columns that are currently used in the [details view](#)³⁶.

Use custom column settings

This option allows for a fully customizable selection of columns for this particular export. You can change the size for each column individually.

Default Target File

Path of the default target file

Specify a file to which exported data should be written by default.

Formatting (Expert mode)

Use bold text and colors for reports too

Applies color and formatting options, such as bold text for larger folders, to generated reports as well.

Generate expandable/collapsible Excel report


A dynamic Excel report will be created in which items such as folders can be expanded/collapsed just like in the Directory Tree.

Format file and folder paths as

Chose in which way the paths of files and folders should be formatted in the Excel report. Paths can be formatted either as plain text or as hyperlinks.

6.10.3.4 HTML

Configure the HTML file report of TreeSize.

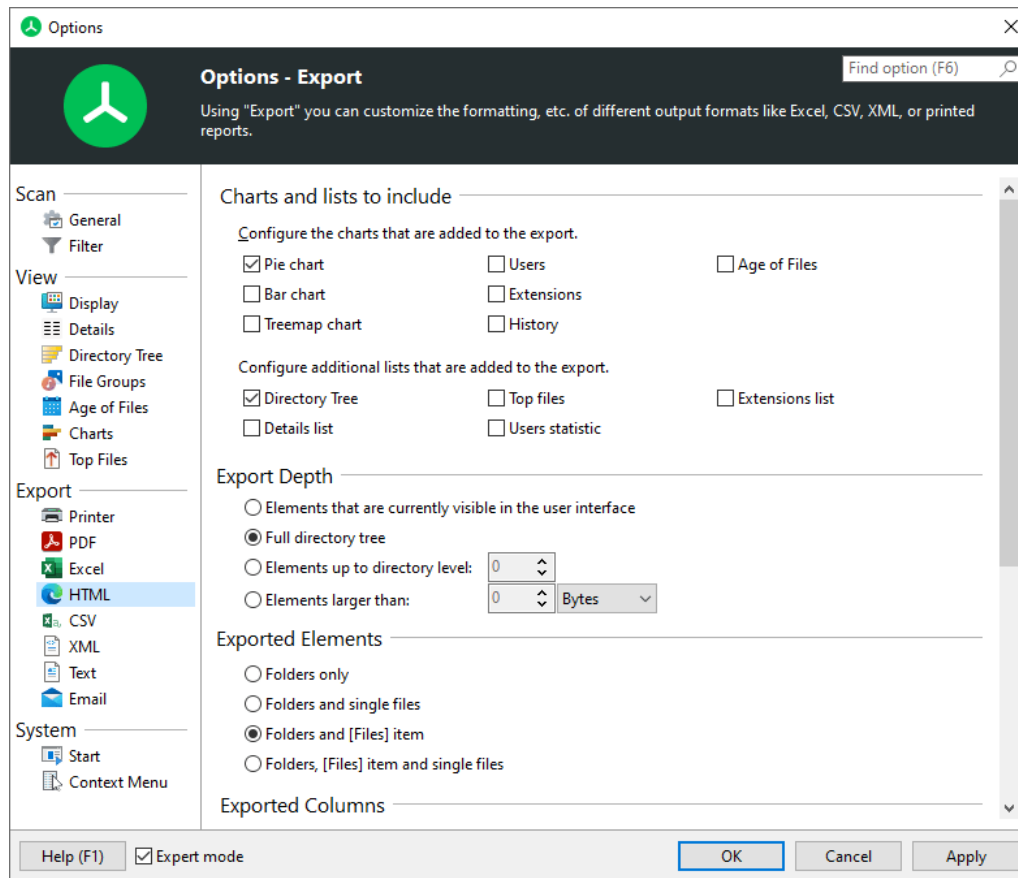

Charts and lists to include

Configure the charts and lists that are added to the HTML export

Check all the different chart types and list types that shall be included in the report of this export type.

Export Depth

Elements that are currently visible in the user interface

Only the expanded/visible parts of the [Directory Tree](#)²⁷ will be exported.

Full directory tree

If this option is selected, the complete [Directory Tree](#)²⁷ will be exported.

Elements up to directory level

Allows to restrict the amount of data that is exported to a certain level.

Elements larger than

Only elements that have a certain minimum size will be exported.

Exported Elements

Folders only

If this option is selected, only folders will be exported.

Folders and [Files] item

If this option is selected, single files will not be exported. Instead, their values such as "Size" and "Allocated" will be aggregated into a special node "[Files]".

Folders and single files

If activated, single files will be exported as well. This may result in very large reports compared to exporting the files in a grouped view (see option above).

Exported Columns

Use the column list to specify which information shall be included in reports. A list of all available columns with their descriptions can be found [here](#)³⁹.

Use same columns as in details view

Activate this option if you want to use the same columns that are currently used in the [details view](#)³⁶.

Use custom column settings

This option allows for a fully customizable selection of columns for this particular export. You can change the size for each column individually.

Included information

Include summary information

Use this option to specify whether a short summary information, such as the title and date of the report, should be added to the exported file.

Include units in export

If this options is activated, units like "KB", "MB", or "%" will be included in the exported data. Uncheck this option, if you want to export plain values.

Size unit

The size unit that will be used for the export of Excel files. You can either select a specific unit from Byte to Terabyte, let TreeSize automatically determine the optimal unit, or use the same unit that was last used in the user interface.

Style Sheet

Path of the optional style sheet

Define an optional style sheet which will be used to customize the created report.

Formatting (Expert mode)

Use bold text and colors for reports too


Applies color and formatting options, such as bold text for larger folders, to generated reports as well.

Format file and folder paths as

Chose in which way the paths of files and folders should be formatted in the Excel report. Paths can be formatted either as plain text or as hyperlinks.

6.10.3.5 CSV

Configure the CSV file report of TreeSize.

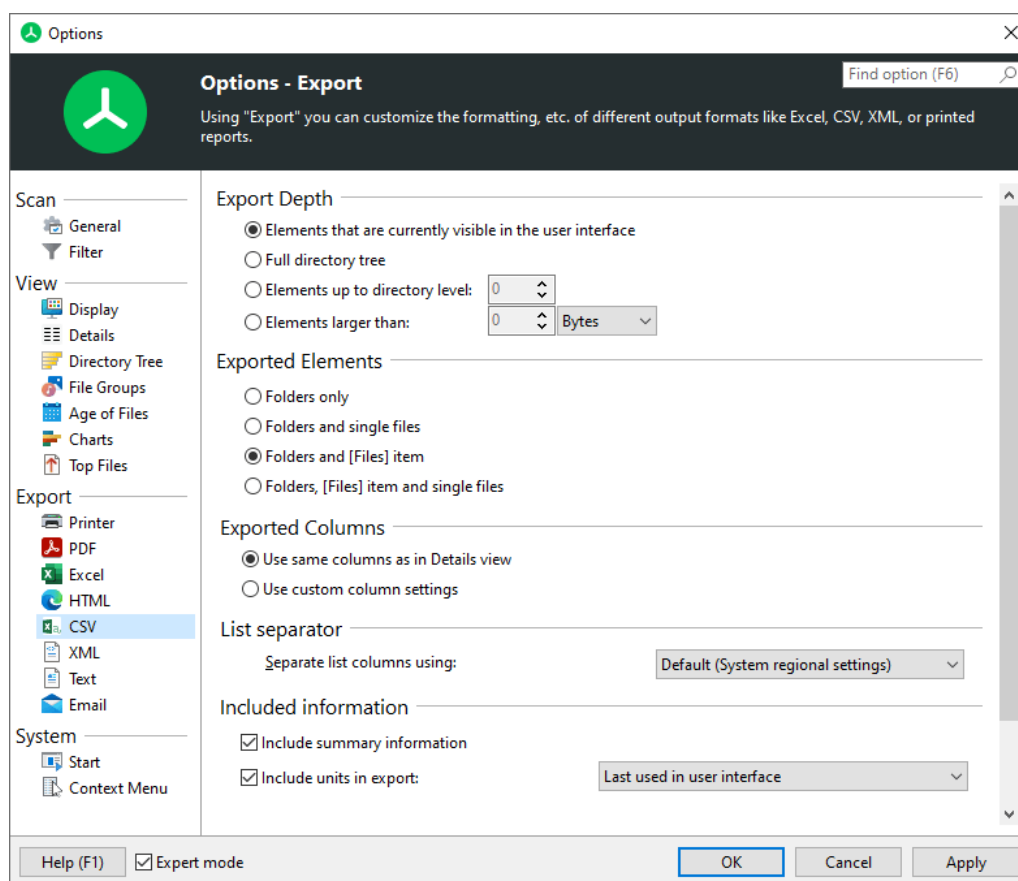

Export Depth

Elements that are currently visible in the user interface

Only the expanded/visible parts of the [Directory Tree](#)^[27] will be exported.

Full directory tree

If this option is selected, the complete [Directory Tree](#)^[27] will be exported.

Elements up to directory level

Allows to restrict the amount of data that is exported to a certain level.

Elements larger than

Only elements that have a certain minimum size will be exported.

Exported Elements

Folders only

If this option is selected, only folders will be exported.

Folders and [Files] item

If this option is selected, single files will not be exported. Instead, their values such as "Size" and "Allocated" will be aggregated into a special node "[Files]".

Folders and single files

If activated, single files will be exported as well. This may result in very large reports compared to exporting the files in a grouped view (see option above).

Exported Columns

Use the column list to specify which information shall be included in reports. A list of all available columns with their descriptions can be found [here](#)^[39].

Use same columns as in details view

Activate this option if you want to use the same columns that are currently used in the [details view](#)^[36].

Use custom column settings

This option allows for a fully customizable selection of columns for this particular export. You can change the size for each column individually.

Included information

Include summary information

Use this option to specify whether a short summary information, such as the title and date of the report, should be added to the exported file. For CSV exports, this will also define whether or not the name of the columns is included in the export.

Include units in export

If this options is activated, units like "KB", "MB", or "%" will be included in the exported data. Uncheck this option, if you want to export plain values.

Used size unit

The size unit that will be used for the export of CSV files. You can either select a specific unit from Byte to Terabyte, let TreeSize automatically determine the optimal unit, or use the same unit that was last used in the user interface.


List separator

Separate list columns using:

This options allows you to select which separator should be used for the export of CSV files. By default, the regional settings of the system will be used.

6.10.3.6 XML

Configure the XML file report of TreeSize.

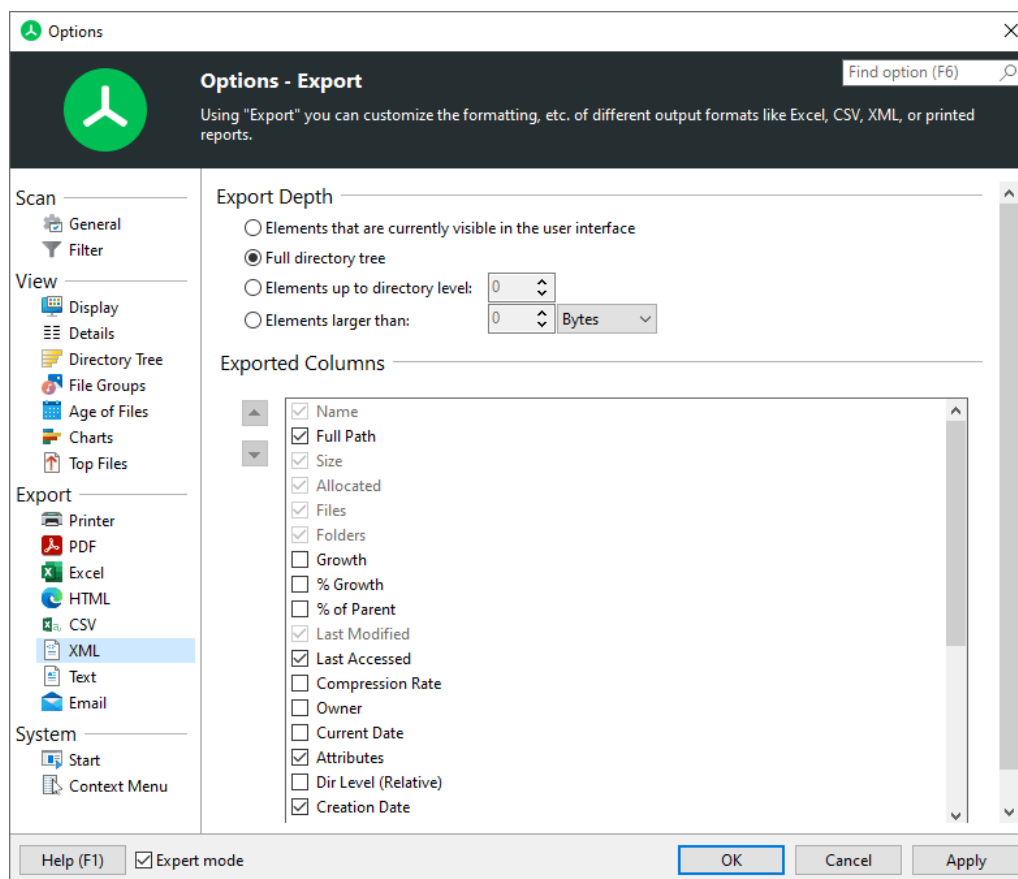

Please note:

- Certain columns cannot be configured for XML reports as these represent required data for the "Load XML report" or "Compare with XML report" features of TreeSize.

Export Depth

Elements that are currently visible in the user interface

Only the expanded/visible parts of the [Directory Tree](#)²⁷ will be exported.

Full directory tree

If this option is selected, the complete [Directory Tree](#)²⁷ will be exported.

Elements up to directory level

Allows to restrict the amount of data that is exported to a certain level.

Elements larger than


Only elements that have a certain minimum size will be exported.

Exported Columns

Use the column list to specify which information shall be included in XML exports. A list of all available columns with their descriptions can be found [here](#)³⁹.

6.10.3.7 Text

Configure the plain text file report of TreeSize.

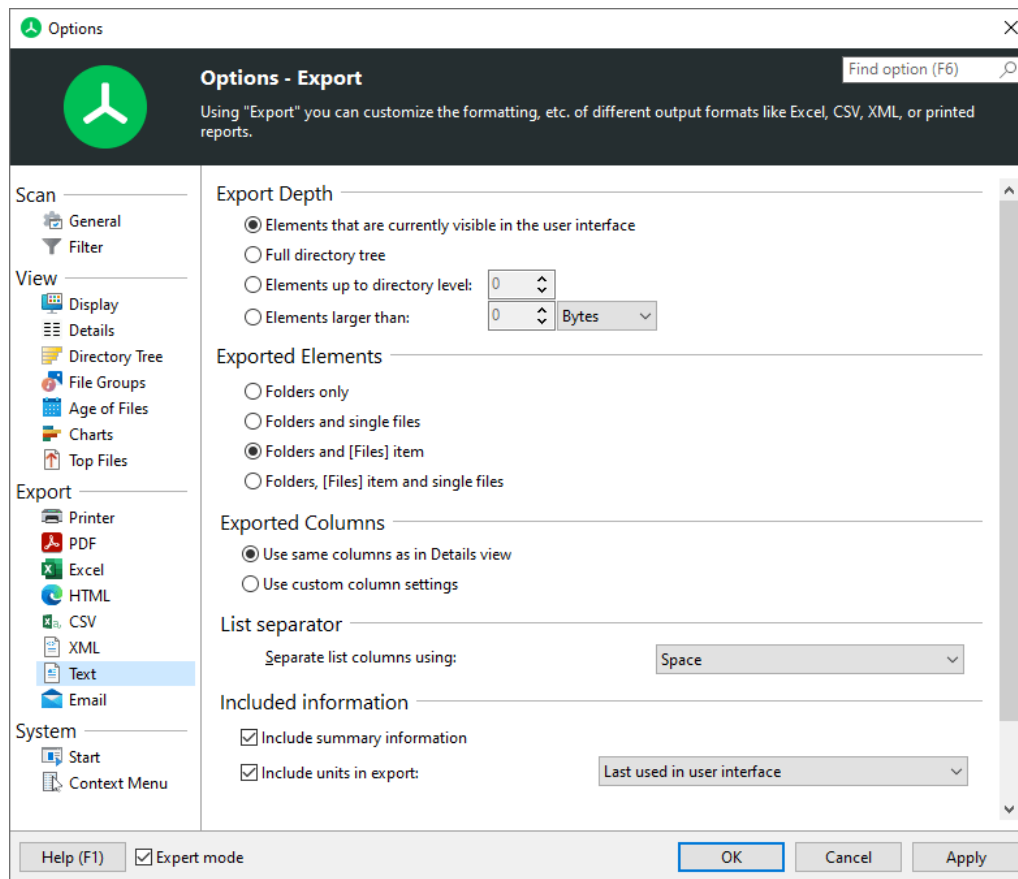

Please note:

- The "column" settings of the text export also affect the export to clipboard!

Export Depth

Elements that are currently visible in the user interface

Only the expanded/visible parts of the [Directory Tree](#)²⁷ will be exported.

Full directory tree

If this option is selected, the complete [Directory Tree](#)²⁷ will be exported.

Elements up to directory level

Allows to restrict the amount of data that is exported to a certain level.

Elements larger than

Only elements that have a certain minimum size will be exported.

Exported Elements

Folders only

If this option is selected, only folders will be exported.

Folders and [Files] item

If this option is selected, single files will not be exported. Instead, their values such as "Size" and "Allocated" will be aggregated into a special node "[Files]".

Folders and single files

If activated, single files will be exported as well. This may result in very large reports compared to exporting the files in a grouped view (see option above).

Exported Columns

Use the column list to specify which information shall be included in reports. A list of all available columns with their descriptions can be found [here](#)^[39].

Use same columns as in details view

Activate this option if you want to use the same columns that are currently used in the [details view](#)^[36].

Use custom column settings

This option allows for a fully customizable selection of columns for this particular export. You can change the size for each column individually.

Included information

Include summary information

Use this option to specify whether a short summary information, such as the title and date of the report, should be added to the exported file.

Include units in export

If this options is activated, units like "KB", "MB", or "%" will be included in the exported data. Uncheck this option, if you want to export plain values.

Used size unit

The size unit that will be used for the export of text files. You can either select a specific unit from Byte to Terabyte, let TreeSize automatically determine the optimal unit, or use the same unit that was last used in the user interface.

List separator

Separate list columns using:

This options allows you to select which separator should be used for the export of CSV files. By default, the regional settings of the system will be used.

6.10.3.8 Email

Configure email settings for TreeSize.

Options - Export

Using "Export" you can customize the formatting, etc. of different output formats like Excel, CSV, XML, or printed reports.

Scan

- General
- Filter

View

- Display
- Details
- Directory Tree
- File Groups
- Age of Files
- Charts
- Top Files

Export

- Printer
- PDF
- Excel
- HTML
- CSV
- XML
- Text
- Email**

System

- Start
- Context Menu

Email content

To: <Enter mail recipient (e.g. someone@example.com)>

Subject: Treecize Report

Format: HTML

Transport

☒ Use MAPI client

☐ Use SMTP server (required for scheduled tasks)

SMTP connection settings

From: <Enter mail sender (e.g. TreeSize@example.com)>

Server: <Enter Server Name or IP Address>

Port: 25 Default: 25 (SSL: 465)

☐ Use secure (SSL) connection

☐ This server requires authentication

Username:

Password:

Test Connection

Help (F1) ☒ Expert mode OK Cancel Apply

Email content

To

The email address the report will be sent to.

Subject

The subject of the email. Supports environment variables such as %DATE%, %TIME% or %USERNAME%.

Format

Choose an email format here.

Transport

Use MAPI client

If this setting is checked, TreeSize will use the local MAPI client (for example Microsoft Outlook) for sending mails.

Use SMTP server

TreeSize will use the specified SMTP server to send email reports. Please make sure to test the connection settings before applying the current options.

Please note that you will have to enter valid SMTP settings in order to make use of email reports in [scheduled scan or search tasks](#)^[148] or all other kinds of automated starts (e.g. batch programs or command line calls) (Professional Edition only).

From

The email address that will be shown as the sender of the report.

Server

The name (DNS) or IP address of the machine hosting the SMTP service through which messages are to be sent.

Port

The port on which the SMTP service specified in the "Server" field is listening for connections.

Use secure (SSL) connection

Indicates that Secure Sockets Layer (SSL) should be used when sending messages via SMTP.

This server requires authentication

Select this option if SMTP service specified by the Server field requires authentication. Passwords will be encrypted before storing them in the TreeSize settings file.

Test Connection

Test the SMTP connection settings. This will send a test email to the email address specified in the "To" field.

Email body**Include results in mail body**

Results will be added to the body of the email. NOTE: For very bigger reports, this can lead to very large mails, which can take a very long time to open in mail clients, or even exceed mail server limitations.

Attach a report with the results

Adds the result report as attachment to the email. This fixes the problem of very large emails that can occur with the other option.

Charts and lists to include**Configure the charts and lists that are added to the email export**

Check all the different chart types and list types that shall be included in the report that is send via email.

Export Depth

Elements that are currently visible in the user interface

Only the expanded/visible parts of the [Directory Tree](#)^[27] will be exported.

Full directory tree

If this option is selected, the complete [Directory Tree](#)^[27] will be exported.

Elements up to directory level

Allows to restrict the amount of data that is exported to a certain level.

Elements larger than

Only elements that have a certain minimum size will be exported.

Exported Elements

Folders only

If this option is selected, only folders will be exported.

Folders and [Files] item

If this option is selected, single files will not be exported. Instead, their values such as "Size" and "Allocated" will be aggregated into a special node "[Files]".

Folders and single files

If activated, single files will be exported as well. This may result in very large reports compared to exporting the files in a grouped view (see option above).

Exported Columns

Use the column list to specify which information shall be included in reports. A list of all available columns with their descriptions can be found [here](#)^[39].

Use same columns as in details view

Activate this option if you want to use the same columns that are currently used in the [details view](#)^[36].

Use custom column settings

This option allows for a fully customizable selection of columns for this particular export. You can change the size for each column individually.

Included information

Include summary information

Use this option to specify whether a short summary information, such as the title and date of the report, should be added to the exported file.

Include units in export

If this options is activated, units like "KB", "MB", or "%" will be included in the exported data. Uncheck this option, if you want to export plain values.

Size unit

The size unit that will be used for the export of Excel files. You can either select a specific unit from Byte to Terabyte, let TreeSize automatically determine the optimal unit, or use the same unit that was last used in the user interface.

Formatting (Expert mode)**Use bold text and colors for reports too**

Applies color and formatting options, such as bold text for larger folders, to generated reports as well.


Format file and folder paths as

Chose in which way the paths of files and folders should be formatted in the Excel report. Paths can be formatted either as plain text or as hyperlinks.

6.10.4 System

6.10.4.1 Start

Modify startup settings for TreeSize.

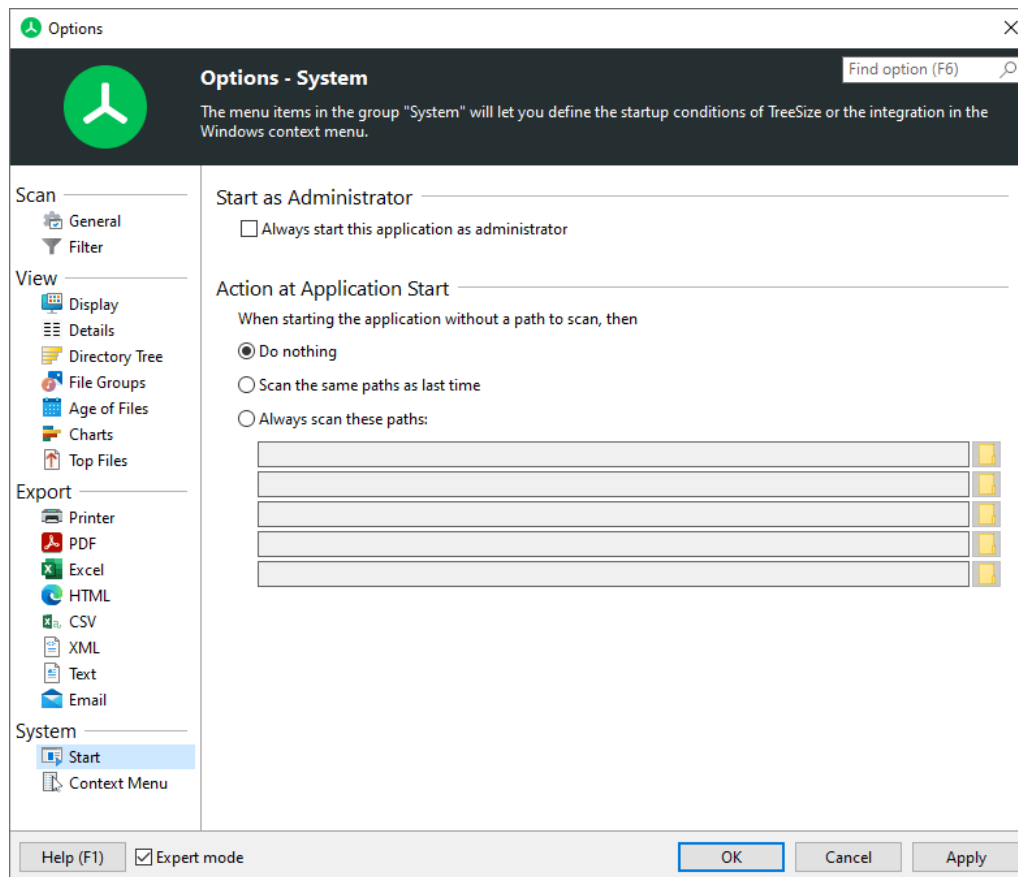

Start As Administrator

Always start this application as administrator

When activated, TreeSize will always start with administrator privileges. This will trigger the UAC (User Access Control) prompt, if UAC is enabled.

Action at Application Start

Do nothing

The application will start with an empty window. A scan can be started using the [path selection drop-down list](#)^[7] or via the corresponding button on the [Home](#)^[15] tab.

Scan the same path(s) as last time


All paths shown in the directory tree the last time TreeSize was closed will be re-scanned once the application is started again.

Always scan these paths

Enter up to five paths to be scanned when the application starts.

6.10.4.2 Context Menu

Configure the integration of the Windows Explorer context menu in TreeSize.

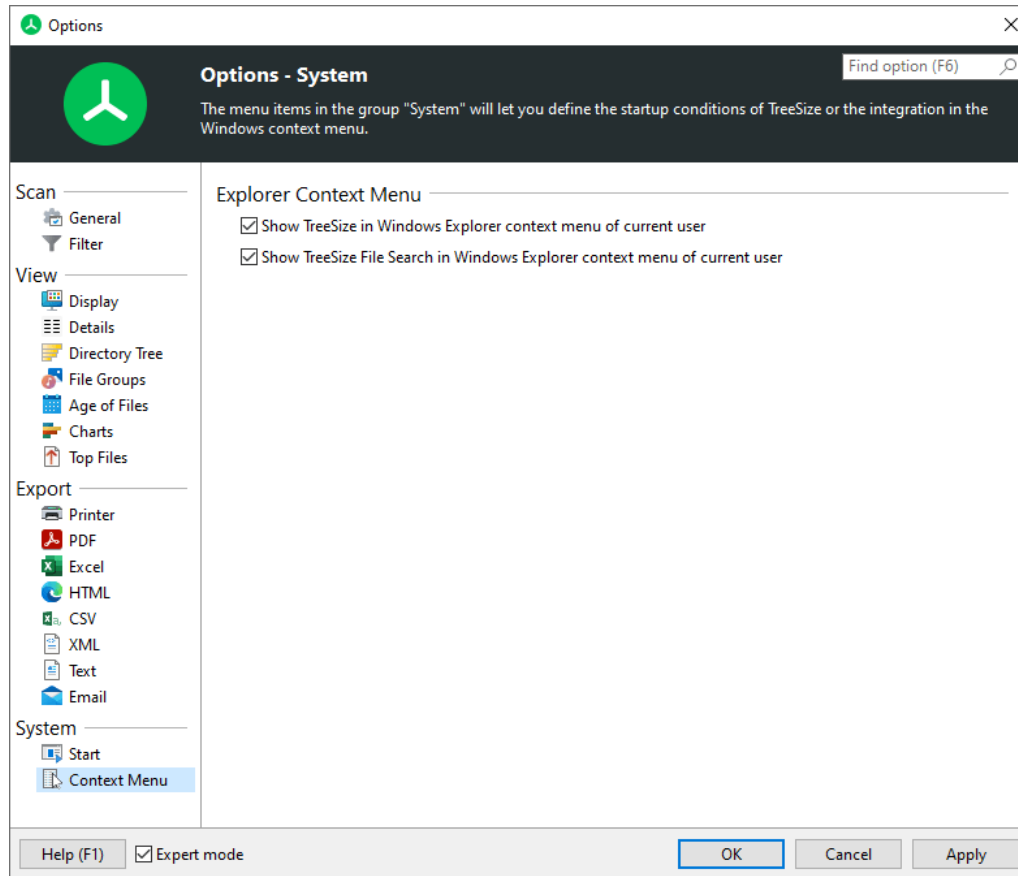

Explorer Context Menu

Show TreeSize in Windows Explorer context menu of current user

Select whether TreeSize should appear in the context menu of folders in the Windows Explorer. Click on the corresponding menu item to start TreeSize and scan the selected folder immediately.


Show TreeSize File Search in Windows Explorer context menu of current user

Select whether the TreeSize File Search should appear in the context menu of folders in the Windows Explorer.

7 Using the TreeSize File Search

The TreeSize File Search offers the ability to search for obsolete files or perform a highly customizable search. You can open the File Search via the Windows "Start" menu or the "Tools" ribbon tab in the main application.

Below, you can find the most important elements of the TreeSize File Search window:

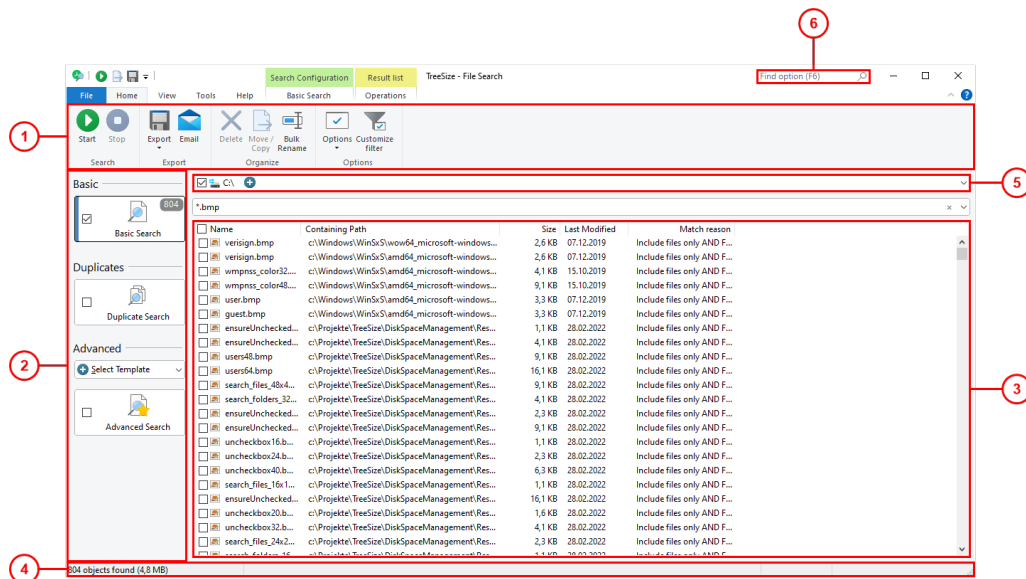

1 The [Ribbon Bar](#)^[99] provides access to all commands of the TreeSize File Search. It is divided into logical sections containing commonly used functions and elements (e.g. the "[Home](#)^[100]" tab), or the tabs enabling you to customize the appearance of the search results (e.g. the "[View](#)^[103]" tab). Press the "Start" button to start searching with the currently selected search options in the selected [drives and paths](#)^[106].

2 TreeSize offers the following file search types:

- [Basic Search](#)^[107]
- [Duplicate Files](#)^[112]
- [Advanced Search](#)^[118]

Use the check box to activate a certain search type. When a new search is started, all activated searches will be executed, after which the number of results will be displayed. After the search has been completed, select a search type (click on the caption) to show the search results of this search (See 3.).

3 In the center of the window, the result list of the search type you selected at 2. is shown. Files and folders that have been found, can be selected, or checkmarked here.

You can customize the amount of information shown by right-clicking the header of the list. This opens a context menu that provides a selection of predefined columns. Additional columns are available through a selection dialog ("More columns"). TreeSize supports all columns that are available in Windows Explorer.

A detailed description of the different columns can be found [here](#)^[39].

4 The status bar sums up information regarding the currently shown search results. Potential errors during the search, such as missing permissions, will be shown in this panel as well.

5 The [drive list panel](#)^[106] shows the currently selected drives and paths that will be used as starting point for the search. By clicking the dropdown

button, or the panel itself, you can open the full drive list and select or deselect additional search paths.

- 6 The "Find option"-searchbox (available with Windows 10 or later) allows to search for functions and settings with an ease and trigger them directly, or navigate to them.

7.1 The Ribbon Bar

The Ribbon Bar provides access to all commands of the TreeSize File Search. It is divided into the following logical sections, called "Tabs":

File ⁹⁹ Enables you to select folders to search in and load or save your search results and search options.


Home ¹⁰⁰ Contains the most commonly used actions and elements of the TreeSize File Search.

View ¹⁰³ Contains all actions and elements influencing the general appearance of the search results.

Tools ¹⁰⁴ Contains useful functions and settings of the file search.


Help ¹⁰⁵ Provides common help features, version information, and management functions for your product license

File

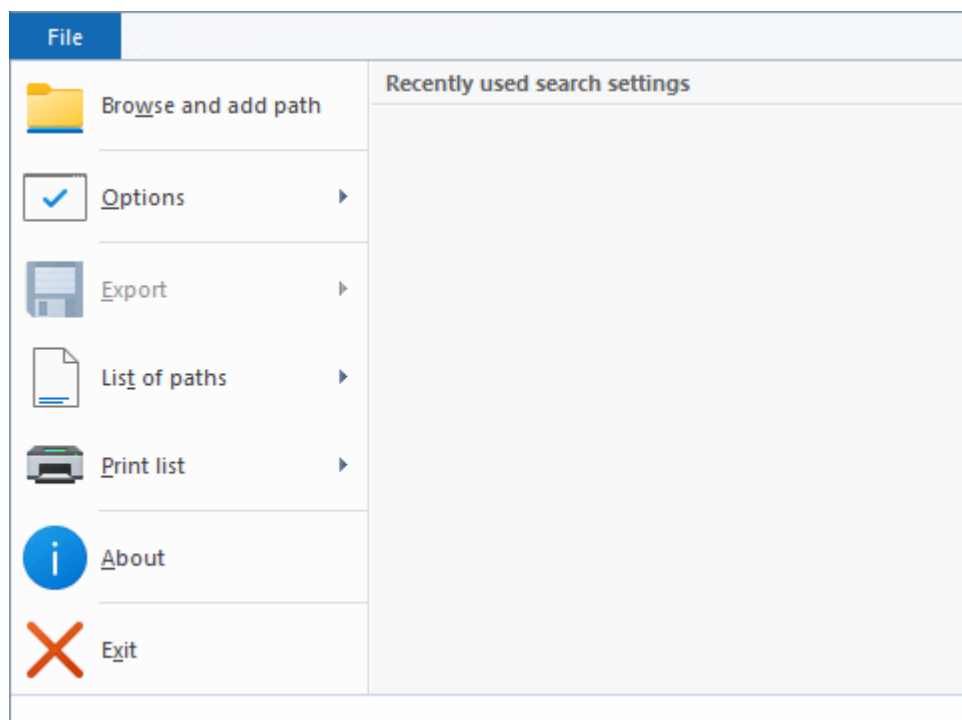

Browse and add path	Shows a dialog which lets you select a directory. The directory will be added to the list of drives and paths TreeSize will search in ¹⁰⁶ . Please note: Use "Home > Search paths" to see the complete list of searched drives and paths.
Search settings	Allows to Save the current search options to an XML file, load a previously exported options file, or to reset the current settings to their factory default.
Export	Saves the results of the latest search to a configurable file format. Available file formats are "Text files (.txt)", "CSV files (.csv)", "Microsoft Excel (.xlsx)", "Rich Text Format (.rtf)", "HTML (.html)", "PDF (.pdf)", and email.
List of paths	Exports a list of the full paths of your current search results ("Export path list") or import a list ("Import path list") in the format Text or CSV (mandatory).
Print list	Prints the currently visible result list or configure printer settings.
Options	Opens the options dialog ⁶⁰ , which allows to change the current search settings.
About	Shows version number and contact information.
Exit	Exits the TreeSize File Search.

Home



Search

Start	Starts the file search.
Stop	Stops the file search.
Export	Saves the results of the latest search to a configurable file format. Available file formats are "Text files (.txt)", "CSV files (.csv)", "Microsoft Excel (.xlsx)", "Rich Text Format (.rtf)", and "HTML (.html)", and "PDF (.pdf)".

You can also export a list of paths for the current search results. This list can be imported back into the file search at a later point in time, without having to perform a potentially long running search again. This also works for duplicate search, which will be exported including their group structure, if the option "General > Export > Export path list > [Include duplicate groups](#)^[142]" is enabled.

Email

Sends an email that contains the current search results.

Organize

Delete

Deletes all checked search results.

See "[File operations](#)^[130]".

Move/Copy

Moves all checked search results to a destination of your choice.

See "[File operations](#)^[130]".

Bulk rename

Opens the [renamer dialog](#)^[135], which allows to rename all checked items simultaneously, using different rulesets which determine the new name of the files and folders.

Search Options


Options

Opens the [options dialog](#)^[60], which allows to change the current search settings.

Customize filter

Allows to customize the set of [filters](#)^[139] that can be applied globally, to any of the search types.

Operations



Export

Export

Saves the results of the latest search to a configurable file format.

Available file formats are "Text files (.txt)", "CSV files (.csv)", "Microsoft Excel (.xlsx)", "Rich Text Format (.rtf)", and "HTML (.html)", and "PDF (.pdf)".

You can also export a list of paths for the current search results. This list can be imported back into the file search at a later point in time, without having to perform a potentially long running search again. This also works for duplicate search, which will be exported

including their group structure, if the option "General > Export > Export path list > [Include duplicate groups](#)^[142]" is enabled.

Email

Sends an email that contains the current search results.

Organize

Delete

Deletes all checked search results.

See "[File operations](#)^[130]".

Move
/Copy

Moves all checked search results to a destination of your choice.

See "[File operations](#)^[130]".

Deduplicate*

Use this button to replace all but one checked duplicate files by NTFS hardlinks. You can find further details about deduplicating files in [this](#)^[117] chapter.

Bulk
rename

Opens the [renamer dialog](#)^[135], which allows to rename all checked items simultaneously, using different rulesets which determine the new name of the files and folders.

Archive

Archives all checked search results in a ZIP file.

See "[File operations](#)^[130]".

Pass
to
executable

Passes the full path of all checked search results via command line to an executable of your choice.

See "[File operations](#)^[130]".

List
Actions

Check

Contains actions that allow to check multiple items in the active result list at once.

Uncheck

Contains actions that allow to uncheck multiple items in the active result list at once.

Invert
checkbox
states

Checked items will be unchecked and vice versa.

Remove

Through changes on the file system, such as the manual deletion of files via Windows Explorer, it may be possible that previously found duplicate search results have become invalid. This function checks

invalid elements all currently shown elements and removes those that cannot be found on the file system anymore.

Ensure one unchecked file per group* Activate this option, if you want to ensure that one file per duplicate group remains unchecked. This can be useful when using a custom selection mechanism, such as "Check if", to ensure that at least one of the duplicate files will not be included in a move or delete operation.

Edit

Cut Removes the selected items and copies them to the clipboard.


Copy Copies the selected files and folders to the clipboard. To insert them in a new location, use the "Paste" command.

Select all Selects all items in the list.

Invert selection A drop-down menu provides access to the additional button "Invert selection", which will invert the selection state of all search results.

*This action is only available if the duplicates search is currently selected on the left side of the main window.

View



Unit

Select the size unit, in which file sizes will be displayed:

- Auto** Automatically selects the optimal unit.
- TB** File sizes are displayed in Terabytes.
- GB** File sizes are displayed in Gigabytes.
- MB** File sizes are displayed in Megabytes.
- KB** File sizes are displayed in Kilobytes.
- B** File sizes are displayed in Bytes.

Formatting

Decimals

Determines the number of displayed decimals places.

Date and time

Chose the date format that is used in the TreeSize file search for columns like "Last Access", "Last Change", or "Creation Date" here. Available formats are date, date+time (without seconds), and date+time (with seconds).

Visible columns

Configure columns

Set the visible columns in the search result list.

This menu provides a large set of columns that can be enabled or disabled, as well as the option to activate one of the "additional columns" that are also available in Windows Explorer, such as "number of pages", for MS Word documents, width and height of pictures, and many more.

Please note: Before exporting scan results we recommend deactivating all columns you do not necessarily need in your export. This will increase the performance of the export and reduce the size of the export files.

Show or hide


Show tooltips

Enables long tool tips in the search result lists, showing detailed information about the file or directory your mouse cursor hovers over.

Preview pane

Toggles a panel to the right of the result list, showing a preview of the first currently selected file or directory.

Tools




Tools

Options

Opens the [options dialog](#)⁶⁰, which allows to change the current search settings.

Schedule current search	<p>Opens a dialog enabling you to create a scheduled Windows task for the current search options.</p> <p>The drop-down menu provides access to the additional button "Manage scheduled tasks", which allows you to edit previously created TreeSize tasks.</p> <p>See "Schedule Dialog"¹⁴⁹.</p>
Start as Administrator	<p>Restarts the TreeSize File Search and requests admin privileges.</p> <p>Please note: This button is available only if TreeSize was started without administrator privileges.</p>
Create portable installation	<p>Creates a portable instance of TreeSize on a removable device</p>
Empty recycle bin	<p>Deletes all items in the recycle bin to free up disk space.</p>

Help



Help

Show help	<p>Opens the "File Search"-specific help file.</p>
Show PDF manual	<p>Open the product manual as PDF (optimized for printing).</p>
File Search F.A.Q.	<p>Opens the "File Search"-specific F.A.Q. section in the help file.</p>

Version


About	<p>Provides information about TreeSize.</p>
Check for Update	<p>Checks for a newer version of TreeSize.</p>
What is new?	<p>Shows the changes that were introduced with each new version of TreeSize.</p>

License

Extend maintenance	<p>Extends the maintenance period. Updates and support are free within the selected maintenance</p>
--------------------	---

period.

Please Note: For the trial version of TreeSize, the Ribbon group "License" contains different controls:

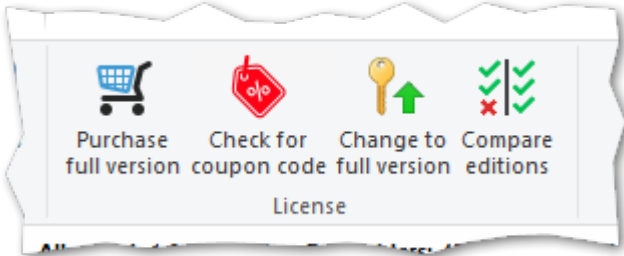


- Purchase full version** Navigates to the JAM Software website and shows a list of all available license models.
- Change to full version** Helps you switch to the full version after purchasing the software.

7.2 Defining search paths

Drives and Paths to search

The expandable drive overview enables you to define the drives and paths to search in. In its non-expanded state, it shows all searchable drives and paths that are selected for the current search. Additional paths can be browsed for, by using the plus symbol.

When expanded, the panel shows a list of all available drives, as well as the previously selected search paths, in a drop-down menu. Use the check boxes in front of each drive to select which file system branches should be searched by the file search. You can add additional paths and network drives using the buttons below the list. The first button will enable you to type in a path, the second one will open a folder browser dialog.

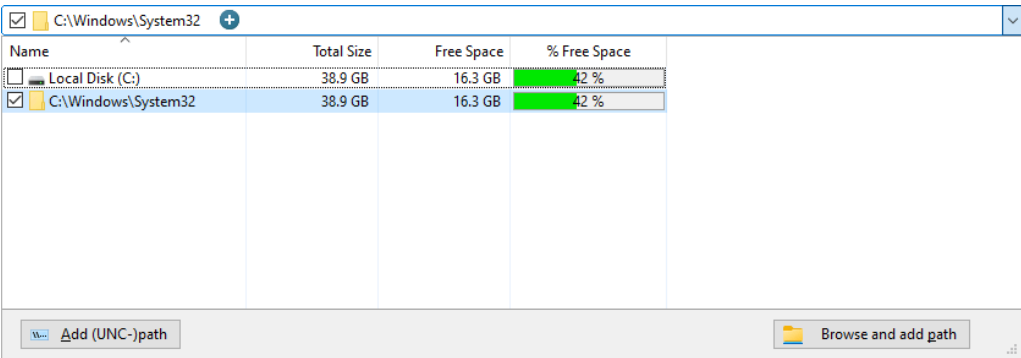


The file search supports the same [scan targets](#)²² as the main module of TreeSize, including WebDAV, Amazon S3, and SSH.

Hint: You can search entire servers or PCs by using their UNC name like \\\n\\SERVER. You can even search you entire network by choosing the network neighborhood of Windows in the directory browser appearing after pressing *Browse and Add Path*. TreeSize automatically browses for PCs and all shares on them (including hidden shares) and performs the search on all shares it finds.

7.3 Basic Search

The basic search provides a quick and simple entry to the file search. It is mainly aimed towards the more simple use cases, but offers a lot more functionality than what you can see at first glance. It is easy to use, since you can simply enter what you are looking for into the search box, similar to Windows Explorer's search. By default, the search will look for file names that match the user's input into the search box.

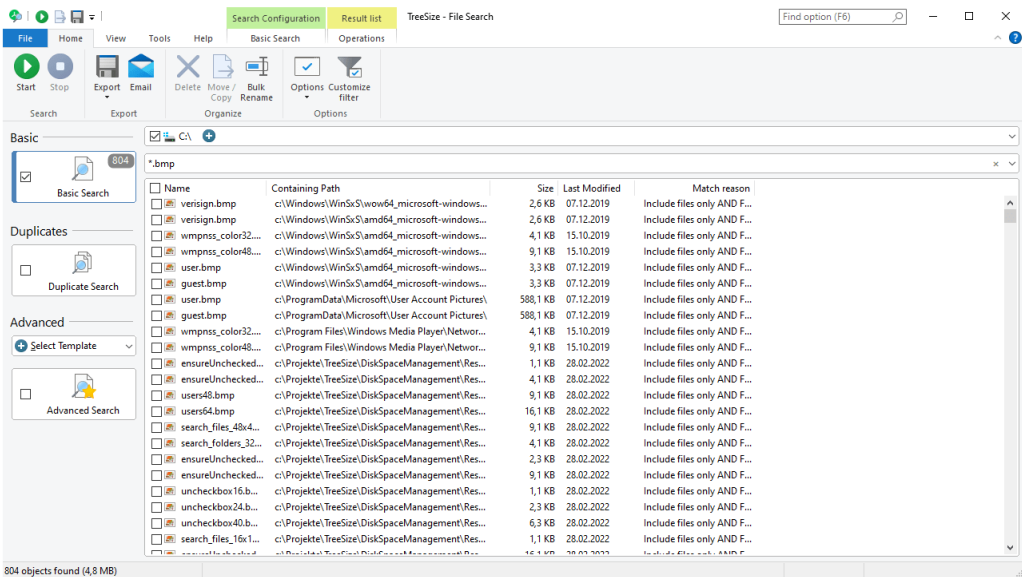

For power users:

The search box offers functionality that goes beyond the simple textual input of file names. You can customize your search even further by using our advanced [search syntax](#)¹⁰⁸. This allows power users to combine multiple search parameters by simply typing their configuration into the search box, without having to navigate the user interface.

Context tab: Basic Search

Search

Start

Starts the file search.

Stop	Stops the file search.
Options	
Customize File Type Groups	Opens the options dialog and navigates to the " File Groups ^[147] " options page. Here, you can modify the different file groups and which file types they should contain.
Exclude filter	Allows to activate, deactivate or customize the global exclude filters ^[139] for this search.
Include files/folders	Determines whether the current search should search for files, folders, or both.

7.3.1 Search Syntax

TreeSize provides a syntax that allows you to customize your search quickly and flexibly. Besides **file names**, certain keywords offer the possibility to search for **file extensions**, **file types** or **file contents**. Search terms can be combined via 'AND' or 'OR' and file names can be excluded from the search using the syntax. It is also possible to use **wildcards** and **regular expressions**. Below you will find a description of the permitted keywords and some use cases. For most keywords, there is a **abbreviated form** for faster search entry.

The search syntax is structured as follows:

<Property> <Operator> <Value>

for example

name: = readme

finds all files whose name (property) matches (operator) the word readme (value).

Several search terms can be combined:

name:=readme OR name:=movie

finds all files with 'readme' **OR** 'movie' in their name.

The following table shows all available properties, operators and conjunctions that you can use in TreeSize.

Information: When searching for file names, **name:** can be omitted. Regardless of this, the **=** character can generally be omitted as an operator. This property and this operator are the default values used in the search. There are abbreviated notations for individual properties, which can be found in the table below.

Property:	Description:	Example:	Abbreviated form:	Explanation:
name:	Search by file name . This is the default property that is used when no property is explicitly specified.	name: =readme	readme	Search for all files whose file name contains the word 'readme'.
extension:	Search by file extension .	extension: =txt	ext:txt	Search for all files with the file extension 'txt'.
type:	Search by file type .	type: =Video Files	type:Video Files	Search for all video files. Information: The available file types can be adjusted under 'Options > Configure file types'.
content:	Search by file content .	content: =license	cont:license	Full text search for all files, in whose file content the word 'license' occurs. Information: The full text search is time consuming. It is therefore recommended to use additional search criteria.

Operator:	Description:	Example:	Abbreviated form:	Explanation:
=	The property must apply . This is the default operator that is used if no operator is explicitly specified.	name: =readme	readme	Search for all files whose file name contains the word 'readme'.
!=	The property must not apply .	name:!=readme	!=readme	Search for all files that do not contain the word 'readme'.
~	Can be used in conjunction with the name: property. The following value is a	name:~[0-9]	~[0-9]	Search for all files that have at least one digit in their name.

Operator:	Description:	Example:	Abbreviated form:	Explanation:
	Regular Expression ¹⁸² and must apply the property.			
!~	Can be used in conjunction with the name: property. The following value is a Regular Expression ¹⁸² and must not apply to the property.	name: !~[0-9]	!~[0-9]	Search for all files that have no digits in their names.

Conjunction:	Description:	Example:	Abbreviated form:	Explanation:
AND	The conjunct search patterns must all match . This is the default connection that is used if no connection is explicitly specified.	name: =readme AND extension: =txt	readme ext:txt	Search for all files whose file name contains the word 'readme' and which have the file extension 'txt'.
OR	At least one of the related search patterns must match .	name: =readme OR name: =movie	readme OR movie	Search for all files whose file name contains the word 'readme' or 'movie'.

When specifying values, more precisely the actual search pattern, there are various reserved characters such as wildcards or quotation marks for exact searches. The following table lists these characters and explains them using some examples.

Example value:	Description:	Example:	Abbreviated form:	Results:
readme	Search for readme, where any number of characters can be placed before and after the word. The word contains	name: =*readme*	*readme*	Finds: '123readme.txt', '123readme.docx' but NOT: 'read_me.txt', 'reading.docx'


Example value:	Description:	Example:	Abbreviated form:	Results:
	'readme'.			
<code>readme</code>	Corresponds to <code>*readme*</code> . The two wildcards before and after the word can be omitted for simplicity.	<code>name: =readme</code>	<code>readme</code>	Finds: '123readme.txt', '123readme.docx' but NOT: 'read_me.txt', 'reading.docx'
<code>readme*</code>	Search for <code>readme</code> , where any number of characters can be placed after the word, but no characters are allowed before the word. The word begins with 'readme'.	<code>name: =readme*</code>	<code>readme*</code>	Finds: 'readme.txt', 'readme_c.docx' but NOT: '123readme.txt', 'read_me.txt'
<code>*readme</code>	Search for <code>readme</code> , where any number of characters can be placed before the word, but no characters are allowed after that. The word ends with 'readme'.	<code>name: =*readme</code>	<code>*readme</code>	Finds: '123readme', 'c_readme' but NOT: 'readme.txt', 'readme_c'
<code>"readme"</code>	Exact search for the word 'readme'. No characters are allowed before and after.	<code>name: ="readme"</code>	<code>"readme"</code>	Finds: 'readme' but NOT: 'readme.txt', '123readme'
<code>rea?me</code>	Search for file names beginning with 'rea' and ending with 'me' and containing exactly one character in between.	<code>name: =rea?me</code>	<code>rea?me</code>	Finds: 'readme', 'reame', 'rea1me' but NOT: 'rea123me', 'readme.txt'
<code>*readme*</code>	Search for files that contain the term "readme" anywhere in their path.	<code>name: =*readme*</code>	<code>*readme*</code>	Finds: "readme.txt" in any folder, "abc.doc" in "C:\temp\readme\local". but NOT: "abc.doc" in "C:\temp\local".

xt ein.

7.4 Duplicate files

Searches for duplicate files on the selected [drives or shares](#)¹⁰⁶. In this context, duplicate files are files which seem to exist more than once. Such redundant files increase the allocated space of your disks unnecessarily.

A detailed step by step example of how to use the duplicate search can be found [here](#)¹¹⁵.

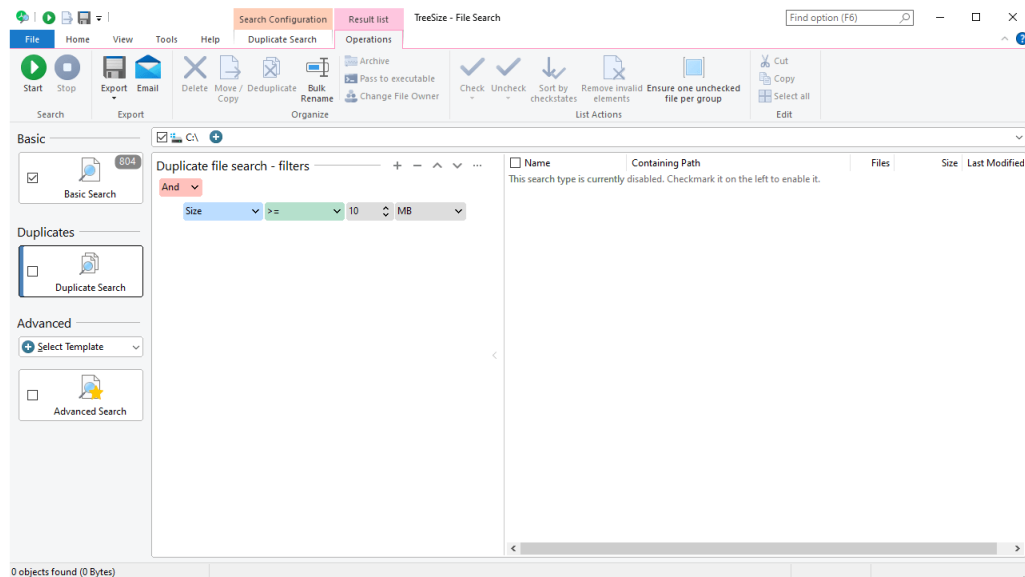

Context tab: Duplicate Files

Search Mode:

Select one of three modes of the duplicates search. You can search for duplicate files, duplicate folders, or files that do not have any duplicates.

Duplicate Files

Searches for files that are duplicates of each other, using the selected comparison method.

Duplicate Folders

Searches for folders that are duplicates of each other. Two folders are considered duplicates, if they contain the same amount of subfolders and files. These subfolders and files also have to be equal to each other, in regards to the selected comparison method.

Unique Files

This setting searches for files that do **not** have any duplicates across the

selected search paths.

Comparison method:

Defines which criteria should be used to identify files as duplicates. Here is a list of the available strategies:

MD5 Checksum

When using MD5 checksums, a so called hash value is calculated based on the contents of each file. Files with the same content will have the same hash value, files with different content will almost certainly have different values.

Empty files are ignored, since there is no content to compare.

This is more accurate than comparing files by their name, size and date but it is also much slower.

SHA256 Checksum

This search option works like the MD5 checksum mechanism, but uses the SHA256 algorithm instead of MD5.

While it is very unlikely that the MD5 hash algorithm produces the same hash value for different files, the SHA256 algorithm further reduces the statistical risk of such hash collisions. However, the SHA256 algorithm is significantly slower than MD5.

Size, Name and Date

Select this option to identify duplicate files by looking for equal names, sizes and last change dates.

This is much faster than using checksums to indicate duplicates, but it is also less accurate.

Name and Size

Select this option to identify duplicate files by looking for equal names and sizes.

Equal to the very first compare criteria, but without regarding the "last modified" time stamp of the files.

This is helpful in case files had been moved from one location to another, which might modify this time stamp.

Name	<p>Select this option to find all files with equal file names.</p> <p>This compare type can be helpful when you are searching for undesired copies (e.g. documents which have been copied and modified locally).</p>
Name without Extension	<p>Select this option to detect files with equal names, without regarding the file extension.</p> <p>This can be interesting in case you are searching for duplicated backup files or e.g. row-data and compact image or video files ("MyPhoto.bmp" - "MyPhoto.png").</p>
Size and Date	<p>Compares files according to their size and date values. This allows for a faster, but therefore less accurate search for duplicate files with different names. Accidental copies with names such as "Copy of ..." can be identified quickly, using this method.</p>
Size only	<p>Select this option to find all files with equal size.</p>

Search Filters:

Additional options to customize the duplicate file search:


Exclude filter	<p>Allows to activate, deactivate or customize the global exclude filters^[139] for this search.</p> <p>By restricting the duplicate search to a specific preselection of files, you can prevent listing files of certain directories (e.g. your local system directories) as duplicates. Additionally, this option will reduce the number of files to compare, which improves the speed of the search.</p>
Ignore NTFS hardlinks	<p>If this option is activated, hardlinks are not regarded as file duplicates. Note: NTFS hardlinks^[180] do not allocate memory. Therefore, deleting them does not make additional memory available. In addition, TreeSize uses hard links for deduplication^[117].</p>

Deduplicate:

Use the "[Operations > deduplicate](#)^[102]" button to replace all but one checked duplicate files by NTFS hardlinks. You can find further details about deduplicating files in [this](#)^[117] chapter.

In the configuration window you can select a log file to log the performed replacements to. You can also define how TreeSize will handle files located on different hard disks. You can either replace files located on the same hard disk with hardlinks separately or simply select a reference drive and replace all files located on other hard disks with [symbolic links](#)^[179]. Please note that in case the permission to create symbolic links can not be granted, a Windows shortcut (.LNK file) will be created instead as fallback.

The context menu of the duplicate files list offers a feature named "Replace duplicates by hardlinks". This function works just like the "Deduplicate" function, but will handle all selected files instead of checked files.

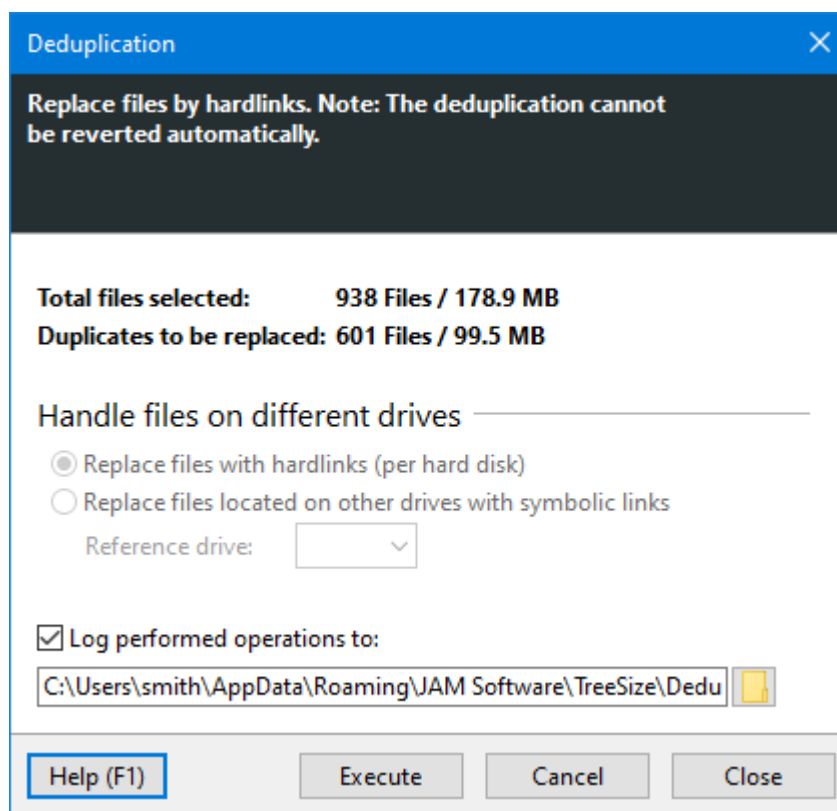

7.4.1 How to set up a duplicate search

The duplicate search is part of the TreeSize File Search, which can be started from the "[Home](#)^[15]" tab within the main module, or via the separate shortcut in your Windows Start menu.

Step 1: Activate the duplicate search and select a search path:

To set up a duplicates search, first enable the checkbox "Duplicate Files" on the left side. Use the panel above the search result list, to select the drive or path that you want to search. You can find additional information about how to set up a search path in [this](#)^[106] chapter. It is also possible to search for duplicates across multiple drives or paths.

Step 2: Select a comparison method and minimum file size:

The next step is to select the mechanism that should be used to compare files with each other. You can compare the files by their Name only, or a combination of Name, Size and Date. The most accurate method, however, is the checksum. A duplicate search that uses file checksums is slower, but will be much more accurate, since the actual content of the files is used for the calculation. To do this, select one of the available options from the ribbon menu, under "**Duplicate Files > Comparison Method**".

It is also recommended to define a minimum size for the search, so that small files can be skipped quickly. Smaller files do not contribute much to the total size on the drive, so their removal would not gain much space. You can also define other filters, such as ["File Type"](#)^[123] which can help speed up the duplicate search by running only on a specific subset of files. For more information, see the chapter ["How do I define search filters"](#)^[121].

Step 3: Run the search:

Once you have configured all necessary parameters, you can run the search and analyze the results. Each occurrence of a duplicate is arranged under a group in the result list.

The following screenshot shows an example configuration as mentioned above and shows the results of the search:

Name	Containing Path	Files	Size	Last Modified
FXSRES.DLL [multiple]		2	13.4 MB	6/12/2019
FXSRES.DLL	C:\Windows\System32\spool\drivers\x64\3\	1	6.7 MB	6/12/2019
FXSRES.DLL	C:\Windows\System32\DriverStore\FileRepositor...	1	6.7 MB	6/12/2019
{fd9a35aa-49...} [multiple]	C:\Windows\System32\config\TxR\	2	10.0 MB	10/9/2019
{fd9a35aa-...}	C:\Windows\System32\config\TxR\	1	5.0 MB	10/9/2019
{fd9a35aa-...}	C:\Windows\System32\config\TxR\	1	5.0 MB	10/9/2019
PrintConfig.dll [multiple]		2	6.8 MB	6/12/2019
PrintConfi...	C:\Windows\System32\spool\drivers\x64\3\	1	3.4 MB	6/12/2019
PrintConfi...	C:\Windows\System32\DriverStore\FileRepositor...	1	3.4 MB	6/12/2019
evbda.sys [multiple]		2	6.5 MB	3/19/2019
evbda.sys	C:\Windows\System32\drivers\	1	3.3 MB	3/19/2019
evbda.sys	C:\Windows\System32\DriverStore\FileRepositor...	1	3.3 MB	3/19/2019
PrintConfig.dll [multiple]		2	5.5 MB	6/12/2019
PrintConfi...	C:\Windows\System32\DriverStore\FileRepositor...	1	2.7 MB	6/12/2019
PrintConfi...	C:\Windows\System32\spool\drivers\W32X86\3\	1	2.7 MB	6/12/2019
cht4vx64.sys [multiple]		2	3.6 MB	3/19/2019
cht4vx64.sys	C:\Windows\System32\drivers\	1	1.8 MB	3/19/2019
cht4vx64.sys	C:\Windows\System32\DriverStore\FileRepositor...	1	1.8 MB	3/19/2019
WMALFXGFX... [multiple]		2	3.5 MB	3/19/2019
WMALFXG...	C:\Windows\System32\DriverStore\FileRepositor...	1	1.7 MB	3/19/2019
WMALFXG...	C:\Windows\System32\	1	1.7 MB	3/19/2019
winload.efi [multiple]		2	3.4 MB	[multiple]
winload.efi	C:\Windows\System32\	1	1.7 MB	10/9/2019

Step 4: Analyze the results and perform the cleanup operation:

Deduplicate:

The easiest way to gain disk space with the duplicate search is the [deduplication](#)^[117] feature. Just check the files that you want to deduplicate and select "Deduplicate" from the ribbon menu. TreeSize will replace all but the newest file with [NTFS hardlinks](#)^[180]. After the deduplication, the copies will no longer allocate space on the drive.

Delete/Archive:

Another way to free up space is to delete the duplicate files from the disk. In contrast to the deduplication, the duplicate files will be removed from disk completely, there will be no leftover link to the original data. This also requires you to manually select the files that should be removed. However, TreeSize offers a variety of functions that helps you select only the duplicate files, so that one "original" file will always remain.

In the ribbon menu for the duplicate search, you can find the category "List actions", which provides functionality for checking "All but the ..." newest, oldest, first or last file of each duplicate group. This allows you to select all files of a duplicate group but leave one file unchecked (the one file that will not be deleted). If you want to make a more customized selection, such as "only files from drive G:\", you can use the "Check if" dialog to create a custom selection pattern. To this end, it may also be useful to select "Ensure one unchecked file per group". If this option is enabled, TreeSize will ensure that one file per duplicate group remains unchecked under all circumstances. This prevents cases, where all files of a group were checked accidentally, so that no original file would be left over, after the delete operation.

After checking the files that should be deleted, click "Delete items" in the ribbon menu to trigger the [deletion dialog](#)^[130], where you can select what operation should be performed. You can either delete the files, or move them to a different location. In both cases, you can create a log file of the operation, which provides a summary of the operation and allows you to verify the results.


Finally, click "Execute" to start the operation.

7.4.2 How does the deduplication work?

Deduplicate:

The process of removing redundant files and replacing them by NTFS hardlinks with TreeSize is called "deduplication". This will reduce the disk space that is blocked by your duplicate files.

Instead of having each of the files take up individual space on your hard disk, TreeSize removes all duplicate files and keeps only one of them. The files that were removed will be replaced by hardlinks, which will then point to the remaining data (See: [NTFS hardlinks](#)^[180]). The data is now shared shared by all the hardlinks for this file, as shown in the image below.

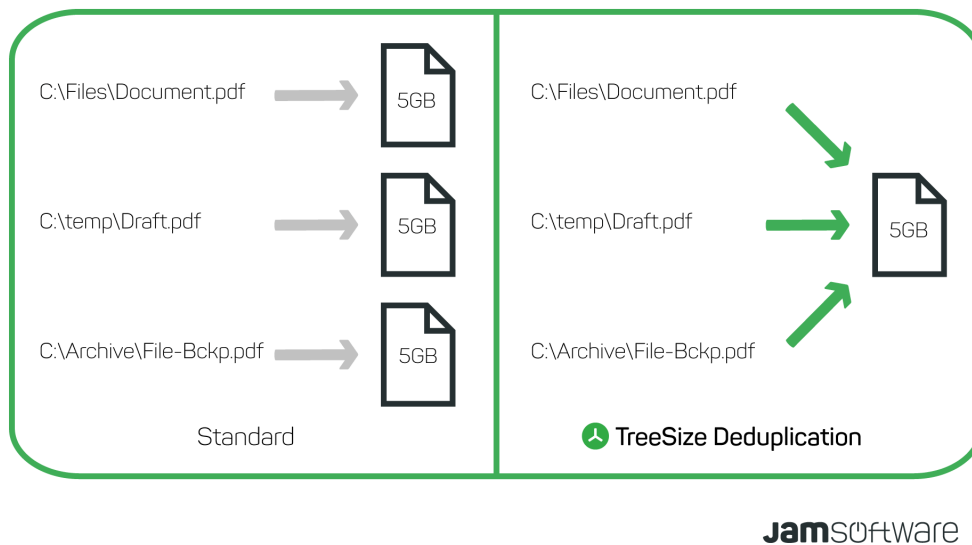

These hardlinks can be used like any normal file. You will not notice any difference, except that the data is now shared between the other links. In fact, they are not different to any normal file, except that they do not occupy their own space.

Please note:


- Unfortunately, Windows Explorer does not show the size difference for a deduplicated file, or the folder that it is located in. You can find further information about this topic and how to see the size difference in our [knowledge base](#).
- You cannot use hardlinks to replace files located on different hard drives.
- To use deduplication with hardlinks you need these **NTFS permissions** in all affected folders: Read permissions, write permissions, create files, delete files.
- TreeSize does not offer the functionality to "undo" a deduplication.
- All hardlinks pointing to the same file share the same "Security Description" (access permissions). Deduplication will apply a unified set of permissions to the one physical remaining file.

7.5 Advanced search

The advanced search is more customizable than any of the predefined searches. It can combine different filter patterns with date, size, or even attribute filters.

You can add multiple advanced searches and assign different search criteria to each of them. You can, for instance, create a custom search for audio files that

were are larger than a certain threshold, and another custom search for files with paths that exceed a length of 255 characters. Each of these searches can be activated and deactivated separately, so you can store a set of custom searches where each serves a different purpose. The ribbon menu can be used to create, rename, or delete custom searches, or to set up the general parameters of the current search.

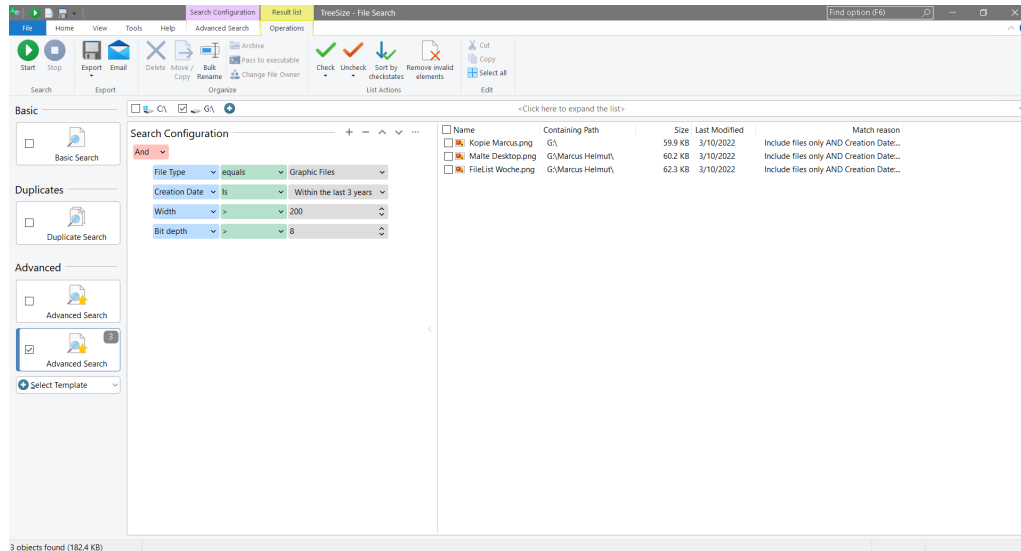

Select [Template](#)^[126]

This button on the left hand side of the application allows to select from a range of predefined search definitions. This list serves as an entry point for many different user cases, from which your search definition can be fully customized or extended.

Using the advanced search

A search configuration for the advanced search consists of one, or multiple search filters, which can be combined freely. You can, for instance, select whether a file has to match all filters (combine via "And"), or if only at least one of them (combine via "Or") has to match. A detailed description about how to create filter definitions can be found [here](#)^[121].

Analyze and process search results

Like in all searches, you can export checked files in the result list to a variety of formats, or you can copy or move them to a position in the file system that you can specify by using the [file operation](#)^[130] dialog. You can find a detailed description about how to analyze and process your search results in [this](#)^[128] chapter.

Context tab: Advanced Search

Search

Start

Starts the file search.

Stop

Stops the file search.

Manage

New advanced search

Creates a new, empty advanced search.

Rename current search

Allows to set a new name for the current advanced search.

Delete current search

Deletes the current search and all its filters.

Save current filters as templateCreates a new [template](#)^[126] from the current search filters and adds it to the list of available templates. All of the current filters and settings, such as "Include files/folders", are used, if the template is selected.

Options

Customize File Type GroupsOpens the options dialog and navigates to the "[File Groups](#)"^[147] options page. Here, you can modify the different file groups and which file types they should contain.**Exclude filter**Allows to activate, deactivate or customize the [global exclude filters](#)^[139] for this search.**Include files/folders**

Determines whether the current search should search for files, folders, or both.

Topmost matches only

If this option is activated, TreeSize will only show the highest possible level of files and folders as results for a search. This means, that if a file is found as a search result, but the parent folder is already contained in the list of results, then the file will not be listed. The same applies for subfolders where one of their parent folders is already contained in the list

of search results. NOTE: Activating this option will also activate the option to include folders.

7.5.1 How do I define search filters?

Defining a filter

In order to create a new filter, follow these steps:

1. Click "+"
2. In the first selection box, select **what** you want to search for:
 - Are you searching for files with a specific name? Select "**Name**"
 - Should a filter for file size be created? Select "**Size**"
 - Are you looking for files of a specific type? Select "**File Type**"
 - etc. (A variety of values to compare against are available. See also "[Which filters are there?](#)"^[123])
3. In the second field, select **how** the elements should be compared. A search for file names, for instance, can look for characters that are **contained** in the name, or whether it **starts** or **ends with** it. More complex comparisons can be performed with the option "matches pattern", or "matches regular expression". Examples for this are simple **wildcard patterns** such as "*.exe", or **regular expression** patterns such as ".+\\.exe\$". The opposite of a filter is also possible. You can search for files that **do not contain** a certain string. This can be used to exclude certain files from your search results.
4. Define the value of the filter. This value will be compared against the file name, size, etc.

Search Configuration — + — ^ v ...

And v

Name v	contains v	File123
Size v	> v	50 MB v
File Type v	does not equal v	System Files v

Combining multiple filters with each other

Multiple filters can be combined with each other as well. You can define multiple filters that will be applied one after the other, using the method that you have selected. You can fully customize whether filters will be combined via "Or" conjunction, or via "And" conjunction. The former means that **at least one** of the filters has to apply, the latter means that **all** of them must match. A filter

definition is always located below either an "And" or an "Or" node of the tree structure. This node defines how the underlying filters should be combined.

Tips for Powerusers: When combining multiple different filters, where part of them is to be combined via "Or", while others are to be combined via "And", it might seem a bit challenging to keep the overview, upon first use, since the arrangement in a tree structure does not match our usual reading direction. However, thanks to this compact and clearly structured representation, elements can be nested as deeply as desired, making complex combinations possible that can cover almost any use case.

Since elements that belong together share the same higher-level node in the tree, it is often advisable to read the structure from the inside out, i.e. first look at the leaf elements of the tree, and then the respective higher-level elements. The "Exclude system files" [template](#)^[119] shows an example of such a complex combination and is intended to provide an introduction to help you find your way around the definition of more complex filter definitions.

Using Wildcards

If you select the option "matches pattern" for a filter type, you can create a more complex filter, where certain parts of the search term are replaced by a placeholder.

- * Replaces none or arbitrarily many alphanumeric characters.
- ? Replaces exactly one alphanumeric character.

[Regular expressions](#)^[182] can also be used as patterns by selecting the comparison method "matches Regular Expression". The following table shows an example of possible patterns:

Name	matches pattern	*.doc	Searches for all files with the extension ".doc".
Name	matches Regular Expression	[^x00-x7F]	Find all files/folders with invalid ASCII characters.
Full Path	matches pattern	*\Windows\System32*.exe	Searches for all applications in the path "Windows\System32".
Name	matches Regular Expression	(?=.*a)(?=.*b)	Find all files/folders containing at least one "a" character and one "b" character.
Owner	matches pattern	admin*	Searches for all files with a file owner starting with "admin..." (e.g.

			"Administrator" or "Administrators")
--	--	--	---

7.5.2 What types of filters are available?

The TreeSize file search supports all kinds of filter variants for files and folders. In addition to standard filters, such as "Name" or "Size", there are many predefined filter options, some of which are described in this chapter.

File Type

This option allows you to search for groups of files. TreeSize offers predefined groups for all file types, such as "Audio Files", "System Files", or "Office Files and Documents". You can edit existing groups or create your own. You can find this option under "Start > Options > General > [Filegroups](#)^[147].

File Content

In addition to file name, fullpath, or owner, you can also search for files that have a specific content. The TreeSize File Search can analyze the textual content of a file and look for a given set of search terms. If TreeSize finds this text inside of a file, the file is returned by the custom search. This is possible for non-plain text file formats as well, such as PDF, Microsoft Excel or Microsoft Word.

Select "File content" as the target for the comparison, or the corresponding variant which is case-insensitive.

Plain text and IFilter

TreeSize is able to search plain text files very quickly, by traversing them directly on file system level and matching their content to the given search term. All commonly used file encodings, such as ASCII, Unicode, or UTF-8 are supported.

For more complex file types, such as Microsoft Word, Excel or PowerPoint, TreeSize uses the IFilter interface, which is provided by the operating system. Any application can register their own filter handler for a specific file type. Some handlers are already shipped alongside with Windows. An example for such a filter handler is the one that handles document types and allows to read the content of files that are saved in the .docx format.

Other file types, such as PDF, can be read by filter handlers that are installed by PDF reader

applications. They are registered during the installation of the PDF reader application and available for TreeSize automatically.

Path Length

You can use this option to search for files with paths of a certain length, which can help find long paths, for example. Many applications are limited to file paths with a maximum of 260 characters. This option can be used to find such problematic files.

Hardlinks

This option allows you to identify files that have already been deduplicated. A file with more than one hardlink indicates that a [deduplication](#)^[117] has already been performed. To include only files that have not yet been deduplicated, filter for files with exactly one hardlink. To include deduplicated files, select a filter with at least 2 hardlinks.

Files

Filters by the number of files in a directory

Folders

Filters by the number of sub folders in a directory

Dir Level

TreeSize will only search for files that are located within the specified minimum or maximum directory level.

Select "Dir Level (Relative)", if the directory level should be evaluated relative to the current [search path](#)^[106], rather than as absolute level within the file system.

For example:

Search path: "C:\Windows".

Using "Dir Level (relative)":

- Level 1: Items that are direct children of the current search path (e.g. C:\Windows\System32).
- Level 2: Items that are located inside of first level items (e.g. C:\Windows\System32\chkdsk.exe)
- etc.

Using "Dir Level":

- Level 1: Direct children of the current drive (e.g. "C:\file.txt").

- Level 2: Items that have one parent folder (e.g. "C:\Users\anotherfile.txt").
- etc.

In most cases, you will want to use "Dir Level (relative)". In order to skip subfolders and only search the current folder, select **"Dir Level (relative)" = 1**

Last Modified / Creation Date
/ Last Accessed

With this option, you can customize a search for files and folders by looking for their last change, last access, or creation date timestamps. Defining a time period can be done by:

Selecting a time interval (relative to the current date):

- Predefined interval: The most commonly used intervals, such as "Last week", "This month", "Last year", etc. are available as predefined options. They are evaluated in relation to the current date when the search is executed.
- Since X days/weeks/months/years: Select a custom time interval that must have passed since the file/folder was (not) changed / (not) accessed / (not) created.

Selecting a specific date manually:

- entering only a start date: the filters will only find files/folders with a matching date past the selected date. The selection menu provides checkboxes, which allow to enable, or disable the start and end date of an interval for the search.
- entering only an end date: the filters will only find files/folders with a matching date before the selected date.
- entering a full interval: the filters will find only files/folders with a matching date within these boundaries.

Attributes

Searches for file attributes. You can decide whether to have to be **set**, or **not set**.

Is invalid shortcut

Allows you to search for links without a valid destination. **Important:** Please note that a link with its destination being a currently


unreachable network drive can also be identified as invalid.

Meta data (Other)

In addition to the predefined set options what to look for, TreeSize allows to use any of the available meta data, such as "Last saved by" for office documents, or "tags" for JPG and Office files. Select **"Other"** to open a selection dialog with all available meta data .

7.6 Templates

Templates are a perfect starting point for creating a new [advanced Search](#)^[118].

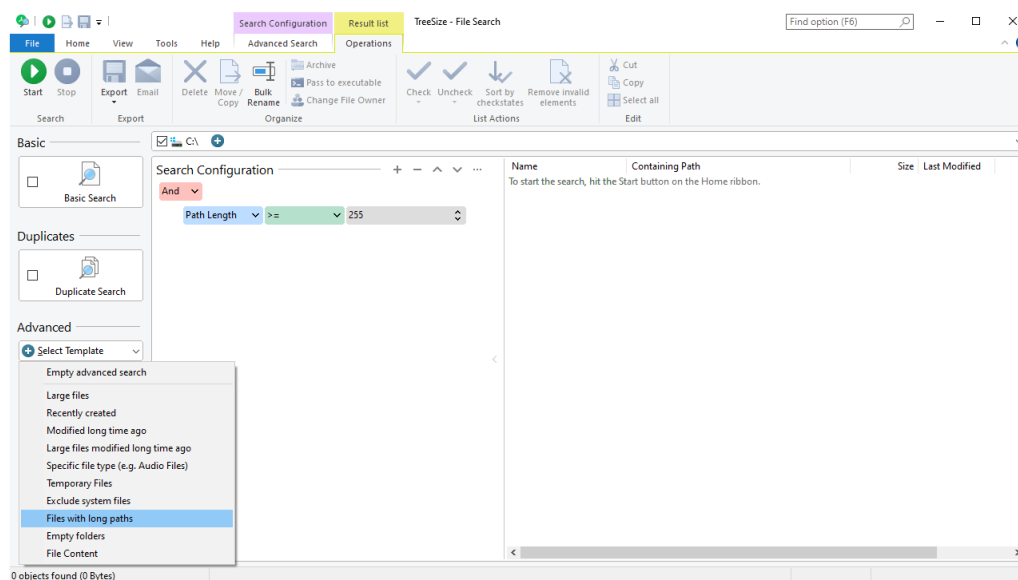

Defining a new search configuration should always start with the selection of a suitable template. Once a template that matches your use case is found and selected, TreeSize will add a new [advanced Search](#)^[118] with the name of the template and load a predefined configuration for this scenario into the user interface. From there, your definition can be adjusted to fit your requirements. You can add new filters, existing ones can be modified or removed. Selecting a template shall also help you find the correct filter types for your specific use case.

Create your own templates

To create your own templates, adjust the filter settings as you want them to be saved later in the template, and then select the ["Save current filters as template"](#)^[120] function in the "Advanced Search" tab. The new template is added to the list so that the previously selected search filters can be recalled at any time.

You can also edit the list of templates by removing existing templates or rearranging them as you like. Under "[Personalize > Templates](#)^[147]", in the options dialog, the list of existing templates can be customized as desired.

7.7 How do I exclude files from the search?

In some cases, it may be useful to exclude certain files, or a certain type of files, from your search results. An exclusion filter can help speed up the search for large amounts of data. If, for instance, certain subpaths are not relevant to a search, TreeSize can simply skip them. It is also possible to prevent certain data from appearing in the result set at all. An example of this is system files that should not be deleted or moved in most cases. In order not to display such files in the first place, a corresponding exclusion filter can be defined. There are two ways to create an exclude filter:

1. Using [global search filters](#)^[139]

The easiest way to exclude files from searching is to add them to the list of global search filters.

Global search filters, as the name suggests, can be defined for the entire application. Unlike the individual search definitions, they are valid for all searches, but can be turned on or off for each search separately. <%TITLE% automatically excludes all files and folders that correspond to the global search filters.

Global search filters can be activated and adjusted in the [options](#)^[137] dialog under "[Exclude filter](#)"^[139].

2. As part of the filter definition

You can also exclude certain files within the advanced search directly, using another filter. Suppose you already have an existing filter, for example, a minimum file size. This can be combined via the "And" conjunction with another filter, which excludes certain files (e.g. "System Files") from the search. The exclude filter in this example is defined as follows:

- Select "**File Type**" in the first selection box
- Select "**does not equal**" in the second selection box
- Select "**System Files**" in the third selection box

Make sure that the original filter and the exclusion filter are combined via "And", meaning that the two have a common parent that contains the "And" selection.

Search Configuration — + — ^ v ...

And v

Name v	contains v	File123
Size v	> v	50 MB v
File Type v	does not equal v	System Files v

Using this method, even more complex combinations can be created. For example, multiple inclusion filters might already be combined via "Or" (e.g. file name = "one file" OR file name = "another file"). To connect this existing combination with an exclusion filter, the complete "Or" group must be combined with the new exclusion filter with "And". The Exclude System Files template shows such an example, which searches for different file names but excludes system files at the same time.

7.8 What do I do with my search results?

After running a search, you might want to select a subset of your results and mark them for deletion/deduplication/etc.

Delete/Move/Deduplicate

Your search results can be processed in several different ways. Old files that are not needed anymore can be [moved or deleted](#)^[130], duplicate files can be [deduplicated](#)^[117], and files with invalid file names can be [renamed](#)^[135]. In order to do so, you need to use the checkboxes to select which files should be included in the operation. You can either select each file individually, or use one of the available options for selecting multiple files simultaneously.

Checking multiple files at once

TreeSize offers a variety of operations that allow to select a certain subset of your search results. Rather than having to scroll through very large lists with your results manually, you can use these functions to mark them automatically, using a set of predefined conditions, or by creating a custom one. The following list shows the different options that are available. They can be found in the under "[Operations > Check/Uncheck](#)"^[102].

All files and folders

The simplest of all options. Selects and checkmarks all of your search results.

Files and folders that match a custom filter

This option shows a custom filter dialog that offers the full range of [filter options](#)^[123]. You can select files by their name, path, size, or any other filter type that is available. You can find a

full description about how to define custom filters in [this](#)¹²¹ chapter.

Files and folders in

An option to quickly check all files that are located within the same folder as the currently selected file.

Files of type

Checks all files that have the same type as the currently selected one. This can be useful if you want to select all .pdf files, for instance.

NOTE: The same options are available as "Uncheck" operation, which removes checkstates from files that are checked.

Checking results in the Duplicates search

In addition to the options above, the duplicates search additionally offers a set of functions that are specific to selecting specific files from a group of duplicates.

In some cases you might want to mark duplicate files for a deletion. Therefore, you want to check all files of a duplicates group, except a specific one that should not be deleted. The following options allow you to do this in an easy and comprehensible way.

Duplicates of files in folder

With this function, you can select all files which have a corresponding duplicate that is located in the selected folder.

This function can be useful if you have files that were copied from one location to another, and you want to ensure that the file exists in location A, before it is deleted from location B.

Example:

A group of duplicates contains the following files:

```
D:\Files\Document.pdf
D:\temp\Copy_of_Document.pdf
C:\Archive\Document.pdf
```

If you select "Check duplicates of files in folder C:\\" The following files will be checked;

- ✓ D:\Files\Document.pdf
- ✓ D:\temp\Copy_of_Document.pdf
- C:\Archive\Document.pdf

If this group did not contain a file from drive C:\, nothing would be checked.

All but newest

All files except the newest one of a duplicates group will be checked. This can be useful if you want to delete all of the duplicates, except for the newest one.

All but oldest

All files except the oldest one of a duplicates group will be checked. This can be useful if you want to delete all of the duplicates, except for the oldest one.

All but first

All files except the first one of a duplicates group will be checked. This can be useful if you have sorted your duplicates in a certain way, so that the first item of each group should be kept.

All but last

All files except the first one of a duplicates group will be checked. This can be useful if you have sorted your duplicates in a certain way, so that the last item of each group should be kept.

NOTE: The "Uncheck" options allow you to achieve the same results, but for groups that already have all files checked. By using "Uncheck newest/oldest/first/last", you can uncheck one of the files per group, usually the one that is not supposed to be deleted.

7.9 File operations

This function enables you to move all checked files and folders in the search result lists to a destination of your choice, archive them in a ZIP file, delete them, or process the files. This function is accessible at "[Home > Move items](#)¹⁰²".

File Operation

Choose a destination and configure the options.

Total size of checked items: 179 MB
Number of checked items: 938

File Operation

☐ Delete items
☒ Move items
☐ Copy items
☐ Zip items
☐ Pass items to executable as parameter

Destination: C:\Users\smith\AppData\Local\Temp\ObsoleteFiles

Options

existing files
☐ Leave shortcut at original location pointing to new location
☐ Delete empty directories after the operation
☐ Preserve permissions of the original items
☒ Preserve directory structure, starting from level: 0
☐ Preserve timestamps of the original items

Logging

☐ Log performed operations to:
☐ Create Undo script (if possible):

Additional options enable you to configure the file system operations to suit your needs. In this section all available operations and options are listed and described.

File Operation:

Delete Items Deletes all marked files (a security prompt has to be confirmed). If the move option "Move to Recycle Bin" is

activated, the files will be moved to the Recycle Bin. Otherwise they will be deleted from the hard disk. **Attention:** Deletion without setting the corresponding check box cannot be undone without further notice.

- Move Items** Moves the selected files to the specified path. Optionally, a shortcut or a link can be created at the original location, each pointing to the new position of the moved object. If desired, the security attributes can also be copied. If this does not happen, the moved files inherit their security attributes (as usual) from the higher-level elements.
- Copy Items** Copies the selected files to the specified path. If desired, the security attributes can also be copied. If this does not happen, the moved files inherit their security attributes (as usual) from the higher-level elements.
- Zip items** Moves selected files to the specified ZIP archive.
Note: If ZIP files contain Unicode file or folder names, they can only be correctly extracted with a Unicode-compatible ZIP software such as WinRAR, WinZip or 7-Zip (see "[Unicode Zip files](#)"¹³⁴).
- Pass items to executable as parameter** An executable file will be called for every checked file and the full path of the file will be passed as parameter on the command line. The executable file may also be a batch, a PowerShell script or VBScript file (or something similar). The Windows Scripting [FileSystemObject](#) offers powerful and easy-to-use capabilities for file system and path operations. Please find an example for the use of a PowerShell Script below.

Options:

- Move to Recycle Bin (if available)** Here you can specify whether the selected items should be moved to the recycle bin or deleted directly from the hard disk.
Note: This option is only available for the "Delete" operation.
- Skip/Rename/Replace/Replace only older existing files** Configure how TreeSize will handle name collisions in the move destination, in case a file with the same name already exists. You can skip the existing files, replace them by the new one, or rename the existing files.
Please note: Only available for "Zip" and "Move to path" operation. Not supported when burning to an optical medium.
- Delete empty directories after the operation** Deletes all folders that have been emptied due to this move operation.

Preserve directory structure, starting from level x	<p>Use this option to configure the level of parent directories to preserve. The first x parent directories will not be included in the destination path.</p> <p>For example, when moving a file "C:\Users\Smith\My Document.doc" to destination "D:\Obsolete Files" you will get the following results:</p> <p>x = 0 > "D:\Obsolete Files\C\Users\Smith\My Document.doc"</p> <p>x = 1 > "D:\Obsolete Files\Users\Smith\My Document.doc"</p> <p>x = 2 > "D:\Obsolete Files\Smith\My Document.doc"</p> <p>Please note: Only available for "Move" and "Copy" operation.</p>
Keep original items after zipping	<p>Activate this option so that the original files are not deleted after copying to a zip file.</p> <p>Note: This option is only available for the "Zip" operation.</p>
Preserve permissions of the original items	<p>If this option is activated, the permissions of the original file will be used for the file in the new location.</p> <p>Please note: Only available for "Move" and "Copy" operation. Not supported when burning to an optical medium.</p>
Leave shortcut/link at original location pointing to new location	<p>If this option is activated, a shortcut or link will be created at the original location pointing to the location the file has been moved to. If you choose to leave a link and the files are on the same partition, an NTFS hardlink^[180] will be created. If the creation of a hardlink is not possible, a symbolic link is used (Windows Vista and later). If a symbolic link cannot be created, a Windows shortcut will be used as a fallback.</p> <p>Please note: Only available for "Move" operation.</p>
Logging:	
Log performed operations to:	<p>Produces a log file with a name of your choice under the path of your choice. Environment variables like %DATE% or %TIME% can be used in the file name.</p>
Create Undo script	<p>Creates a batch file which can be run after the operation was finished to undo the changes applied during this operation.</p> <p>Please note: Only available for "Move" and "Copy" operation. Not supported when burning to an optical medium.</p>

PowerShell Scripts using the example of SharePoint

We would like to show you in a practical example the use of a PowerShell script with the TreeSize File Search. The task is to prepare thousands of documents for uploading them to a **SharePoint** server. The problem is that certain characters are not allowed in filenames on SharePoint, that are valid in the normal file system and that are commonly used. Using a regular expression, which you can find in the chapter [Regular Expressions](#)^[182], it is easy to find all files that violate the SharePoint naming rules. When the search

is finished, please choose in the dialog to move the checked files to pass them to an executable. As executable please choose this PowerShell script, which you have previously save e.g. as "*SharePointRename.ps 1*":

```
Param([string]$filepath="")
[char[]]$illegal = "~", "#", "%", "&", "*", "{", "}", "\", ":", "<", ">",
"?", "/", "|"
$replacement = "-"
$filepathNew = [io.path]::GetFileName($filepath)
foreach($char in $illegal){$filepathNew = $filepathNew.Replace($char,
$replacement)}
Rename-Item $filepath $filepathNew
```

The script can be easily adapted or extended for further use cases.

Logging

Tip: Logging your move, archive, or delete operations provides an clarity and improves security for your system maintenance and is highly recommended.

The log produced by TreeSize shows all the necessary details to trace a maintenance act. The file will be saved in plain text format. A typical log file looks like this :

```
Starting file operation at 28.08.13 16:46.
Moving the following objects to "C:\Obsolete":
"D:\Data\BGInfo.bmp" => "C:\Obsolete\D\Data\BGInfo.bmp"
"D:\Data\readme.txt" => "C:\Obsolete\D\Data\readme.txt"
"D:\Data\Help\article.chm" => "C:\Obsolete\D\Data\Help\article.chm"
Finished file operation at 28.08.13 16:46.
Affected objects: 3 | Failed objects: 0 | Invalid objects: 0

Freed Space: 114170 Bytes (111 KB)
```

7.9.1 Unicode Zip files

TreeSize is able to zip files with file names including characters which are not part of your activated code page ([Unicode](#) file names). To restore this Unicode-decoded Zip files you will need an Zip tool able to handle Unicode encoding.

Here is a list of tools we have tested for Unicode compatibility:

- [WinRAR](#) (V3.8 or higher)
- [WinZip](#) (V11.2 or higher)
- [7-Zip](#) (V4.6 or higher)

- [PeaZip](#) (V5.1 or higher)
- [BitZipper](#) (V2013.13.4.16 or higher)
- [IZArc](#) (V4.1.8.2988 or higher)
- Windows integrated Zip tool (Windows 8 / Server 2012 or later)


Please note that the integrated Zip tools of Windows Vista, Windows 7, Windows Server 2003, and Windows Server 2008 are **NOT** Unicode compatible.

7.10 Bulk rename

This dialog allows renaming multiple files at once, using one of several types of rules.

To define a new renaming rule, click the "+" icon and select one of the available rule types. The section "[Available Rules](#)"^[135] shows all rules that have previously been created. Each rule can be activated or deactivated individually and will be applied in the order that they are displayed in. You can reorder existing rulesets by using the icons on top of the list, or by simply dragging and dropping them within the list of available rules. Existing rules can be modified by selecting them. Changes to their configuration will be applied to the [preview](#)"^[136] section immediately.

The right hand side show a [preview](#)"^[136] of the current ruleset. It shows the file names before and after the rename operation and provides a quick overview of whether or not the filename will change or remain the same after the operation.

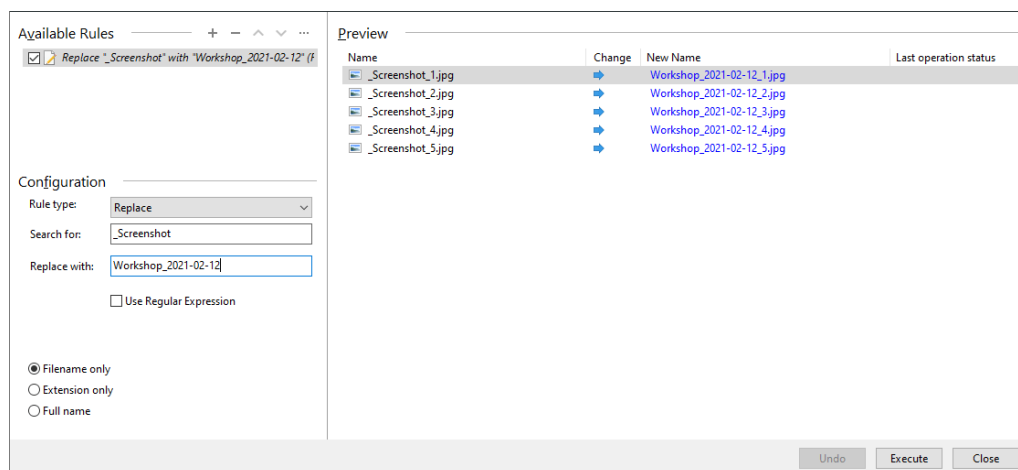

Available Rules

This list shows all previously created renaming rules. The rename operation will be applied in the order of this list. To change the order that the rules are applied in, simply drag and drop the rules to their designated position within the renaming chain. You can also use the right click menu to move the current selection up, or down in the list.

Existing rules can be temporarily disabled via the left hand checkboxes. Only active rules will be regarded in the actual renaming operation

Replace A simple search and replace operation for file names. Under **"Configuration"**, you can enter the search term to search and what to replace it with. Activate the option **"Use Regular Expression"**, if the input term should be interpreted as a regular expression, instead of an exact match. Further information about regular expressions can be found [here](#).

Insert Inserts the given text to the file name at the position that is defined under **"Configuration"**. The text can be appended as prefix, as suffix, or at a specific position.

Serialize Adds a number to the files, starting with the value that is defined under **"Configuration"**. The number can be added as prefix, as suffix, or at a specific position. It is also possible to unify the numbering to a minimum length. Check the option **"Pad to length"**, in order fill up numbers with leading "0"s and ensure a unified length.

Delete The delete rule has two options: Search and removes a certain text, or delete text at a certain position within the target file names. **"Delete text"** will remove all occurrences of a given search term. **"Delete from position"** will remove text at a given position within the target file names. Use **"Length"** to define how many characters should be removed.

The selection **"Filename"**, **"Extension only"**, **"Full Name"** determines which part of the file name should be affected by the rename operation. This selection can be configured for each rule individually.

Preview

This panel shows a preview of the rename operation with the current selection of active renaming rules. The column **"Name"** shows the original file name, while **"New Name"** shows a preview of the names as they would be after the rename operation. The **"Change"** column shows at one glance which names will change and which will remain the same. The column **"Last operation status"** will show whether or not the last renaming of a file was successful, after the operation has finished. If a file could not be renamed successfully, e.g. due to missing permissions, it will be shown in this column.

Execute

Starts the actual rename operation. All active rules will be applied to the files on the right hand side, one after another. Once the operation has finished, the status is shown in the column **"Last operation status"** of the preview list.

Undo

Reverts the last renaming operation back to its previous state. This effectively

means that another rename operation is triggered that renames the files back to their original name.

7.11 Options Dialog

Using the Options dialog you can adjust various settings which affect the appearance, the search behavior, the export and the start of the TreeSize File Search.

These are the available options pages:

General

[Search Engine](#)  138

General settings influencing the search behaviour of TreeSize File Search.

[Exclude Filter](#)  139

Define filtering options for TreeSize File Search.

[View](#)  145

General settings influencing the appearance for the search results of TreeSize File Search.

[Export](#)  141

Configure options for export generation of TreeSize File Search.

[Email](#)  142

Customize email settings for TreeSize File Search.




[Start](#)  148

Define start parameters for TreeSize File Search.


[File Groups](#)  147

Defines the available file groups and which file types should be assigned to which group.

7.11.1 General

- [Search Engine](#)  138
- [Exclude Filter](#)  139
- [Export](#)  141
- [Email](#)  142

7.11.1.1 Search Engine

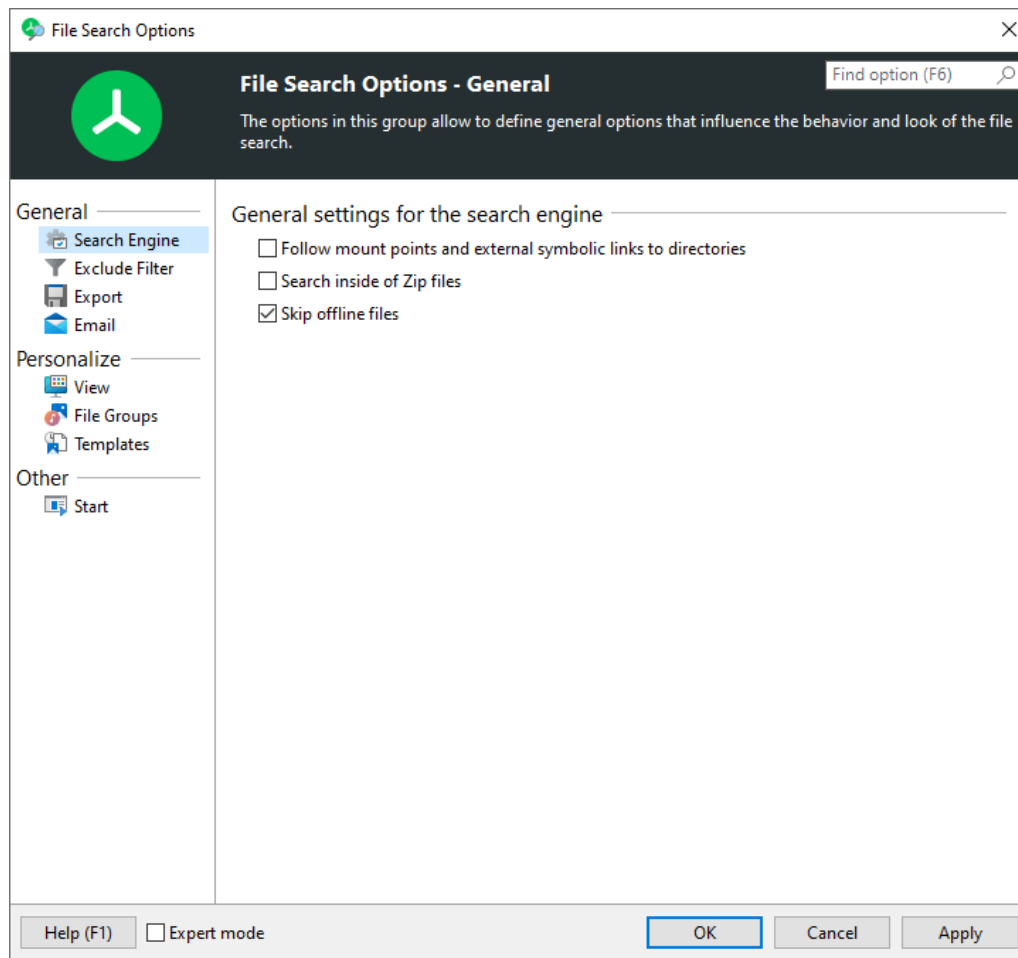


Follow mount points and external symbolic links to directories

You can decide if TreeSize should follow symbolic links and mount points (see [Notes on NTFS](#)^[178] for additional information) that point to other drives or folders on other drives. Links that point within the scanned directory will never be followed in order to prevent circular references and folders from being counted twice.

Skip offline files

Certain search types, such as the duplicates search via MD5-checksum, or the custom search for file content, accesses the content of a file. This would trigger the download of offline files, which is not intended in most cases. Activate this option, to prevent this.

7.11.1.2 Exclude Filter

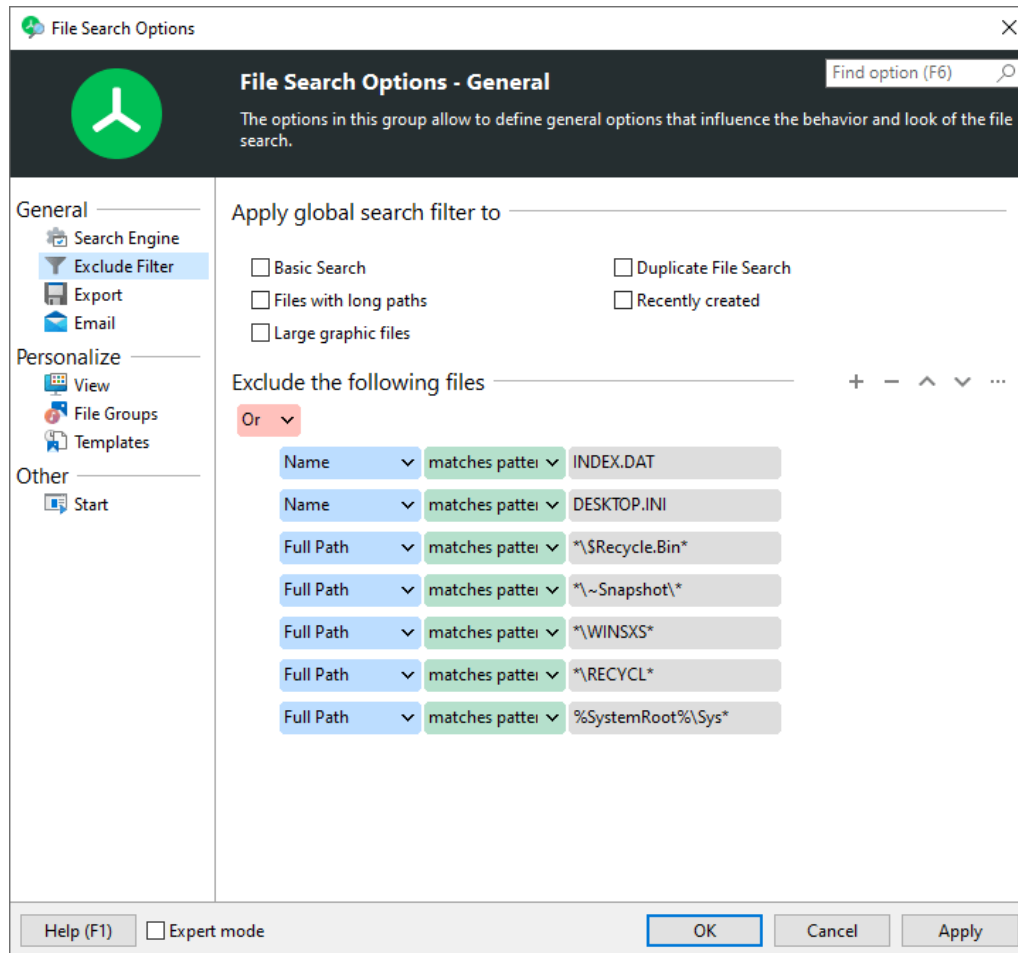

The file search was designed to identify obsolete or very large files in order to clean up a system. Certain files like system files, however, should not be deleted because they are needed by the operating system or other software. Files known to be important for a system can be added to the exclude list here and will then not be shown in the results any more.

Apply global search filter to

Select which of your searches should use the exclude filter. You can select for each of your searches individually, whether or not it should use the filters, or not.

Exclude the following files

This option allows you to define exclude filters which will be used when searching for files. Each file/ folder will be compared against the filters and will not be listed in the result list, if it matches. This can be used, for instance, to prevent system files from showing up in the result list. It can also be used to hide certain elements that are not relevant for your search.

Please note: These filters will only be applied to the searches that are checked above. You can also enable and disable the filters by activating the corresponding option ("Use exclude filter") in the ribbon menu.

How to define an exclude filter


To define a new filter, please follow these steps:

1. Click the "+" button. An entry will be created in the filters list for the new filter.
2. Define the filter:
 - The most common type of filter is a simple "Full Path" filter. Select "Full Path" in the first selection box and "starts with" in the second one. Enter a path such as "C:\Program Files" to filter all files and folders within that path.
 - To exclude a groups of files, such as "System files", select "File type" in the first selection box and the look for the corresponding group in the third.
 - You can also use Wildcard patterns such as "*.exe", or Regular Expression patterns such as ".+\.exe\$". Please make sure that you select "matches pattern" / "matches regular expression" in the second selector of the filter definition.

Further information about how to define search filters can be found [here](#)^[121].

Hint: New files or folders can also be easily added to this list using the right-click menu of the result lists ("Permanently exclude from search results").

7.11.1.3 Export

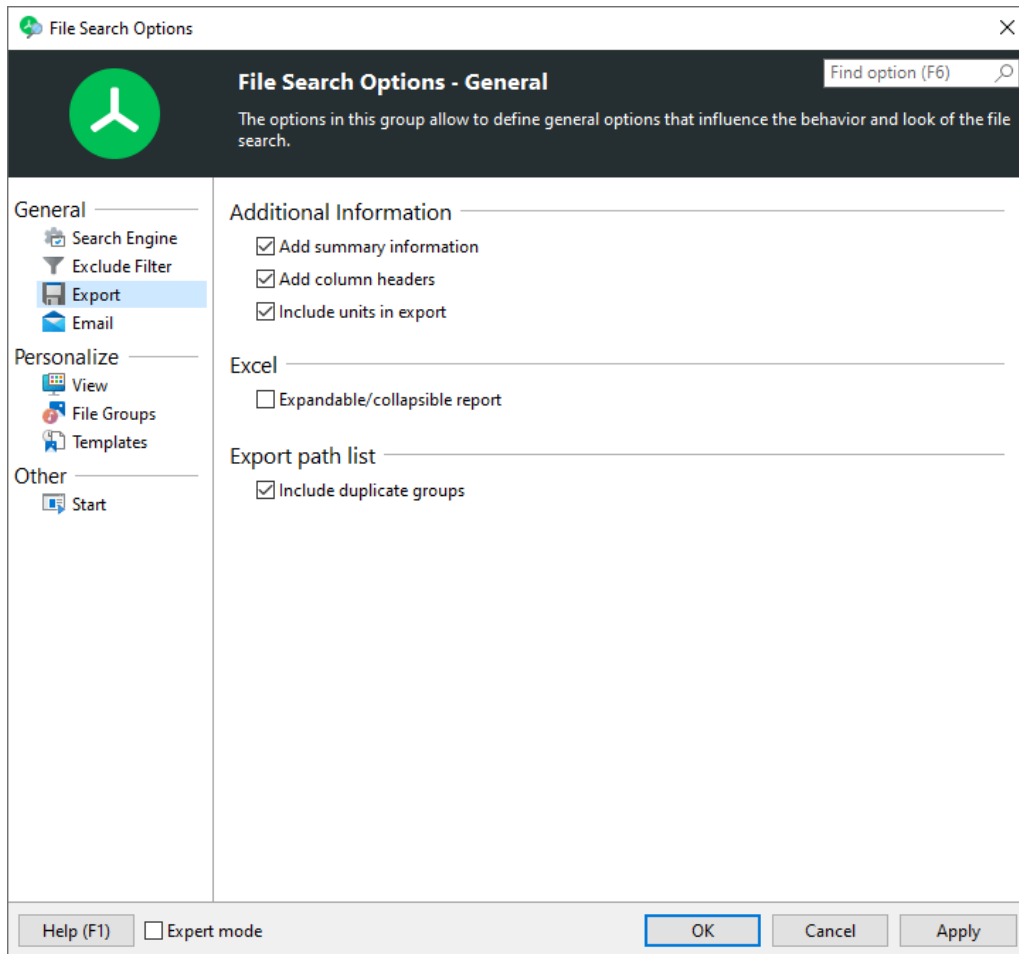

Additional information

You can specify the amount of additional header information that is included in exports of the file search.

Add summary information

Activate this option to include a short summary of the search into the export. This summary contains the path(s) that were processed, the date/time of the search, and the number and size of files and folders that were found.

Add column headers

If this option is set, TreeSize will include a row that displays the names of the columns, in addition to the actual search results.

Include units in export

If this options is activated, units like "KB", "MB", or "%" will be included in the exported data. Uncheck this option, if you want to export plain values.

Excel

Expandable/&collapsible report

A dynamic Excel report will be created in which items with subitems, such as duplicate groups, can be expanded/collapsed just like in the result list.

Export path list

Include duplicate groups

This option allows the export of duplicate search results via "File > List of paths > Export path list". If this option is enabled, TreeSize will include the group structure of the duplicate search, when generating a list of files. This allows importing a previously performed duplicate search, without the need to perform the search again.

7.11.1.4 Email

The screenshot shows the 'File Search Options' dialog box with the 'General' tab selected. The 'Email content' section is active, showing fields for 'To:', 'Subject:', and 'Format:'. The 'Transport' section has two radio buttons: 'Use MAPI client' (selected) and 'Use SMTP server (required for scheduled tasks)'. Below this, the 'SMTP connection settings' section includes fields for 'From:', 'Server:', 'Port:', 'Use secure (SSL) connection', 'This server requires authentication', 'Username:', and 'Password:'. A 'Test Connection' button is at the bottom right of the SMTP settings. The dialog box has a search bar at the top right and a footer with 'Help (F1)', 'Expert mode', 'OK', 'Cancel', and 'Apply' buttons.

Configure email settings for TreeSize File Search.

Email content

To

The email address the report will be sent to.

Subject

The subject of the email. Supports environment variables such as %DATE%, %TIME% or %USERNAME%.

Format

Choose an email format here.

Transport

Use MAPI client

If this setting is checked, TreeSize will use the local MAPI client (for example Microsoft Outlook) for sending mails.

Use SMTP server

TreeSize will use the specified SMTP server to send email reports. Please make sure to test the connection settings before applying the current options. Please note that you will have to enter valid SMTP settings in order to make use of email reports in [scheduled scan or search tasks](#)^[148] or all other kinds of automated starts (e.g. batch programs or command line calls) (Professional Edition only).

From

The email address that will be shown as the sender of the report.

Server

The name (DNS) or IP address of the machine hosting the SMTP service through which messages are to be sent.

Port

The port on which the SMTP service specified in the "Server" field is listening for connections.

Use secure (SSL) connection

Indicates that Secure Sockets Layer (SSL) should be used when sending messages via SMTP.

This server requires authentication

Select this option if SMTP service specified by the Server field requires authentication. Passwords will be encrypted before storing them in the TreeSize settings file.

Test Connection

Test the SMTP connection settings. This will send a test email to the email address specified in the "To" field.

Email body

Include results in mail body

Results will be added to the body of the email. NOTE: For very bigger reports, this can lead to very large mails, which can take a very long time to open in mail clients, or even exceed mail server limitations.

Attach a report with the results

Adds the result report as attachment to the email. This fixes the problem of very large emails that can occur with the other option.

Exported lists**Active list / all lists**

Select which search result lists shall be included in the email : only the currently active search types or all search types.


Exported elements**Checked items / all items in the list**

Select here, if you want to have just the checked/marked result list entries or all entries from the result list included in the email report.

7.11.2 Personalize

- [View](#)¹⁴⁵
- [File Groups](#)¹⁴⁷
- [Templates](#)¹⁴⁷

7.11.2.1 View

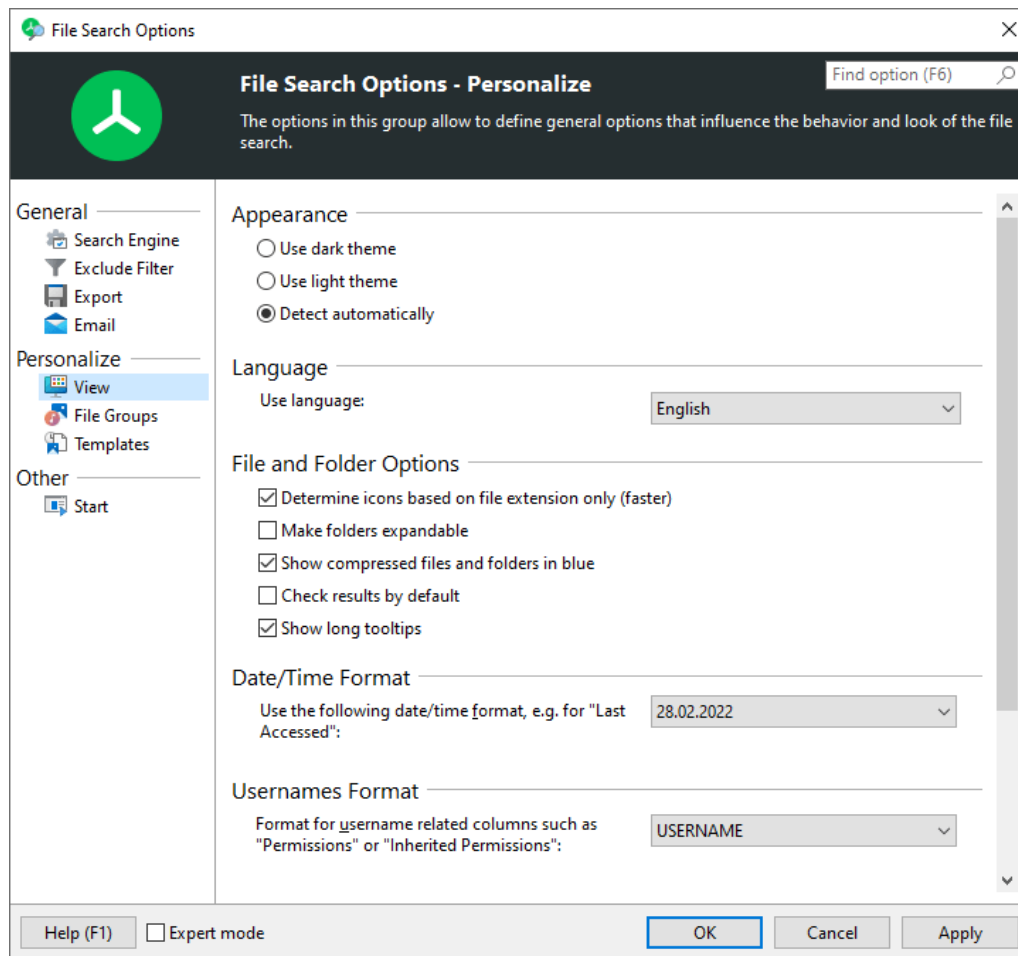

Appearance

Use dark theme / light theme / detect automatically

With this option the appearance of the application can be changed. You can switch between light and dark mode. The option for automatic detection is based on your current Windows setting and automatically adapts the appearance of TreeSize to it.

Language

Use language

Select the language that is used for TreeSize's user interface.

File and Folder Options

Determine icons based on file extension

If this option is set, you will see the default icon for a file of this extension type in the search result list.

Show compress files/folder in blue

If this option is set, NTFS compressed files/folder will appear in blue color in the search result list.

Check results by default

If this boxed is checked, all results in the list will be automatically checked so processing additional steps (like Export, Move items,etc) can be performed with one click.

Show long tooltips

If this option is active, a tooltip window with detailed information will be shown if the mouse cursor hovers over a file or folder for a while.

Date/Time Format

Use the following date/time format, e.g. for "Last Access":

The date/time format that is used by TreeSize in related columns like "Last Access", "Last Change", or "Creation Date" can be defined here. Available formats are date, date+time (without seconds), and date+time (with seconds). Please note that in some rare cases TreeSize may display "wrong" date/time format. For more information on this issue, please refer to [this article](#) from our Knowledge Base.

Username Format

Format for the username appearance if displayed in search result list or export files.


Either just the username is displayed or user name including the related Active Directory domain where user belongs to.

Notifications

Notify, when the search has finished

If this option is enabled, TreeSize will play a notification sound, when the search has finished. If TreeSize is minimized, when the search finishes, it will also show a notification in the Windows notification center, which includes a summary of the search that was just performed and the results that were found (Only supported in Windows 8 and higher).

7.11.2.2 File Groups

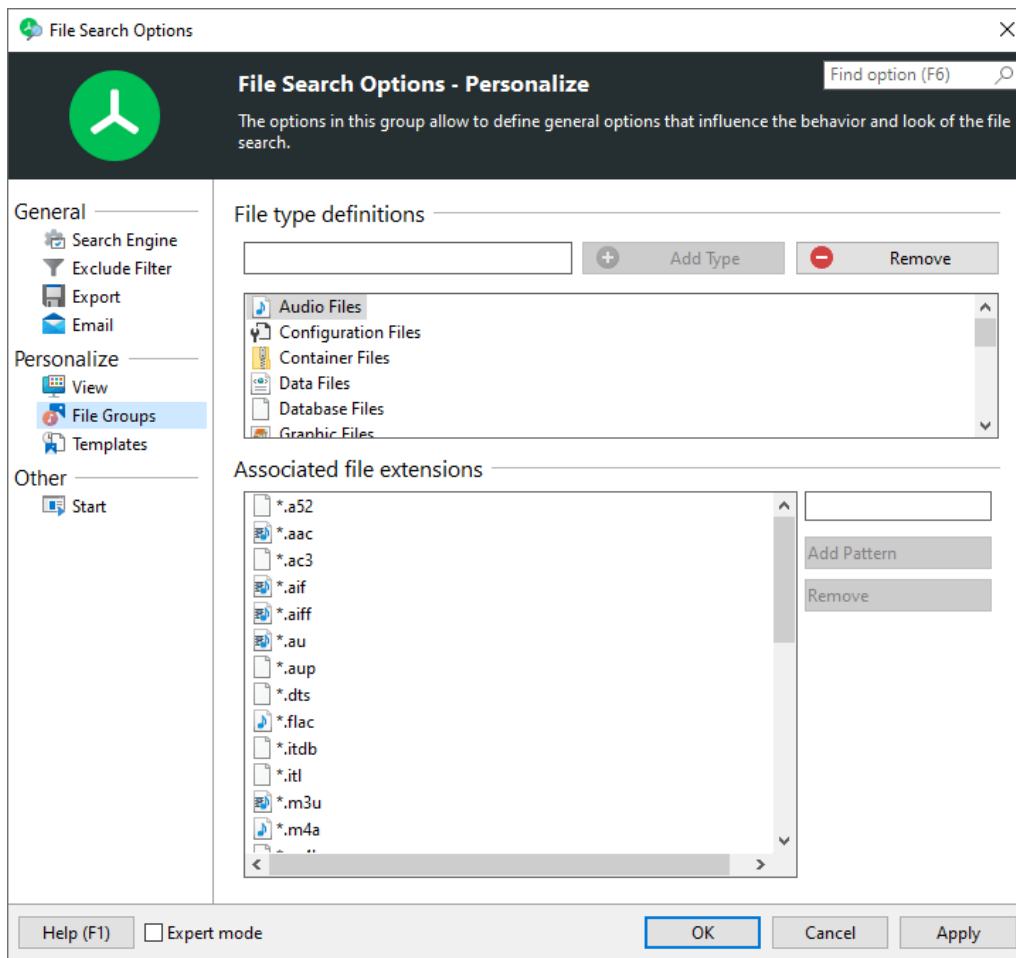

This page allows to modify the different file type groups that are available in the file search and which file extensions should be assigned to which of the different groups. Each of these groups can be used as a [search pattern](#)^[123] in the custom search. The input field "Pattern" can be used as a dropdown, to select one of the available file type groups.

More information, about how to customize these groups, can be found in the chapter "[File Groups](#)"^[72] for the main module of TreeSize. Both the file search and the main module share the same file type groups, so any information that you may have gathered with the help of the [Extensions](#)^[42] view can be further analyzed with the appropriate file search filter.

7.11.2.3 Templates

This page allows to modify the list of existing [templates](#)^[126]. You can change their order, or delete templates that you don't need.

Select one or more templates from the list and use the buttons "Up", "Down", or "Delete" to customize the list to your liking.

7.11.3 Other

- [Start](#) 

7.11.3.1 Start

Modify startup settings for TreeSize File Search

Start As Administrator

Always start this application as administrator

When activated, TreeSize will always start with administrator privileges. This will trigger the UAC (User Access Control) prompt, if UAC is enabled.

Action at Application Start

Load last search settings.

Open file search with the last used settings. Does not start a search automatically.

Run a search using the last load search settings.

Open file search with the last used settings and automatically start a search with these settings.

Run a search using the the following saved search settings.

Start File Search and directly run a search based on previously saved search settings. The XML file containing these settings must be specified here, either by typing the path into the edit field or via browsing in Windows Explorer after clicking the folder button.

Explorer Context Menu

Show TreeSize File Search in Windows Explorer context menu of current user

Select whether the TreeSize File Search should appear in the context menu of folders in the Windows Explorer.

8 Using Scheduled TreeSize Tasks

This section is related to the Professional Edition of TreeSize only, since the Personal Edition does not offer scheduling or command line options!

Keeping your storage in a "clean" state is an ongoing task and requires a consistent overview of the usage. In a real world scenario it is important to find space hogs that use up large portions of the disk as soon as possible. Therefore you might want to use TreeSize to scan your storages regularly after a certain period of usage. Rather than having to do this manually every time, TreeSize offers a functionality to create tasks that automatically run according

to a predefined schedule. This allows you to perform scans, send reports or perform any customized action that you can define freely at any time of the day. Defining a new task can be done by using the [Schedule Dialog](#)^[149].

The dialog allows you to choose one or multiple paths to scan and allows a variety of ways to export the results of the scan.

All settings that are defined here will be applied to the scan task automatically. TreeSize will assign the corresponding [Command Line Options](#)^[160] to the new task and reapply them to the user interface when you want to edit an existing task at a later point in time.

8.1 Schedule Dialog

It is possible to schedule tasks using the "**scheduled tasks**" folder of Windows. This dialog will help you create a scheduled TreeSize Professional task with the corresponding command line options.

Please note: This feature is only available in the Professional Edition.

Open the dialog by clicking on "[Scan > Schedule this scan](#)"^[18] from within the TreeSize Professional main application or on "[Tools > Schedule current search](#)"^[105] from the TreeSize Professional File Search.

The TreeSize tasks can be configured, viewed, and edited using the following tabs:

Current Task

[Options](#)^[150]

Contains general options, such as the scan path, sorting, or filter that you want to apply to your scan results.

[Export](#)^[152]

Allows to define in which formats you want to export your reports in this task.

[File operation](#)^[154] (TreeSize File Search only)

Search results can be moved, copied, deleted, or archived automatically by this task. These options can be enabled and configured here.

[Advanced](#)^[156]

Provides advanced customization possibilities, such as a custom title for the export, or a different list separator.

[Command Line](#)^[157]

A preview of the command line parameters that will be used for this task. In this page, you can test the current settings, copy the parameters to the clipboard, or save them to a batch file.

[Schedule](#)^[158]

Here you can set up a date and time when the task should be executed.

All Tasks

[List of Tasks](#)^[159]

Shows a list of all TreeSize tasks that were created in the past.

Use the **"Save Task"** button to save your configurations in a new Windows scheduled task.

8.1.1 Options

You can specify further options for the scan and the exported results here.

Task Scheduler - Current Task
Create new task

Current Task

- ☒ Options
- ☐ Export
- ☐ Advanced
- ☐ Command Line
- ☐ Schedule

All Tasks

- ☒ List of Tasks

Path(s) to scan

Options File

☐ Use saved options:

Export Options

Sort By: Last used in user interface

Size Unit: Use setting from "Options" > "Export"

☒ Include units in export

Expand

☐ To level: 1

☐ Full

☒ Use setting from "Home > Options > Export"

Filter

☐ Include single files

☐ Hide elements smaller than: 1 MB

☐ Exclude following file types:

Help (F1) Save Task Close

Path(s) to scan

Enter the path or multiple paths to be scanned here. Please note: Multiple paths have to be quoted using double quotes (") and have to be separated by a blank.

Options file

Use this option to apply previously exported user settings to the current operation. User settings of the main application can be exported using ["File > Options > Export"](#)^[10]; settings of the TreeSize File Search can be exported through ["File > Save search options"](#)^[99].

Export Options

Sort By

Choose a [column](#)³⁹ to sort the export reports by. Select "Last used in user interface" to use the sort column that was configured when TreeSize was used the last time.

In addition to the list of columns that are selectable, you can also manually enter the name of any other column, such as "Owner", by using the free text input.

Size Unit

Specify the unit size values will be displayed in. Select "Last used in user interface" to use the size unit configured when TreeSize was used the last time.

Include units in export

If this option is check-marked, units of measurement like "KB", "MB", or "%" will be included in the exported data. Uncheck this option if you would like plain number values to be exported. Without units, the thousands separators will also be omitted, thus simplifying further processing of the exported data.

Expand

Specify how many levels in the directory tree will be expanded after scanning. If you select "Full", all folders will be expanded. Select a specific directory level to limit a report to the most relevant information only and thereby also limit the size of the report.

Filter

Include single files

Activate this option to ensure that single files are included in exports of this scheduled scan.

Hide elements smaller than

Defines a minimum size for small files and folders. Only elements that exceed this value will be shown in the export.

Exclude following file types

Specify patterns for files and folders to be excluded from a scan.

Include only following file types


Enter a file pattern filter here. Only files matching certain patterns (e.g. *.MP3 or *.DOC) will be included in the scan.

Include only files with archive attribute set

This option will include only files in the scans for which the Windows archive bit was set. This option can be very useful if you want to calculate the size of a backup based on the Windows archive bit for a certain directory.

8.1.2 Export

Here you can select which of the export options supported by TreeSize Professional will be used for the scan.

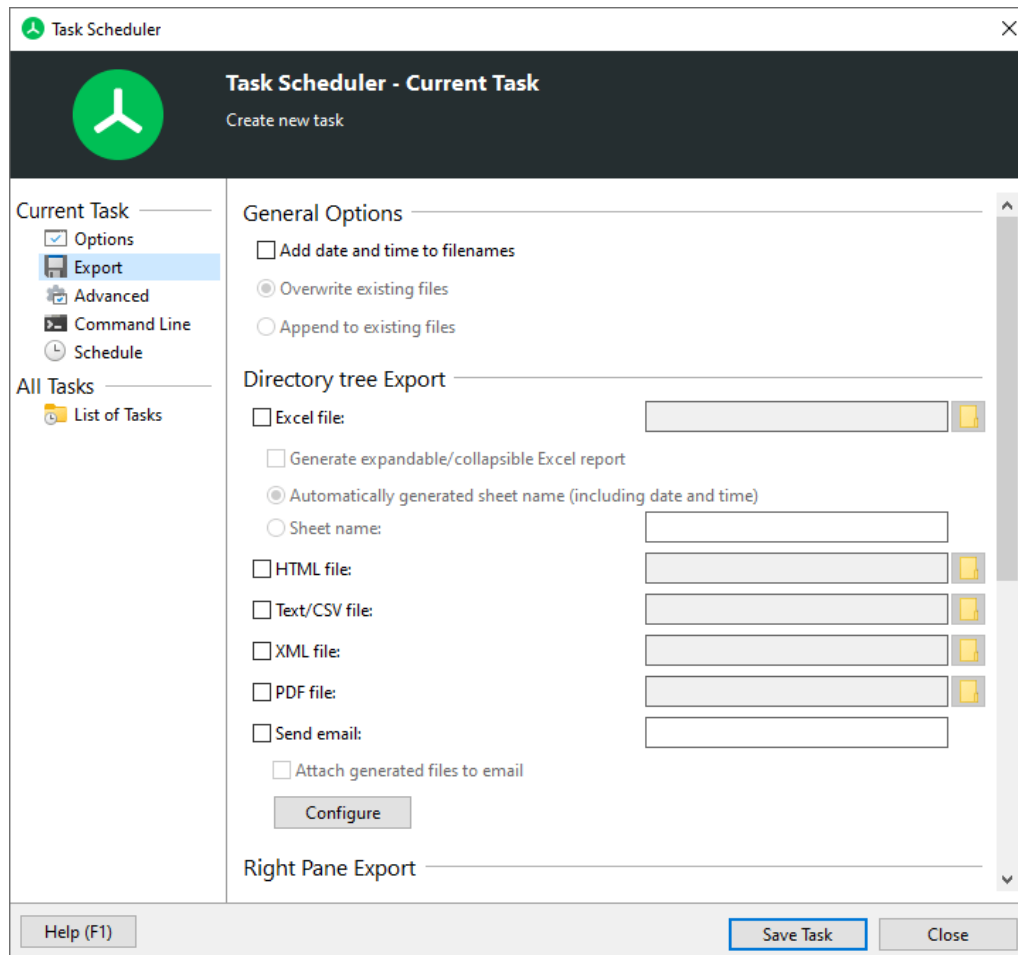

General Options

Overwrite existing files If this option is active, TreeSize will overwrite files that already exist during the export. This means, that older reports with the same file name will be replaced with a newer one.

Append to existing files Activate this option to append to existing files. This allows to add new content to your reports, while keeping the information of a previous export intact.

Add date and time to file names If you want to make sure that each report has a unique file name, you can use this option to add the current date and time to all exported file names.

Directory Tree Export

Excel file	Exports the collected data to Excel and saves it under the selected file name.
Generate expandable/collapsible Excel report	Activate this option to create an interactive Excel report, where each directory can be expanded and collapsed separately.
Automatically generated sheet name (including date and time)	The new Excel sheet will be automatically named in an informative way, including date and time information in the sheet name.
Sheet name	Enter a sheet name here. Please note: If the sheet name is not unique in the selected Excel file and you check-marked "Append to existing file", the new export will be appended to the existing sheet. If "Append to existing file" is unchecked, a suffix will be added to the sheet name to make it unique."
HTML file	Saves the collected data to a HTML file which can be viewed with any HTML browser.
Text file	Saves the results to a text or CSV file after the scan or search operation is finished.
XML file	Saves the results to a XML file. The file may be loaded at a later date and can be used for comparisons (See: "Compare with saved scan" ¹⁸).
PDF file	Saves the results to a PDF file after the scan or search operation is finished.
Print report	Prints a report for the scanned directory branch on the default printer. Choose "First page only" to print only the first page of a report or "All pages" to print all pages.
Send email	Sends an email with the chosen exports to the recipients specified here. Note: Multiple email addresses have to be separated by a semicolon (;).
Attach generated files to email	Activate this option to attach all generated report files to this email.
Send email only if results were found	(File Search only) With this option, TreeSize will only send an email if at least one result has been found by either of the activated file searches.
Right Pane Export	
Top files	This option allows you to save the "Top Files" ⁴⁷ of the scanned file system branch to an Excel, CSV, or text

	file.
Statistics on file types	This option allows you to save the " Extensions ⁴² " statistic of the scanned file system branch to an Excel, CSV, or text file.
Statistics on user names	This option allows you to save the " Users ⁴³ " statistic of the scanned file system branch to an Excel, CSV, or text file.
Charts to include	Saves the Pie-, Bar-, Age of Files-, History-, Extensions-, Users-, or Treemap chart of the scanned directory to a bitmap, GIF, JPEG, or PNG file. The file type depends on the extension of the specified file name.


Charts to include

Saves the Pie-, Bar-, Age of Files-, History-, Extensions-, Users-, or Treemap chart of the scanned directory to a bitmap, GIF, JPEG, or PNG file. The file type depends on the extension of the specified file name.

Please Note: Some of the statistics can additionally be exported in a text format, such as CSV.

8.1.3 File Operation

Here you can configure move operations to be performed automatically after the TreeSize File Search has finished.

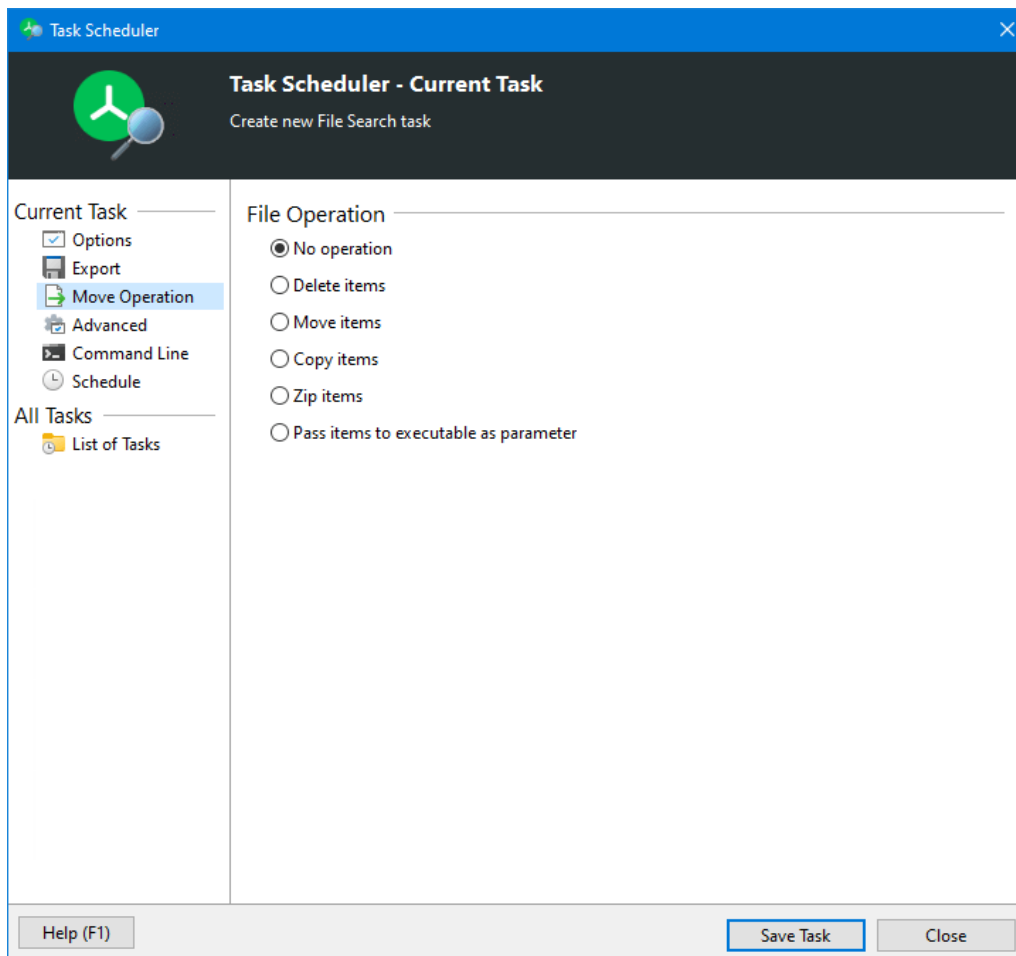


Configure move operations to be performed with the results of a TreeSize File Search. Any file that is returned as a search result of this automated task will be affected by the file operation.

The options offered here are the same as what is described in the chapter "[File operations](#)"^[130]. You can find the additional information about the creation of scheduled file operations in [this](#)^[176] chapter.

Please note: This option will perform changes on your file system. These changes cannot be reverted automatically. Please use with caution!

8.1.4 Advanced

Here you can specify advanced options for the scan and the exported results.

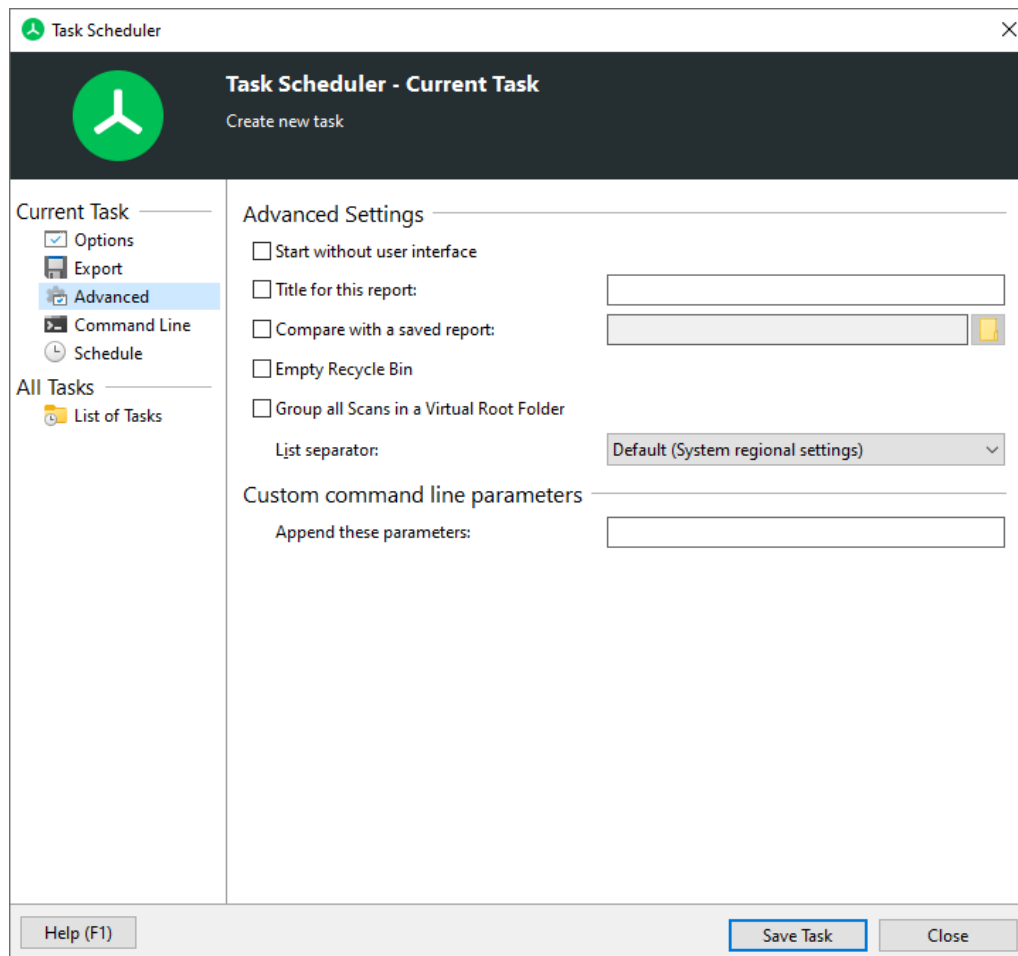

Advanced Settings

Start without user interface

No window will be shown and the application will not appear in the task bar. Useful for background scans.

Title for this report

Can be used to change the title of the printed or exported report. The use of environment variables is allowed.

Compare with a saved report

Compares the scanned path with a saved XML report. The exports you configured on the "[Export](#)¹⁵²" tab will show the differences of the current file system compared with the saved XML report.

Empty recycle bin

If this option is active, TreeSize will automatically empty the recycle bin of the current user before any other operation is executed.

Group scans in a Virtual Root Folder

Using this option will group all scanned directories under a "virtual root folder", corresponding to the option

"[View > Group scans](#)^[20]" from the main user interface. See topic [Directory Tree](#)^[29] for more information.

List separator

Configure the separator to be used for text and CSV exports here.


Select "Default" to use the most suitable separator for the selected export type (tabulator for text files, list separator from the systems regional settings for CSV files).

Custom command line parameters

This input field allows to add custom [command line parameters](#)^[160]. TreeSize supports a variety of [command line parameters](#)^[160], not all of which are available as option in the user interface. With this text field, however, you can add them manually.

8.1.5 Command Line

In this tab you can view the full command line of the currently configured task.

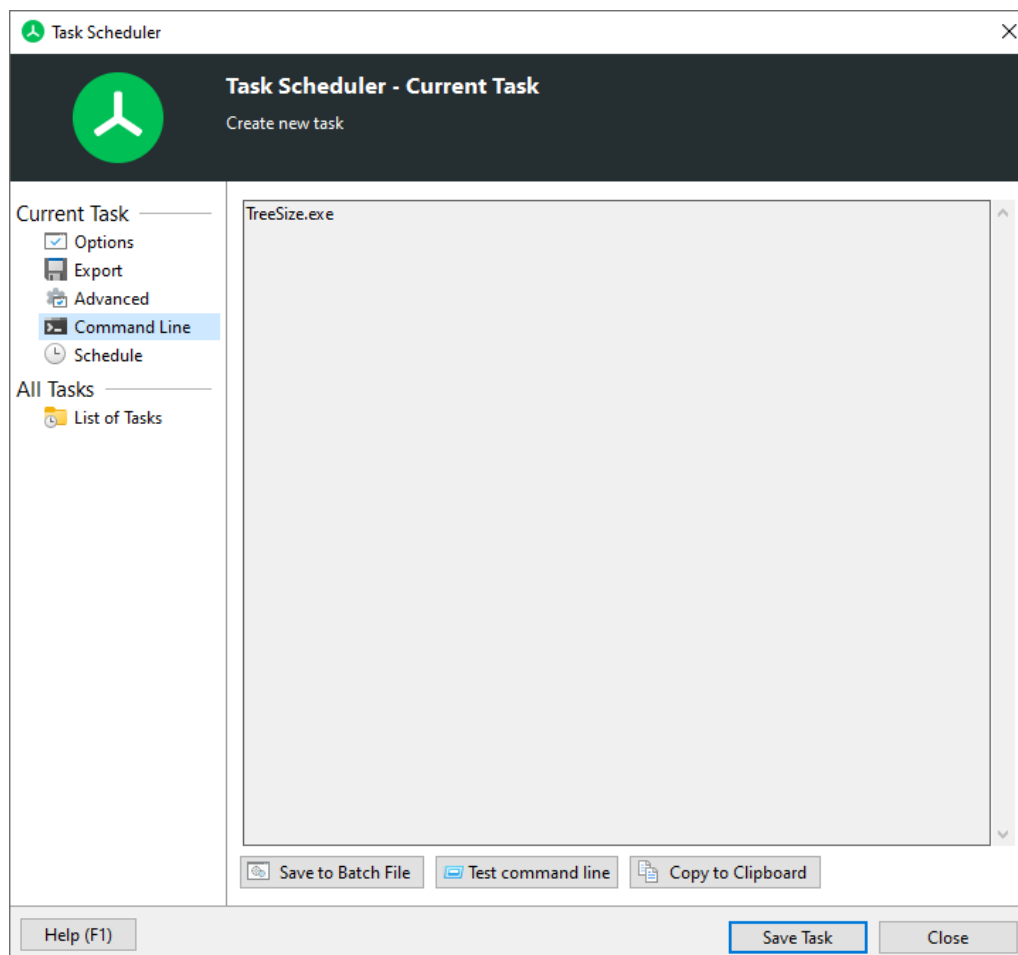

Use the context menu or the corresponding buttons below the command line to save the TreeSize task to a configurable batch file, to run the TreeSize task now, or to copy the task to the clipboard.

8.1.6 Schedule

Here you can specify when and in which interval the task should be executed.

The screenshot shows the 'Task Scheduler - Current Task' window. The left sidebar has 'Current Task' and 'All Tasks' sections. Under 'Current Task', 'Options', 'Export', 'Advanced', 'Command Line', and 'Schedule' are listed, with 'Schedule' selected. Under 'All Tasks', 'List of Tasks' is listed. The main area is titled 'Task Scheduler - Current Task' and 'Create new task'. The 'Schedule Interval' section is active, showing a 'Start' date of 2/28/2022 at 11:00 AM. The 'Once' radio button is selected. Below it, the 'Daily' option is set to 'Every 1 day(s)', the 'Weekly' option is set to 'Every week, on Monday', and the 'Monthly' option is set to 'On day' with a dropdown menu. At the bottom, there are buttons for 'Help (F1)', 'Save Task', and 'Close'.


Schedule Interval

- Once** The task will be executed only once, at the specified "Start at" date and time.
- Daily** The task will be executed every day, or all 2,3,4... days, starting at the date and time specified under "Start at".
- Weekly** The task will be executed weekly (on a specified week day), starting at the date and time specified under "Start at".
- Monthly** The task will be executed monthly. You can set up a task to run either
- on all specified days. For example: "On day 1,15, and 30 of the month."
 - on certain weekdays, such as "every second and last Monday" of the month.

Both options will be applied after the starting time and date that was specified under "Start at".

8.1.7 All Tasks

Shows a list of all scheduled Windows tasks that trigger an execution of TreeSize.

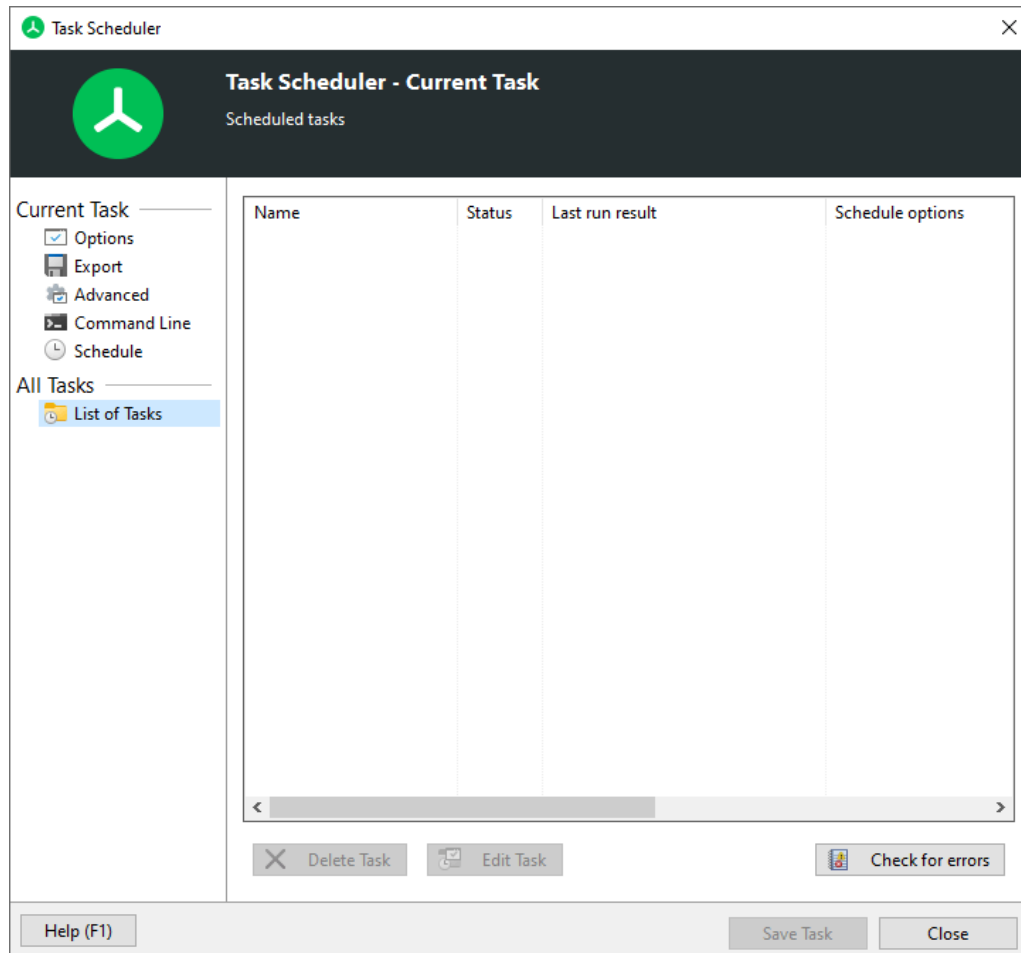

This list shows detailed information about each task:

Name	The name that was given to the task when it was created. This can help you identify unique tasks, for example a specific search, or a monthly scan.
Status	The current status of the task. Indicates if a task is ready to run, currently running, or disabled.
Last run result	The last status of this task. This column shows if the last execution of a task was successful, if it failed, or if it has never been executed yet.
Schedule options	The time parameters that were defined for this task. This determines when and how often it will be executed.

Command line options Shows the command line parameters that will be used for this task.

Run as... The account information that is used for this task.
Please note: If no explicit options file is used for this task, TreeSize will use the settings of this user.

By right clicking one of the tasks, you can open the context menu that allows to activate or deactivate an existing task, edit it in Windows directly, or perform other operations. Some of these can also be quickly accessed via the buttons at the bottom of the page:

Edit Task Allows you to load the currently selected task into the schedule dialog, so that it can be modified.

Delete Task Deletes the currently selected task.

Activate/Deactivate Task Activates or deactivates the currently selected task.

Execute Task Executes the selected task, using the specified user credentials of the task.

Import from file Allows to import existing tasks from an XML file. This can be useful when migrating existing tasks from an existing system to a new one.

Export to file Exports an existing task to an XML file, which can be imported again at a later point in time, or on a different system, using the function "Import from file".

Open Windows Task Scheduler Opens Windows' task scheduler dialog.

Event Log Provides a direct shortcut to the "Application" section of the Windows Event Log. Any error that occurs during the execution of a scheduled task will be logged here.

Refresh List Loads the list of tasks from the system again and refreshes the user interface accordingly.

8.2 Command Line Options

The Professional Edition of TreeSize accepts command line options enabling you to run scheduled scans or to have the results of a scan on your monitor the next morning. The [Schedule dialog](#)¹⁴⁹ will help you compile a command line with the options below. **Please note:** These option are not available in the Personal Edition.

Treesize.exe [/OPTION] SCANPATH

<code>/?</code> or <code>/HELP</code>	Shows this help page.
<code>/AGEOFFILES</code>	<p>Saves the graph on the "Age of Files" tab of the scanned directory to a bitmap, GIF, PNG, JPEG, Text, or CSV file. The file type depends on the extension of the specified file name. The following example creates a JPEG image file of the "Age of Files" graph for your local drive C:</p> <pre>Treesize /SCAN "C:\" /AGEOFFILES "C:\Documents\c_file_ages.jpg"</pre>
<code>/APPENDTOFILES</code> <code><value></code>	<p>With this option, you can select whether or not TreeSize should append its output to existing files when doing an export, e.g. when using <code>/TEXT</code>. Select "True" to append and "False", if you want to overwrite existing files.</p> <p>Please note: This parameter will not work with exported images, XML and PDF files. Those files always will be overwritten. You can use the switch <code>/DATE</code> to ensure that all generated reports will have a unique file name.</p> <p>When exporting to an Excel file via <code>/EXCEL</code>, this parameter can be used together with <code>/SHEETNAME</code> to append the data to the specified sheet. Example:</p> <pre>Treesize.exe /SCAN "C:\" /APPENDTOFILES True /EXCEL "C:\Export.xlsx" /SHEETNAME "test"</pre> <pre>Treesize.exe /SCAN "C:\" /APPENDTOFILES False /TEXT "C:\Export.csv"</pre>
<code>/ARCHIVEBITFILESONLY</code>	<p>This option will include only files for which the archive bit set in the scans. This option can be very useful if you want to calculate the size of a backup. In this case, you can create a shortcut on your desktop or in your start menu that will automatically start calculating the size of your backup. Example:</p> <pre>Treesize /ARCHIVEBITFILESONLY /SCAN "\\Server\Backup\This"</pre>
<code>/ATTACH</code>	<p>If specified, all exported files will be attached to the email. If not specified, files with an explicitly given path are not attached. This is useful in case you XML or Excel files are getting quite large and fill up you email account.</p> <p>This example will export to an Excel file but not attach it to the mail:</p> <pre>TreeSize.exe /SCAN "F:\" /EMAIL "treesize@example.com" /EXCEL "C:\Temp\test.xlsx"</pre> <p>These examples will attach the Excel file to the email:</p> <pre>TreeSize.exe /SCAN "F:\" /EMAIL "treesize@example.com" /EXCEL</pre> <pre>TreeSize.exe /SCAN "F:\" /EMAIL "treesize@example.com" /ATTACH /EXCEL "C:\Temp\test.xlsx"</pre>
<code>/BARCHART</code> <code><filename></code>	Saves the bar chart of the scanned directory to a bitmap, GIF, PNG, or JPEG file. The file type depends on the extension of the

specified file name. This example creates a PNG image file of the bar chart for your local drive C:

```
Treesize /SCAN "C:\\" /BARCHART "C:\Documents\c.png"
```

/COMPARE
<filename|
path>

Compares the scanned path with a saved XML report. The following example scans drive C: and compares the result with a saved XML report for this drive:

```
Treesize /COMPARE "C:\Reports\TreeSize\c.xml.zip" /SCAN "C:\\"
```

Instead of an XML file, you can also use a path with this command line parameter. The given path will be compared with the current scan result. The following example scans drive C:\ and additionally uses the path D:\Backup_of_C to perform a comparison between the two:

```
Treesize /SCAN "C:\\" /COMPARE "D:\Backup_of_C"
```

Alternatively, you can compare two already existing XML reports e.g. "c1.xml.zip" and "c2.xml.zip" by using this command :

```
Treesize /OPEN "C:\Reports\TreeSize\c1.xml.zip" /COMPARE "C:\Reports\TreeSize\c2.xml.zip"
```

The /OPEN command prepares the comparison of the two files by expanding the first file ("c1.xml.zip") into a scan file. The second file ("c2.xml.zip") will be compared to this expanded scan file, just like it would happen, if "c2.xml.zip" was compared to a "real" scan.

/COPY
<path>

This option can only be used in combination with the command line option [/SEARCH](#)^[170].

Copies the results of a TreeSize [file search](#)^[97] to the target location.

The following command will search on your local drive C: using the latest search options and copies the search results to the folder "C:\temp\ObsoleteFiles":

```
Treesize /SEARCH:Start /SCAN "C:\\" /COPY "C:\temp\ObsoleteFiles"
```

See also: [File operations](#)^[130]

/CREATED
PASTDAYS
ONLY <n>

This option will include only files in the scans, which were created during the number of days entered in the argument. In the following example, this option will only include only files created during the last eight days in the scan:

```
Treesize /CREATEDPASTDAYSONLY 8
```

/CREATESN
APSHOT
<drive>

Creates a snapshot for the drives that are given after this command line paramter. Example:

```
Treesize /CREATESNAPSHOT "C:\\" "D:\\"
```

Creating snapshots may require administrative privileges.

/CSV
<filename>

Saves the results to a CSV file after the scan or search is finished. The application will terminate itself after saving. This

example will save the results of a File Search on your local drive C: with the last search configurations to a CSV file:

```
Treesize /SEARCH:Start /SCAN "C:\" /CSV "C:\Results\C_search.csv"
```

/DATE

This switch will add the current date and time to all export file names in the command line. This is useful if you want to do scans regularly, e.g. every night or every weekend. The following example will scan the network path "\\Host\Share" and save the result to a file like "C:\Scans\name_2013-08-14_17-18-24.xls":

```
Treesize /SCAN "\\Host\Share" /DATE /EXCEL "C:\Scans\name.xls"
```

/DEDUPLICATE

This option can only be used in combination with the command line option [/SEARCH](#)^[170].

It will replace the duplicate files that were found by the TreeSize [duplicate file search](#)^[112] with [NTFS hardlinks](#)^[178]:

```
Treesize /SEARCH:Start /SCAN "C:\" /DEDUPLICATE
```

/DELETE

This option can only be used in combination with the command line option [/SEARCH](#)^[170].

Permanently deletes all files that have been found as result of a TreeSize [file search](#)^[97]. Example:

```
Treesize /SEARCH:Start /SCAN "C:\temp" /FILTER "*.tmp" /DELETE
```

See also: [File operations](#)^[130]

/EMAIL <recipient>

Sends the collected data to the given email address. This parameter can be used only once on the command line, and only one email with all results will be sent. Multiple recipients can be separated with semicolons (;) or commas. To send emails via the command line, you need to specify valid SMTP settings on the [corresponding page](#)^[91] in the TreeSize options dialog. Example:

```
Treesize /SCAN "\\Server\Share" /EMAIL "treesize@example.com"
```

If no other parameters have been specified, the email will be sent in the format that is set in the options (HTML or plain text). If you would like to define the format independent from the current options, you can use the parameters /TEXT or /HTML right behind the definition of the recipient address(es). Example:

```
Treesize /SCAN "\\Server\Share" /EMAIL "treesize@example.com" /TEXT
```

By combining parameters you can also add attachments to the email. The following example will add an Excel report of the scan as an attachment to the email:

```
Treesize /SCAN "\\Server\Share" /EMAIL "treesize@example.com" /EXCEL
```

/EMAILIFRESULTSFOU

This option can only be used in combination with the command line options [/SEARCH](#)^[170] and [/EMAIL](#)^[163]. If this parameter is specified, TreeSize will only send an email with the current

- ND** search results, if at least one file or folder has been found during the search, by any of the specified search types.
- /EMPTYRECYCLEBIN** If you use this option, TreeSize will empty the recycle bin before running the current scan. Example:
- ```
Treesize /EMPTYRECYCLEBIN /SCAN "C:\"
```
- /EXECUTE <filename>** This option can only be used in combination with the command line option [/SEARCH](#)<sup>[170]</sup>. This parameter allows passing files that have been found by the TreeSize [file search](#)<sup>[97]</sup> to another application or script. A possible target for this parameter can be a batch, or a powershell script. The following example will search drive C:\ with the most recent search settings and call the script "Archive.bat" for each file that has been found. The file will be passed to the script as command line parameter:
- ```
Treesize /SEARCH:Start /SCAN "C:\" /EXECUTE "C:\Scripts\Archive.bat"
```
- See also: [File operations](#)^[130]
- /EXCEL <filepath>** Exports the collected data in Microsoft Excel format and saves it under the entered file path. If only a file name is specified, the current installation directory is used to store the export. Supported formats are the conventional .XLS file format (Excel 97-2003) as well as the .XLSX format (introduced with Excel 2007). The used format depends on the extension of the specified file name. The application will terminate itself after saving. Example:
- ```
Treesize /SCAN "C:\" /EXCEL "C:\Documents\c.xls"
```
- If the file name already exists, the file will be opened and a new worksheet will be added.
- Please note:** In the TreeSize File **Search** (/SEARCH) the results of each search type are collected in their own specific worksheet. If the file under the given path already exists, these sheets will be overwritten. To prevent this, you need to use the command line option /APPENDTOFILES.
- /EXCLUDE <pattern1;pattern2>** This option enables you to specify patterns for files and folders that should be excluded from a scan. Multiple exclude patterns can be separated using a semicolon (;). If one or more of the patterns contain spaces, the complete pattern string must be set into quotes ("). The following example will ignore files and folders that end with ".tmp" or where the exact name is "system":
- ```
Treesize /SCAN "\\Server\Users" /EXCLUDE "*.tmp;system"
```
- /EXPAND <level|size>** This option lets you specify how many levels in the directory tree will be expanded after scanning. If you don't specify a number after this option, all folders will be expanded. Instead of a directory level you can also indicate an amount in Mega Byte (MB). In this case all folders larger than the given amount will be expanded. The unit "MB" must follow the number without a blank. The following example will scan the folder "H:\User", expand all

folders larger than 10 MB and save the result to the Excel file "C:\Results\Allusers.xlsx":

```
Treesize /SCAN "H:\User" /EXCEL "C:\Results\Allusers.xlsx" /EXPAND 10MB
```

**/EXPANDABLE
LEREPORT**
<value>

If this option is used, Excel exports will use expandable/collapsible groups that can be navigated similar to the directory tree.

```
Treesize /SCAN "H:\User" /EXPANDABLELEREPORT True /EXCEL "C:\Results\Allusers.xlsx"
```

```
Treesize /SCAN "H:\User" /EXPANDABLELEREPORT False /EXCEL "C:\Results\Allusers.xlsx"
```

/EXPORTDRIVESLIST
<filename>

This option enables you to export the contents of the "[Drive List](#)"^[51] to an Excel, Text, or CSV file. The file type depends on the extension of the specified file name. Example:

```
Treesize /SCAN "C:\Results\AllDrives.csv" /EXPORTDRIVESLIST
```

/EXPORTFILES

If specified, files will be included in all exports. So this option is equivalent to activating the option "Tools > Options > Export > * > Exported elements > [Folders and single files](#)"^[83]

/EXPORTGROUPSEXPORTED

if specified, the [export of the extensions list](#)"^[165] will contain all information about the extensions contained within groups.

/EXPORTPATHSLIST
<filename>

This option can only be used in combination with the command line option [/SEARCH](#)"^[170].

Exports a simple list that contains all search results. The list will contain only the full paths of the search results and no other information. Supported formats for the destination file are .txt and .csv.

This example will search for, and create a list of all exe files on drive C:

```
Treesize /SEARCH:Start /SCAN "C:\" /FILTER "*.exe" /EXPORTPATHSLIST "C:\Results\SearchResults.csv"
```

It can be used to import results of a previous search back into the user interface, by using "File > List of paths > Import path list", or the parameter [/IMPORT](#)"^[167].

If the option "Tools > Options > Export > [Include duplicate groups](#)"^[142] is activated, you can also use this function to export and import results of the duplicate search including their group structure.

/EXPORTTITLE
<title>

Can be used to change the title within a printed report or exported file. This allows you to supply additional information to the user when using TreeSize in an automated environment. The use of environment variables is allowed as well. Example:

```
Treesize /SCAN "\\Server3\C$" /EXPORTTITLE "This is drive C on Server3" /PRINT
```

/EXTENSION

This option enables you to save the statistics on file extensions / file types of the scanned file system branch to an Excel, HTML,

NSLIST
<filename> Text, or CSV file. The file type depends on the extension of the specified file name. The exported columns will be those that were enabled in the user interface on the tab "Extensions" when it was last used, or at the time when the configuration file supplied via [/OPTIONS](#)^[169] was written.

The following example scans drive C: and creates an Excel file named "D:\TreeSize Reports\C_filetypes.xls" with the statistics of the file types on this drive:

```
Treesize /SCAN "C:\" /EXTENSIONSLIST "D:\TreeSize
Reports\C_filetypes.xls"
```

/EXTENSIONSC
ART
<filename> Saves the small graph shown on the bottom of the ["Extensions"](#)^[42] page to an image file (bitmap, GIF, PNG, or JPEG).

/EXTENSIONSP
IECHART
T
<filename> Saves a piechart that shows the distribution of ["file extensions"](#)^[42] to an image file (bitmap, GIF, PNG, or JPEG).

/FILTER Sets a file filter counting only files with certain extensions, e.g. ".mp3" or ".doc". Multiple patterns may be passed, separated by semicolon (;). The following example will search for MP3 and AVI files in the "Users" directory on the server:

```
Treesize /SCAN "\\Server\Users" /EXCEL "C:
\Results\UsersMediaFiles.xlsx" /FILTER "*.mp3;*.avi"
```

When performing a TreeSize File Search (**/SEARCH**), you can also use the **/FILTER** command line switch to specify the patterns of the [advanced file search](#)^[118]. To perform a more complex custom file search you should [save the search options](#)^[99] to a file and pass the resulting XML file to the command line after **/SEARCH**.

/FOLLOWR
EPARSEPO
INTS If this switch is added to the command line, TreeSize will follow [mount points](#)^[179] and external symbolic links when scanning a file system tree.

/GROUPSC
ANS Using this command line switch will group all scanned directories under a virtual root folder. Use **/GROUPSCANS FALSE** if you want to ensure that no virtual root folder is used.

/HIDESMALL
FOLDERS
<value> Allows to hide objects that are smaller than a minimum size, which is useful for getting clear exports. **<value>** can be a size value with unit, or a plain byte value without unit. Cannot be used in combination with **/EXPAND**. In this example only folders having a minimum size of 50MB will be exported:

```
TreeSize /HIDESMALLFOLDERS 50MB /EXCEL "C:\Results\DriveC.xlsx" /SCAN C:\
```

/HISTORYCHART
<filename>

Saves the graph on the "[History](#)"^[49] tab of the scanned directory to a bitmap, GIF, PNG, or JPEG file. The file type depends on the extension of the specified file name. This example creates a JPEG image of the history graph for drive C:

```
Treesize /SCAN "C:\" /HISTORYCHART "C:\Documents\c_history.jpg"
```

/HTML
<filename>

Saves the collected data to a HTML file which can be viewed with any HTML browser. You can specify which information of the scan will be included in the export via "Home > Options > Export > HTML > [Charts and lists to include](#)"^[84]. You can select which of the additional lists, or charts should be added to the export. They will automatically be embedded into the HTML file that is generated after the scan.

The following example will generate an HTML report for the drive C: and save it to "D:\HTML":

```
Treesize /SCAN "C:\" /HTML "D:\HTML\treesize.html"
```

If you want more than one scan to be part of the HTML file, you should add the command line switch /GROUPSCANS. When exporting to HTML without an included image, you could alternatively use the switch /APPENDTOFILES. Without one of these flags, the HTML file will get overwritten.

/IMPORT
<filename>

This option can only be used in combination with the command line option [/SEARCH](#)"^[170].

Loads a list of paths into the user interface of the TreeSize [file search](#)"^[97]. The file can be in .txt, or .csv format. This parameter can be used to import results of a previous search. The imported files and folders can be moved/copied/deleted/archived, like any "live" search result, using the [file operation dialog](#)"^[130].

Example:

```
Treesize /SEARCH /IMPORT "C:\Results\filelist.txt"
```

You can also combine this parameter with the parameters [/RECYCLE](#)"^[169], [/DELETE](#)"^[163], or [/MOVE](#)"^[168] to automatically delete or move the files that are contained in the text file. Example:

```
Treesize /SEARCH /IMPORT "C:\Results\filesToDelete.csv" /RECYCLE
```

/IMPORTPATTERNS
<filename>

Imports a list of patterns from a file. The file can be a simple text file with a list of filter patterns, separated by semicolon, or you can use the user interface to create a more complex set of patterns and use the export function to generate the pattern file in the XML format. Supported formats are CSV, TXT, and XML.

The imported patterns will be used as filters for the scan to either include, or exclude specific files and folders.

If used in combination with the command line option [/SEARCH](#)"^[170], this parameter will create a new [advanced search](#)"^[118] that uses the patterns from the imported file as criteria for the search.

This example will import filter patterns that are defined under "C:\TreeSizeFiles\patterns.txt", start a scan for drive C:\ and export the results to an HTML file:

```
Treesize /IMPORTPATTERNS "C:\TreeSizeFiles\patterns.txt" /SCAN "C:\" /HTML "C:\Results\scanC.html"
```

/LISTSEPARATOR
<separator char>

Enables you to define the separator used when exporting text or CSV files. Text files use the tabulator by default, CSV-files the list separator from the regional settings of the Windows control panel. Please specify a single character or the string "TAB" for tabulator after this switch. Examples:

```
Treesize /SCAN "C:\" /LISTSEPARATOR ; /TEXT "C:\Results\c.txt"
Treesize /SCAN "C:\" /LISTSEPARATOR TAB /TEXT "C:\Results\c.csv"
```

/MOVE
<path>

This option can only be used in combination with the command line option [/SEARCH](#)^[170]. It moves the results of a TreeSize [file search](#)^[97] to another location.

The following command will search on your local drive C: using the latest search options and moves the search results to the folder "C:\Temp\ObsoleteFiles":

```
Treesize /SCAN "C:\" /SEARCH:Start /MOVE "C:\Temp\ObsoleteFiles"
```

See also: [File operations](#)^[130]

/NOGUI

No window will be shown and the application will not appear in the task bar. Useful to execute scans or searches in background, without visual feedback.

Caution: Use this switch only if you have tested the rest of the command line options because error messages cannot be displayed in this mode. However, errors will be logged in the Windows event log.

/NOHEADERS

Omits the header lines usually written on top of scan or search export files. This makes it easier to receive plain data for postprocessing.

/NOUNITS

Omits the units usually written after size values. This option in combination with /SIZEUNIT 0 will export plain byte values. This makes it easier to receive plain data for postprocessing.

Please note: This command line will only effect exports of the directory tree, generated by using the /TEXT, /EXCEL, /HTML, /EMAIL, or /PRINT options. /EXTENSIONSList, /USERSList, /EXPORTDRIVESList, or /TOPFILESList will not be effected.

/OPEN
<filename>

Opens a saved [XML report](#)^[11] on application start. Example:

```
Treesize /OPEN "C:\Reports\Drive_C.xml.zip"
```


- /OPTIONS**
<filename> Use this parameter to apply exported user settings to TreeSize. User settings can be exported at "File > Options > Export". Example:
- ```
Treesize /OPTIONS "C:\Temp\User Settings.xml"
```
- Hint: Change as many settings as possible in the user interface before saving the options to reduce the amount of command line parameters you need.
- /PDF** Saves the results to a PDF file after the scan or search is finished. The application will terminate itself after saving. The following example will execute a scan of your local drive C: and save the results to a PDF file:
- ```
Treesize /SCAN "C:\\" /PDF "C:\Results\C_scan.pdf"
```
- /PIECHART**
<filename> Saves the pie chart of the scanned directory to a bitmap, GIF, PNG, or JPEG file. The file type depends on the extension of the specified file name. The following example will scan drive C: and export a pie chart in PNG format:
- ```
Treesize /SCAN "C:\\" /PIECHART "C:\Reports\C_pie.png"
```
- /PRINT** Prints a report for the scanned directory tree using default printer configured in your system settings. The application will be terminated after printing. Example:
- ```
Treesize /SCAN "\\SERVER\USERS" /PRINT
```
- /READONLY**
MODE
<value> If the value is set to `true`, this option activates a read-only mode in which file operations (e.g. move, or delete) are disabled, so it will be usable as reporting tool only.
- Start with a value of `false` to deactivate the read-only mode again.
- /RECYCLE** This option can only be used in combination with the command line option [/SEARCH](#)^[170]. Moves all files to the recycle bin that have been found as result of a TreeSize [file search](#)^[97]. Example:
- ```
Treesize /SEARCH:Start /SCAN "C:\temp" /FILTER "*.tmp" /RECYCLE
```
- See also: [File operations](#)<sup>[130]</sup>
- /RESTRICT**  
**EDMODE**  
**<value>** If the value is set to `true`, this option activates a restricted mode in which many features are disabled that are not of interest for "normal" (non-admin) users. Among the disabled features are: Check for Update, Open Software applet of Windows Control Panel, Schedule TreeSize scans, connect network drive, configure Windows System Restore, Run as administrator, exports, and apply NTFS compression. You can supply a path that should be scanned, e.g. the user's home directory, at the command line or using the [Startup Paths](#)<sup>[95]</sup> in a saved configuration file.
- Start with a value of `false` to deactivate the restricted mode again.

If you additionally activate the option [/READONLYMODE](#)<sup>[169]</sup>, the user won't be able to delete or move files in TreeSize, so it will be usable as reporting tool only.

**/SCAN**  
**<path|**  
**filename>**

Defines which drive, or path should be scanned. The scan path should be used as value for this parameter.

If, for instance, drive D:\ should be scanned, you can use:

```
Treesize /SCAN "D:\"
```

If you don't want to scan the whole drive, you can also specify a path, which is used as starting point for the scan. For example:

```
TreeSize /SCAN "\\Server\Share\MyDocuments"
```

Multiple scan paths are also possible, they are separated by a blank. Paths containing a blank have to be quoted ("). Example:

```
Treesize /SCAN "C:\Program Files\" "C:\Windows"
```

The wildcards "\*" and "?" are allowed. Example:

```
Treesize /SCAN "H:\users\A*"
```

You can also specify a text file, which contains a list of paths that should be scanned. TreeSize will scans all paths that are found in the text file, which is specified after this switch. The text file must contain one path per line. The following example scans all paths that are found in the file "D:\PathsToScan.txt" and writes each scan result to a separate sheet in an Excel File with today's date:

```
Treesize /SCAN "D:\PathsToScan.txt" /EXCEL "D:\Results\%DATE%.xlsx"
```

You may also call TreeSize in a "for" loop with one of the paths only, please find an [example below](#)<sup>[173]</sup>.

**/SEARCH**

Opens the [File Search](#)<sup>[97]</sup> window of TreeSize. If ":Start" is added to this command line option, the search is started automatically. A previously [saved XML file containing search settings](#)<sup>[99]</sup> may be passed, these settings will then be used to perform the search. Please note that files which are found in this search are automatically checked. The following example performs the search with settings that have previously been saved to the file "SearchSettings.xml" and saves the results to at text file:

```
Treesize /SEARCH:Start /OPTIONS "SearchSettings.xml" /TEXT "T:\SearchResult.txt"
```

Hint: In general, the last search settings or a former saved set of search settings will be used. However, you can also specify the search patterns for the [advanced search](#)<sup>[118]</sup> using the /FILTER command line option.

**/SHEETNAME**  
**<title>**

Enables you to specify the name of the sheet that will be added to an Excel file when using the [/EXCEL](#)<sup>[164]</sup> command line switch. Please note that an Excel sheet name must be unique in an Excel file and certain special characters like slashes,

backslashes and colons are forbidden. TreeSize will always create a unique sheet name by replacing invalid character with underscores and by adding date and time if necessary. If a sheet with the specified name already exists in the target file, a new sheet with a unique name is created. Use the command line option /APPENDTOFILES to append the data to the existing sheet.

**/SHORTDATEFORMAT**  
**<format>** Alters the short date format for this process, which can be configured in the regional options of the Windows Control Panel. Exports of TreeSize will use this format for date values. Example:

```
Treesize /SCAN "E:\" /SHORTDATEFORMAT YYYY-MM-DD /TEXT "D:\export.txt"
```

**/SIZEUNIT**  
**<n>** This option can be used to specify the unit to be used for displaying size values: N can have the values 0 to 5 which mean: 0 = Bytes, 1 = KB, 2 = MB, 3 = GB, 4 = TB, 5 = Automatic Units. Without this option the last used configuration in TreeSize will be used.

**/SORTBY**  
**<ColumnName>** Enables you to specify by which value the generated exports will be sorted. Possible values are column names like "Size" or "Name". The last used sort type in the TreeSize user interface will be used by default. Example:

```
Treesize /SCAN "E:\" /SORTBY Size /TEXT "D:\export.txt"
Treesize /SCAN "E:\" /SORTBY Name /EXCEL "D:\export.xlsx"
```

**/SUBJECT**  
**<subject>** This option allows you to customize the subject that will be used for emails that are sent at the end of the scan. Example:

```
Treesize /SCAN "\\Server\Share" /EMAIL
treesize@example.com /SUBJECT "TreeSize Professional Scan
Report"
```

**/TEXT**  
**<filename>** Saves the results to a text or CSV file after the scan or search is finished. The application will terminate itself after saving. The following example will execute a scan of your local drive C: and save the results to a text file:

```
Treesize /SCAN "C:\" /TEXT "C:\Results\C_scan.txt"
```

The text format uses a tabular format targeting human readers. If the filename references a CSV file, the CSV format will be used instead automatically. If you want to use the CSV format explicitly, we recommend to use the [/CSV](#) <sup>162</sup> parameter.

**/TITLE**  
**<title>** Can be used to replace the path of a scan with a custom text. This allows to provide more meaningful names for UNC paths and thereby increase the readability of a report. A title will be applied to the following scan target. Example:

```
Treesize /SCAN "\\Server3\C$" /TITLE "C: on Data server
3" /PRINT
```

In the context of a TreeSize file search, this parameter can be used to name an advanced search. Example:

```
Treesize /SEARCH:Start /SCAN "C:\" /TITLE "Image
files" /FILTER "*.jpg;*.png;*.bmp" /PDF "C:
\Results\C_search.pdf"
```

**/TOPFILESLIST**  
**<filename>**

This option enables you to save the contents of the Top files list to an Excel, HTML, Text, or CSV file. The file type depends on the extension of the specified file name. Example:

```
Treesize /SCAN "C:\" /TOPFILESLIST "C:\Temp\C_top_files.txt"
```

**/TREEMAP**  
**<filename>**

Saves the treemap chart of the scanned directory tree as bitmap, GIF, PNG or JPEG file. The file type depends on the extension of the specified file name. Example:

```
Treesize /SCAN "C:\" /TREEMAP "C:\Dokumente\treemap.jpg"
```

**/USERSLIST**  
**<filename>**

This option enables you to save the statistics showing the results grouped by username to an Excel, HTML, Text, or CSV file. The file type depends on the extension of the specified file name. The exported columns will be those that were enabled in the user interface on the tab "Users" when it was last used, or at the time when the configuration file supplied via [/OPTIONS](#)<sup>[169]</sup> was written.

The following example scans drive C: and creates an Excel file in "C:\Temp" with the statistics of the users on this drive:

```
Treesize /SCAN "C:\" /USERSLIST "C:\temp\C_users.xls"
```

**/USERNAME**  
**<username>**

Specifies the username that should be used to authenticate for the scans. Use **/PASSWORD** to specify a password for this username. It is recommended to instead use the Microsoft tool [RUNAS](#).

**/USERFILTER**  
**<username>**

With this option only files owned by a certain user will be taken into account when scanning. Provide the name of this user after this switch. Please note that you cannot use multiple user names here, but the wildcards "\*" and "?" are supported. Example:

```
Treesize /SCAN "\\Server\GroupDrive" /USERFILTER miller
```

**/USERSCHART**  
**<filename>**

Saves the small graph shown on the bottom of the ["Users"](#)<sup>[43]</sup> page to an image file (bitmap, GIF, PNG, or JPEG).

**/USERSPIECHART**  
**<filename>**

Saves a pie chart that shows the ["user statistics"](#)<sup>[43]</sup> of the current scan to an image file (bitmap, GIF, PNG, or JPEG).

**/VIEWTYPE**  
**n**

Defines on which values the "Percent of Parent", the "Growth" columns and the "Age of Files" chart are based. Possible values are:

- 2: Size
- 3: Allocated Space (Size on disk)
- 7: Number of Files

**/XML**  
**<filename>**

Saves the scan results to a XML file that can be loaded for comparisons at a later date. Example:

```
Treesize /SCAN "H:\users\" /XML "C:\Results\Allusers.xml.zip"
```

This option can be combined with the /EXPAND switch to limit the exported directories.

**Please note:** When loading a limited XML export to TreeSize, you cannot navigate through the complete directory branch, but only the exported directories.

**/ZIP**  
**<filename>**

This option can only be used in combination with the command line option [/SEARCH](#)<sup>[170]</sup>.

All files that have been found as result of a TreeSize [file search](#)<sup>[97]</sup> will be moved into a zip archive. Example:

```
Treesize /SEARCH:Start /SCAN "C:\" /ZIP "C:\OldFiles\Archive.zip"
```

See also: [File operations](#)<sup>[130]</sup>

**<SCANPAT**  
**H>**

In addition to the parameter /SCAN, you may also pass one or more paths at the end of the command line.

This example scans the "Program Files", and the "Windows" folder, and creates a text report under "C:\Reports\ScanResults.txt":

```
Treesize /TEXT "C:\Reports\ScanResults.txt" "C:\Program Files" "C:\Windows"
```

In case an error occurs, it will be returned as Windows error code in the exit code of the process. Environment variables (e.g. %APPDATA%) can be used in file names for the export as well as in the scanned paths.

## Scanning Multiple Directories

If you need to scan multiple directories, it might be a good idea to merge several calls in a Batch file, for example:

```
START /WAIT "TreeSize" "C:\Program Files\JAM Software\TreeSize\Treesize.exe" /SCAN "\\Server\Share1" /EXCEL "D:\Share1.xls"
```

```
START /WAIT "TreeSize" "C:\Program Files\JAM Software\TreeSize\Treesize.exe" /SCAN "\\Server\Share2" /EXCEL "D:\Share2.xls"
```

```
START /WAIT "TreeSize" "C:\Program Files\JAM Software\TreeSize\Treesize.exe" /SCAN "\\Server\Share3" /EXCEL "D:\Share3.xls"
```

The command "START /WAIT" ensures that the jobs start sequentially. Not starting the jobs parallel is usually better because a single job takes more advantage from caches and system resources. It is also possible to store the shares that should be scanned in a text file and use the Windows "for" command like this:

```
FOR /F %p IN (Paths.txt) DO START /WAIT Treesize.exe /SCAN "%p" /EXCEL "c:\temp\TreeSize-Reports-%DATE%.xls"
```

```
FOR /F "tokens=1" %i IN (Shares.txt) DO START /WAIT Treesize.exe /SCAN "\\Server\%i" /EXCEL "c:\temp\%i.xls"
```

**Please note:** The double percent characters are required in batch files, on the command line use a single percent only.

### Scheduled Start

You can use the Windows Scheduled Tasks to run TreeSize with certain command line options daily, weekly, or monthly at a certain time. The "[Schedule Dialog](#)"<sup>149</sup> of TreeSize will help you setting up a scheduled task.

You can also use the "SCHTASKS" command to perform scheduled scans. If you, for example, want to scan the drives C: and E: next night at 03:00 a.m. and save the results to an Excel file, you could use the following command line:

```
SCHTASKS /Create /SC DAILY /ST 03:00 /TN TreeSizeScan /TR "'C:\Program
Files\JAM Software\TreeSize\Treesize.exe' /SCAN C:\ E:\ /EXCEL C:
\Temp\tsp.xls /EXPAND 2"
```

Get help about the "SCHTASKS" command on [Microsoft's pages](#) or by typing:

```
SCHTASKS /Create /?
```

**Please note:** Error messages occurring during scheduled scans are listed in the systems Windows event log.

### PowerShell

Windows PowerShell can be useful in combination with TreeSize. This example shows how to search a couple of remote computers that are queried using an LDAP query in the Active Directory (AD):

```
$computer = Get-ADComputer -SearchBase "ou=client
computers,ou=intranet,dc=intranet,dc=jam-software,dc=com" -Filter *
foreach ($comp in $computer.name)
{
 $path = "\\$comp\C$\Windows"
 Add-Content Scan.txt "$path"
}
#debug
Get-Content -Path Scan.txt
start TreeSize with the collected paths
&"C:\Program Files\JAM
Software\TreeSize\Treesize.exe" /SEARCH:Start /SCAN Scan.txt /FILTER
*.exe /Export FoundFiles.txt
```

### Redirecting Output

If no other export target is given, TreeSize will write a short export of the scan to the standard output, and errors that occurred during the scan to the standard error.

You can redirect these output streams on the command line (cmd.exe) using the pipe symbol, e.g.

```
"C:\Program Files\JAM Software\TreeSize\Treesize.exe" /NOGUI /SCAN C:\
1>StdOut.txt 2>StdError.txt
```

To redirect the output using the PowerShell, please use the Start-Process command instead, e.g.

```
Start-Process -FilePath "C:\Program Files\JAM
Software\TreeSize\Treesize.exe" -ArgumentList "/NOGUI /SCAN C:\" -
RedirectStandardOutput ".\StdOut.txt" -RedirectStandardError ".
\StdError.txt"
```

## Windows Scripting Host

If you intend to use the Windows Scripting Host (WSH), your command to start TreeSize will look like:

```
Set Shell = CreateObject("WScript.Shell")
Shell.Run "" "C:\Program Files\TreeSize\Treesize.exe" /XML "C:
\Reports\drive_c.xml.zip" /SCAN "C:\" ""
```

## Exit Codes

If the operation was completed successfully, the exit code is 0. If an error occurred TreeSize will return a [Windows error code](#) as exit code if available, or 1 to indicate a general error. In any case the Windows Event Log will contain further information in the "Application" log, Event Source "TreeSize".

## 8.3 How to schedule a file search

Like the main module, the TreeSize File Search can also be scheduled as a task, that runs at certain times. The general approach to create such a task is to set up a search in the user interface and then selecting ["Tools > Schedule current search"](#)<sup>[105]</sup> from the ribbon menu.

The following description shows an example configuration and demonstrates the different steps that are necessary to create your own, customized search task.

### Step 1: Set up a search via user interface

The file search offers a vast variety of different options that can be customized to your specific use case. The first step in creating a task is to set up either one of the predefined search types, or to create a new [custom search](#)<sup>[118]</sup>. Any combination of options, including the selection of multiple different searches, is possible.

### Step 2: Execute the search and check the results

Once you have set up the search, it is best to execute it and validate that it returns the desired results. The more specific a search is, the more likely it is that you need to do a bit of tweaking to ensure that only the results are returned that match your given use case.

### Step 3: Create a task with the current search settings

The final step is to open the [schedule dialog](#)<sup>[149]</sup>, using the option ["Tools > Schedule current search"](#)<sup>[105]</sup> from the ribbon menu. At this point, TreeSize will automatically take your current search parameters and create an option file

that represents the search that was just set up. Under ["Options"](#)<sup>[150]</sup>, you can see that the file was automatically included to the task.

**Please note:** Any previous selection that was made in the ["File operation"](#)<sup>[130]</sup> dialog, such as the creation of a log file, or the different "Move options" will be added to the options file as well. If you add any type of file operation to the task, it will use these settings as well.

After setting up the task with the desired schedule options and defining export or move operations, you can review the [command line parameters](#)<sup>[160]</sup> under "Command Line". Here, you can also test the current task, copy its parameters to the clipboard, or create a batch file.

Once everything is set up, click "Save Task" and enter your credentials, to create a new task and add it to Windows' task library.

## 8.4 How to schedule a move or delete operation

This chapter explains how you can set up a search that automatically moves all files and folders that were found to another location. This also applies if you want to delete, archive, or copy the search results with the help of an automated task, or batch file.

The basic steps that are required for the creation of an automated search can be found in [the previous chapter](#)<sup>[175]</sup>. The same steps are needed, if you want to create a task that automatically moves the search results. Make sure that the search configuration that you want to schedule will **only** return files that you actually want to move, delete, copy, or zip.



**File Operation**

Choose a destination and configure the options.

Total size of checked items: 179 MB  
Number of checked items: 938

**File Operation**

☐ Delete items  
☒ Move items  
☐ Copy items  
☐ Zip items  
☐ Pass items to executable as parameter

Destination: C:\Users\smith\AppData\Local\Temp\ObsoleteFiles

**Options**

☒ Skip existing files  
☐ Leave shortcut at original location pointing to new location  
☐ Delete empty directories after the operation  
☐ Preserve permissions of the original items  
☒ Preserve directory structure, starting from level: 0  
☐ Preserve timestamps of the original items

**Logging**

☐ Log performed operations to:  
☐ Create Undo script (if possible):

Help Execute Cancel Save & Close

The scheduler dialog allows the same configuration for file operations that can be made via the normal user interface. All the options that are referred to in chapter "[File operations](#)"<sup>[130]</sup> apply here as well.

Simply select the desired file operation and its related options. **It is highly recommended** to use the option "Log performed operations to", in order to create a log file that documents what files were affected.

## 9 Tips & Annotations

- Especially scans of larger network drives may take a long time. With the Professional Edition you may perform such scans overnight using [Scheduled Scans](#)<sup>[149]</sup> and save the results to a XML file which can be loaded again later.
- Use the [TreeSize File Search](#)<sup>[97]</sup> to find obsolete files on your hard drives.
- TreeSize supports drag&drop file system operations in many places.
- For continuous analyzing of disk usage on large servers we recommend our product **SpaceObserver**. It collects the data using a background system service and stores it in a SQL database. It uses less RAM than TreeSize, and the reporting capabilities are more flexible because it is built on a database. More information is available at <https://www.jam-software.com/spaceobserver/>

### 9.1 Notes on NTFS

The file system NTFS can be used with the operating system Windows NT or later. It offers some special features which also have effects for TreeSize. We will describe some of these features and their impacts on this software in the following paragraphs.

#### Access Control Lists

The way users can access files and folders can be restricted. One can grant or deny other users or groups certain rights like reading, writing, executing or deleting. That way one can even deny administrators to access files and folders. If an administrator tries to access a folder in the Windows Explorer to which the owner denied any other users reading access, an "Access Denied" error message will be displayed. However, TreeSize is able to scan such folders, if you are logged in as administrator or as a user that has the right to perform backups (This option can be changed at "Control Panel > Administrative Tools > Local Security Policy" and with the user editor of Windows).

#### File Based Compression

NTFS supports compression on an individual file basis. Files that are compressed on an NTFS volume can be read and written without first being decompressed by another program. Decompression happens automatically and transparently during the reading of the file. The file is compressed again when it is saved.

The space occupied by a compressed file is usually much smaller than its normal size. As a consequence, for folders that are partially or completely compressed, the allocated space reported by TreeSize may be smaller than the size reported for this folder. TreeSize is able to show the compression ratio in an extra column on the "Details" tab. Additionally it can show compressed files and folders in a different color. These features can be turned on or off in the [Options](#)<sup>[66]</sup> dialog.

TreeSize is able to compress and decompress entire file system branches using the context menu.


In Windows 10 Microsoft introduced new transparent compression-features in NTFS, designed to compact the files of the operating system, mainly DLL and EXE files. In contrast to old file based compression, these files are not flagged as compressed in their file attributes.

### Sparse Files

Files which are large but only partially used are called [sparse files](#). Because the operating system does not allocate disk space for the unused parts of a sparse file, it occupies less disk space than its actual size is. TreeSize treats sparse files like compressed files and also calculates the compression ratio for them.


### Reparse Points: Volume Mount Points and Symbolic Links

A volume mount point is an existing path where you "mount" another volume. Given this, users and applications can refer to the mounted volume by that path. There is no need to assign a drive letter to this volume. It allows you to unify multiple file systems into one logical file system. Symbolic links, also known as junction points, work similar: If you for example have an empty folder "C:\Documents\Images", you can create a symbolic link to "E:\Pics" for it. Applications will then see the content of "E:\Pics" in "C:\Documents\Images". Unlike an NTFS junction point a symbolic link can also point to a file or remote SMB network path.

If the [Option](#)  "Follow Mount Points and Symbolic Links" is turned on, TreeSize will include the contents of these folders when scanning. Since they are not physically stored on the drive you are scanning, this may produce results for the allocated space that are larger than the total size of the drive.

### Alternate Data Streams (ADS)

In NTFS, a file consists of different data streams. One stream holds the security information (access rights and such things), another one holds the "real data" you expect to be in a file. There may be alternate data streams, holding data the same way the standard data stream does. These alternate data streams are hidden. That means that you can have a file with 1 byte in the official main data stream and some hundred MB in one or more alternate data streams. The dir command, file managers or windows explorer will show 1 byte as the size of this file, but it actually allocates much more space on your hard drive.

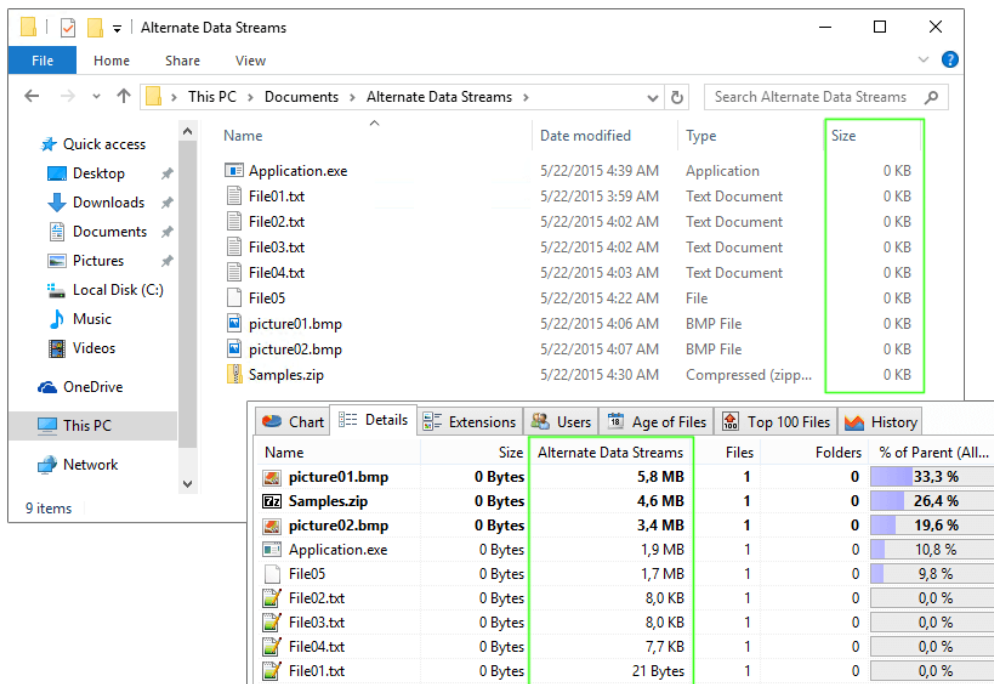

TreeSize can detect alternate data streams and add their sizes to the allocated file size.

Please note: ADS may store information in the same cluster as the main data stream, so if a file has one or more ADS, this file does not necessarily allocate more disk space.

You can choose to detect alternate data streams, to get a more accurate allocated space of directory branches, in the TreeSize [Options](#) dialog. This option is deactivated by default, because querying the ADS takes some time and increases the overall time needed for a scan. You can search for files containing alternate data streams using the Custom File Search of TreeSize.

## Hardlinks

In a Windows environment a hardlink is a reference, or pointer, to physical data on a NTFS storage volume. All named files are hardlinks. The name associated with the file is simply a label that refers the operating system to the actual data. On NTFS volumes, more than one name can be associated with the same data. Though called by different names, any changes made will affect the actual data, regardless of how the file is called at a later time. Hardlinks can only refer to data that exists on the same file system. The data is accessible as long as at least one link that points to it exists. When the last link is removed, the space is considered free. Please note that all hardlink pointing to the same file share also the same Security Descriptor (access permissions).

To create a hardlink, the user must have write permissions for file attributes on the respective folder branch and on the share, if the drive is not a local drive.

If more than one hardlink points to a file's data, the space is allocated only once by these files, no matter how many hardlinks exists. In the [Options](#) dialog you can tell TreeSize to detect hardlinks, to get a more accurate allocated space of directory branches. This option is deactivated by default, because

querying the hardlinks takes some time and increases the overall time needed for a scan.

### Automatic Data Deduplication

Windows Server 2012 and later offer a data deduplication feature: The data deduplication segments files with fractionally equal content into so-called "chunks" which are moved into the subfolder "System Volume Information\Dedup\ChunkStore\" located on the corresponding NTFS partition. After the deduplication has been applied by Windows, the original data is replaced by a pointer to the corresponding chunk in the ChunkStore directory. After they have been deduplicated by the NTFS deduplication two identical files will only require half of the disk space they occupied before. Since the original files now only contain a small pointer instead of the data, the allocated disk space will be indicated by Windows with a much smaller value than before (for two identical files the occupied disk space would be indicated as "0 Byte"). To make TreeSize show the original file and folder sizes, simply switch the view mode from "Allocated Space" to "Size". The "Allocated Space" shown in TreeSize is the disk space you would obtain by deleting the corresponding file.

### Offline Files

Windows Server and some 3rd party tools and appliances offer a feature called "offline files": Files that have not been used for a long time will be automatically moved to cheaper and slower storage, and a small stub file remains at its original location. Usually TreeSize reports the allocated space of such a stub file correctly, which is often only the size of one file system cluster.

There is however one situation in which the allocated space for stub files may not be reported correctly. In case TreeSize runs into Access Denied errors, it uses Windows API functions intended for backup software in order to be able to scan also those parts of the file system and provide values for their size and allocated space. We have seen some appliances which reported the full file size as allocated space in this case for the stub files, most likely because this would be the size occupied in a backup. To avoid this, ensure that the user which runs the scans has full read access to the scanned file system.

## 9.2 Wasted Space

The wasted space is the amount of space in clusters on your hard disk that are not entirely filled. This is the last (or only) block of a file. The FAT32 file system may have very large cluster sizes, depending on the partition size.

| FAT32          |                      |
|----------------|----------------------|
| Partition Size | Default Cluster Size |
| 01 - 08 GB     | 4 KB                 |
| 08 - 16 GB     | 8 KB                 |
| 16 - 32 GB     | 16 KB                |
| >32 GB         | 32 KB                |

If you have a FAT32 with a size of 32GB or more, a cluster size of 32KB will be used on it. If you store 10 files of 1 KB on this partition, this would use  $10 * 32\text{KB} = 320\text{KB}$  of disk space, and  $320\text{KB} - 10\text{KB} = 310\text{KB}$  would be wasted. Especially a huge number of small files significantly increases the amount of

wasted space on FAT32 partitions.

To reduce the wasted space, you can format your hard disk with the [NTFS file system](#)<sup>178</sup>. It usually operates with a cluster size of 4KB and so stores small files more effectively.

## 9.3 Regular Expressions

Regular expressions describe patterns in strings and can be used i.a. to determine whether a given pattern occurs in a text or not. In TreeSize regular expressions can be used to find specific files and / or folders that match the criteria specified by regular expressions

The following table shows some examples:

| Expression                       | Syntax | Description                                                                                                                                                  | Example                                                                                                                                                     |
|----------------------------------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Any character                    | .      | Matches any single character except a line break.                                                                                                            | <b>a.o</b> matches "aro" in "around" and "abo" in "about" but not "acro" in "across".                                                                       |
| Zero or more                     | *      | Matches zero or more occurrences of the preceding expression, and makes all possible matches.                                                                | <b>a*b</b> matches "b" in "bat" and "ab" in "about".<br><b>e.*e</b> matches the word "enterprise".                                                          |
| One or more                      | +      | Matches at least one occurrence of the preceding expression.                                                                                                 | <b>ac+</b> matches words that contain the letter "a" and at least one instance of "c", such as "race", and "ace".<br><b>a.+s</b> matches the word "access". |
| Beginning of word                | <      | Matches only when a word starts at this point in the text.                                                                                                   | <b>&lt;in</b> matches words such as "inside" and "into" that begin with the letters "in".                                                                   |
| End of word                      | >      | Matches only when a word ends at this point in the text.                                                                                                     | <b>ss&gt;</b> matches words such as "across" and "loss" that end with the letters "ss".                                                                     |
| Any one character in the set     | []     | Matches any one of the characters in the []. To specify a range of characters, list the starting and ending characters separated by a dash (-), as in [a-z]. | <b>be[n-t]</b> matches "bet" in "between", "ben" in "beneath", and "bes" in "beside" but not "bel" in "below".                                              |
| Any one character not in the set | [^...] | Matches any character that is not in the set of characters that                                                                                              | <b>be[^n-t]</b> matches "bef" in "before", "beh" in "behind", and "bel" in "below", but not "ben" in "beneath".                                             |

|                                      |     |                                                                                                                                                                            |                                                                                                                                                    |
|--------------------------------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
|                                      |     | follows the ^.                                                                                                                                                             |                                                                                                                                                    |
| Or                                   |     | Matches either the expression before or the one after the OR symbol ( ). Mostly used in a group.                                                                           | <b>(sponge mud)</b> matches "sponge bath" and "mud bath."                                                                                          |
| Tagged expression (or backreference) | \   | Matches the character that follows the backslash (\) as a literal. This lets you find the characters that are used in regular expression notation, such as { and ^.        | <b>\^</b> searches for the ^ character.                                                                                                            |
| Markierter Ausdruck                  | { } | Matches text that is tagged with the enclosed expression.                                                                                                                  | <b>{does}n't</b> identifies the text that precedes the replacement in the replace string \1 not to change every occurrence of doesn't to does not. |
| Repeat n times                       | ^n  | Matches n occurrences of the preceding expression.                                                                                                                         | <b>[0-9]^4</b> matches any 4-digit sequence.                                                                                                       |
| Grouping                             | ()  | Lets you group a set of expressions together. If you want to search for two different expressions in a single search, you can use the Grouping expression to combine them. | If you want to search for <b>[a-z][1-3]</b> or <b>[0-9][a-z]</b> , you would combine them: <b>([a-z][1-3])([0-9][a-z])</b> .                       |

Further examples:

|                                              |                                                                                           |
|----------------------------------------------|-------------------------------------------------------------------------------------------|
| <b>[0-9] or \d</b>                           | Find all files/folders with at least one digit in its name.                               |
| <b>a b</b>                                   | Find all files/folders containing "a" or "b" in their name.                               |
| <b>(?=.*a)(?=.*b)</b>                        | Find all files/folders containing at least one "a" character and one "b" character.       |
| <b>((?=.*help)(?=.*online))(*?=.*readme)</b> | Find all files/folders containing the words 'help' and 'readme' or 'online' and 'readme'. |

|                                      |                                                                                                                                       |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| [^(A-Za-z)]                          | Find all files/folders containing at least one other symbol than a character in their name.                                           |
| ^E[0-9]{7}\$                         | Find all files/folders which start with an "E" followed by exactly 7 digits.                                                          |
| C:\\Windows\\[^\\]*\\.\\[^\\]*\$     | Find all files/folders whose parent folder is "C:\\Windows".                                                                          |
| [A-Za-z]:\\([\\^\\]+\\){2,4}[^\\]+\$ | Find all files/folders with a folder depth of at least 2 and at most 4.                                                               |
| [\\x00-\\x7F]                        | Find all files/folders with invalid ASCII characters.                                                                                 |
| [^\\P{C}]                            | Find all files/folders with Unicode characters which cannot be printed.                                                               |
| [\\xA0]                              | Find all file/Folder names that contain the non-breakable space character (Unicode NOBR, U+00A0) instead of a normal space character. |
| [~\\\"#%&\\*\\:;<>\\?\\V\\{\\}]      | Find all files and folders, that contain characters in their name which are invalid on <b>SharePoint</b> servers.                     |

Further information and additional examples can be found [here](#).

A description of all special characters that can be used with regular expression can be found [here](#).

For further help in forming regular expressions following tools can be used:

<http://gskinner.com/RegExr/> (online)

<http://regexpal.com/> (online)

<http://sourceforge.net/projects/regexpeditor/> (download)

<http://sourceforge.net/projects/regextester/> (download)

<http://sourceforge.net/projects/regaxe/> (download)

## 9.4 Translations

We are proud of the popularity of our award-winning disk space management software TreeSize and would love to offer it to everyone in her/his native language. In this way, all our worldwide users can enjoy localized TreeSize software with ease. TreeSize is already available in **German** and **English**. Thanks to the help of our great volunteer translators we are able to provide these translations:

**Bulgarian:** Thanks to 3 anonymous translators

**Chinese (Simplified):** Thanks to streambun, Adrian Zhang, 偶爱偶家, CJKCHINA, Neptune, Zhihao Wang, and 4 anonymous translators



**Czech:** Thanks to Trasak Jiri, Lukáš Francálek, Azurác, Fishbone, and 3 anonymous translators

**Danish:** Thanks to Svend Heinesen, Thomas Vedel, and 3 anonymous translators

**Dutch:** Thanks to Jaap Kramer, Kees Bakker, Linda Bijlsma, Leroux, and 4 anonymous translators

**French:** Thanks to Alexandre Mongin, Simon Martin, Ignace Le Roux, David Dissard, Gaillard S-G, and 5 anonymous translators

**Greek:** Thanks to GeoVasi69, Prodromos Makridis, and 2 anonymous translators

**Hungarian:** Thanks to Peter Bartfai, and 5 anonymous translators

**Italian:** Thanks to Spigolo, Luciano Paravella, Fabrizio Picconi, Lionello Ferrazzini, Daniele Caputo, David Coen, Gioele Mattioli, bovirus, Andrea "Echo" Zoppi, Mario Corrado, Alberto Donzelli, Ivan Vaselli, Filippo Rubulotta, and 6 anonymous translators

**Japanese:** Thanks to Kyotaro Iijima, Tetsuro Shimazaki, and Sriram Iyer

**Korean:** Thanks to Seungsoo Choi, and 8 anonymous translators

**Norwegian:** Thanks to Simen Andreas Skogheim, Isaac Daasnes, and 2 anonymous translators

**Polish:** Thanks to Franciszek, Your Majesty Bartłomiej Rakowiecki, Bartosz Malolepszy (Grodków), Arkadiusz Kurzawa, Lukasz K., and 8 anonymous translators

**Portuguese:** Thanks to Ricardo Freitas, Ian Lima Souza, Maria Pombo, Carlos Figueiredo, and 2 anonymous translators

**Russian:** Thanks to kopejkin, Polina Morgan, Vladimir Skovoroda, Alexander Vorfolomeev, Temtaime, Gennady Morozov, and 2 anonymous translators

**Slovenian:** Thanks to Jadran Rudec, Boštjan Pecovnik, and one anonymous translator

**Spanish:** Thanks to J. M. Fustero, MS-PC, Fabián C. Rodríguez, and 4 anonymous translators

**Ukrainian:** Thanks to kopejkin, and

Would you like to help us translate TreeSize to your language? Please find more information [online](#).

## 10 Copyright & Contact

Copyright ©1995-2022 by Joachim Marder e.K.

JAM Software GmbH  
Am Wissenschaftspark 26

54296 Trier  
Germany

WWW: <https://www.jam-software.com>

Support: <https://customers.jam-software.de/contact.php>

Email: [TreeSize@jam-software.com](mailto:TreeSize@jam-software.com)

Commercial registerHRB: 4920 (AG Wittlich)  
number:

VAT ID No.: DE234825349

Managing Director: Joachim Marder

- / -

/EXCEL 160  
/RESTRICTED 160

- [ -

[Files]-node 70

- \ -

\\servername\share 22

- 2 -

2FA 56

- A -

Access control 178  
Access Control Lists 178  
ACL 178  
active directory 43  
ADAL 56  
ADFS 56  
Administrator 15, 178  
ADMX 6  
ADS 62, 178  
advanced search 118  
age of files 45, 74  
allocated space 20  
Alternate data streams 39, 62, 178  
Amazon S3 22  
And 121  
Android 22  
Ansichten 30  
application menu 10  
application start 95, 148  
archive attribute 64  
archive obsolete files 130  
Attributes 39, 123  
Automated deletion 154  
Automated export 152  
Automated move 154  
automated scans 148  
automatic 176  
automatic updates 15  
automatic updates during scanning 66  
available columns 39

Azure Active Directory 56  
Azure Portal 56

- B -

bar chart 30  
basic 107  
biggest files 47  
blue colored objects 66  
bold folders 66  
bold texts 77  
Browse 25  
Bucket 22  
Buld rename 135  
burn files to optical media 130  
Bytes per cluster 181

- C -

change date 123  
change installation key 21  
Chart-Options 75  
Charts 30, 60, 75  
check 128  
checksum 112, 115  
ChunkStore 178  
clean up 128  
Cluster 181  
Cluster size 181  
columns 39  
command line 148  
command line options 160  
Command line parameters 157  
compare current scan 10  
compare file content 112, 115  
Compare with previous scan 54  
compare with saved scan 17  
Compare with snapshot 17, 54  
Comparing 54  
Comparison 54  
compressed files and folders 66  
Compression 178  
Configuration 121, 126  
configure file groups 72, 147  
Contact 185  
contents 5  
Contribute 184  
copy to clipboard 12  
Copyright 185  
cost column 66  
Creating snapshots 53

creation date 39, 123  
 CSV export 12, 86  
 Custom command line parameters 156  
 custom search 118  
 customizable search 118  
 Customize 126, 144  
 customize file age intervals 45  
 customize UI 14

## - D -

Daily 158  
 data export 12  
 date 123  
 date values 39  
 date/time format 66  
 decimals 20  
 Deduplicate 117  
 Deduplication 112, 115, 117, 178  
 default settings 6  
 definition 121  
 delete 176  
 delete files 130  
 Delete search results 154  
 Delete task 159  
 details 36  
   options 69  
 diagram 30  
 Dir Level 123  
 Dir Level (relative) 123  
 Directory 25  
 directory tree 27  
 drive list 20, 51  
 Duplicate 117  
 duplicate files 112, 115

## - E -

easy 107  
 Edit task 159  
 Email 91, 142, 152  
 EMC 53  
 empty recycle bin 19  
 Empty snapshot list 53  
 equal files 112, 115  
 Event log 159  
 Excel export 12, 81  
 exclude 127  
 exclude filter 64, 139  
 exit 10  
 Exit Codes 160

Expand level 150  
 Explorer context menu 97  
 Export 75, 152  
 export data 12  
 Export level 150  
 export list of files 12  
 export search results 99  
 export settings 141  
 extend maintenance 21  
 extensions 42  
 extensions statistics 62

## - F -

FAT file system 181  
 FAT32 181  
 file ages 45  
 File Content 108, 123  
 File ending 108  
 File extension 108  
 file extensions statistics 42  
 file groups 72, 147  
 file menu 10  
 file owners 62  
 file search 97, 138  
   drives 106  
   exclude filter 106  
   general 97  
   global exclude filter 106  
   paths 106  
   ribbon bar 99  
   search options 106  
 file search options 99, 106  
 file system tree 27  
 File Type 123  
 file types 42  
 file types statistics 62  
 Filename 135  
 Filter 64, 121, 127, 128, 150  
 filter settings 139  
 find 17  
 find duplicate files 112, 115  
 flexible search 118  
 format settings 145  
 full path 123  
 Full text search 108  
 full user name 43

## - G -

general options 137

general settings 137  
 Getting started 126  
 global exclude filter 127  
 gradient bars 70  
 group file extensions 72, 147  
 group scans 20, 160  
 grouping of Scans 70

## - H -

Hard link 117  
 Hard links 178  
 Hardlink 117  
 hardlinks 39, 62  
 header information 141  
 help 8, 21  
 history 49  
 How to 8  
 HTML 152  
 HTML export 12, 84

## - I -

import search results 99  
 include filter 64  
 input 107  
 installation 6  
 installation key 21  
 invalid shortcut 123

## - J -

JAM Software 185  
 Junction points 178

## - K -

Keyword 108  
 Knowledge Base 8

## - L -

last access date 39, 178  
 last accessed 123  
 last change 123  
 last change date 39  
 last Save Date 39  
 license 21  
 Link 117  
 Links 178

Linux 22  
 List of tasks 159  
 list separator 156, 160  
 load scan from XML 10  
 load search options 99  
 Localization 184  
 log 176  
 log file 130  
 long paths 66

## - M -

Mail 142  
 maintenance 21  
 Manage tasks 159  
 Manage Templates 147  
 manual 21  
 MAPI 142  
 mark 128  
 MAX\_PATH 66  
 MD5 checksum 112  
 MD5 hash 39  
 Meta data 123  
 MFA 56  
 Misc 148  
 mobile devices 22  
 mode 20  
 Monthly 158  
 Mountpoints 62, 178  
 move 176  
 move checked button 130  
 move files 130  
 Move search results 154  
 multi factor authentication 56

## - N -

name 123  
 NetApp 53  
 No snapshots listed 53  
 notifications 62  
 NTFS 117, 178  
 NTFS alternate data streams 62  
 NTFS file system 178

## - O -

Office 365 56  
 Offline files 64, 178  
 operations 128  
 Options 15, 60, 150

- options dialog 137
- Or 121
- Ordering 185
- Other 148
- overnight scans 148
- overnight search 175
- Overview 5, 8
- overview toolbar 20
- owners 43

## - P -

- path 123
- path length 39, 123
- pattern 139
- pattern preview 64
- PDF 152
- PDF export 12, 80
- PDF manual 21
- permissions 39
- Personalize 144
- pie chart 30
- portable installation 19
- PowerShell 130
- Predefined 126
- Previous versions 53
- print chart 13
- print directory 13
- print report 10
- printed report 77
- printer settings 77
- printing 13
- process 128
- Purchasing 185

## - Q -

- quick access toolbar 14
- quickstart 6, 8
- Quota management 43
- Quota usage 43

## - R -

- READONLYMODE 160
- recent changes 8
- recently scanned 66
- Recycle Bin 19, 130
- redundant files 112, 115
- RegEx 108, 182
- Registration 185

- Regular expression 64, 108
- Regular expressions 108, 182
- remove 127
- Rename 135
- Reparse points 178
- replace duplicates by hard links 112, 115
- Report 13, 152
- reset search options 99
- restricted mode 160
- results 128
- ribbon 14
- ribbon bar 9

## - S -

- S.M.A.R.T. 51
- S3 22
- save scan to XML 10
- save search options 99
- save search results 99
- Save to batch file 157
- Scan 25
- scan overview 20
- Scan path 150
- schedule 158, 176
- schedule dialog 149
- schedule file search 99, 175
- scheduled scans 148
- scheduled search 175
- search 108, 121
- Search & Replace 135
- Search and Replace 135
- search engine 138
- search filter 139
- Search Filters 147
- search for duplicate files 112, 115
- search for files 97
- search for files and directories 118
- search for redundant files 112, 115
- search in directory tree 17
- search options 99
- search PC 106
- Search results 128
- search syntax 107
- search whole domain 106
- search whole network 106
- Seiten 30
- settings 60, 137
- setup 6
- SHA256 checksum 112
- SHA256 hash 39

SharePoint 22, 130  
Sharepoint Online 22, 56  
show or hide 20  
silent installation 6  
size 123  
size changes 20  
size development 49  
size mode 20  
size of printed columns 77  
size on disk 20  
SMART values 51  
smartphones 22  
SMTP 142  
snapshot 17  
Snapshots 53  
Sort 150  
sorting 20  
Sparse files 178  
SSH 22  
start 8, 95, 148  
start as administrator 15, 95  
startup settings 148  
statistics 62  
status bar 20  
Stub files 178  
Symbolic links 62, 178  
Syntax 107, 108  
system restore 19

## - T -

take a visual tour 5  
Target 25  
task 176  
tasks 148  
Template 126  
Templates 147  
Test command line 157  
Text 152  
text explort 12  
text export 89  
thread priority 62  
threads 62  
Time 158  
time stamp 123  
tips & annotations 178  
tools 19  
tooltip 70  
Top 100 76  
top 100 files 47  
Top files 47, 76

Translations 184  
Translators 184  
Transport 142  
treemap 30  
TreeSize file search 97  
two factor authentication 56

## - U -

unattended installation 6  
UNC paths 22  
Unicode enabeld zip tools 134  
Unicode zip files 134  
unit 20  
Units 150  
Unix 22  
update 21  
USB stick installation 19  
Use 8  
use global exclude filter 112  
user defined cluster size 62  
user statistics 43, 62  
users 43

## - V -

view 20  
view options 145  
virtual root folder 70

## - W -

Wasted space 181  
WebDAV 22  
Weekly 158  
what's new? 8  
wildcard 121  
Windows Explorer context menu 97

## - X -

XLS 12  
XLSX 12  
XML 152  
XML export 88  
XML report 17, 160

## - Z -

ZIP file 130